# SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XXXVIII.—No. 26. [NEW SERIES.] NEW YORK, JUNE 29, 1878. [$3.20 per Annum. [POSTAGE PREPAID.]


## THE FIRMENICH SAFETY STEAM BOILER.

The annexed engraving represents the Firmenich safety boiler, which is claimed to contain a number of important advantages, and which, according to records of actual tests at the Centennial Exposition and elsewhere, has given successful results.

In Fig. 2 are illustrated the essential portions of a seventy-five horse power boiler of this type, from which the general method of construction will be understood. The mud drums, A, are connected by systems of slightly inclined tubes with the steam and water drums, B B. Through the space left between the tube section, at C, the bridge wall rises, and its effect is to cause the gases of combustion to take a course from the fire box upward over this wall, and then downward in the rear compartment, escaping through the smoke box into the chimney. The mud drums, heating tubes, and lower half of drums, B B, are filled with water, which is thus distributed over a large number of small spaces, the object of which is the heat resulting from combustion.

In Fig. 1 we represent two 150 horse power boilers of this system as put up for the Niagara Starch Works, of Buffalo. In the SCIENTIFIC AMERICAN of January 27, 1877, we represented this boiler incased in brickwork; it is now incased in a sheet iron jacket, as shown. This is stated to be cheaper and to occupy less room than the massive brickwork. A layer of brick is first placed around the boiler proper, and the space between this and the jacket is filled with ashes or other non-conductor.

In the large boilers there are two steam and water drums, and one steam drum above the tubes; in smaller ones of 50 horse power and below, only one drum is used. The lower or mud drums vary in diameter from 12 to 24 inches, and the upper ones from 27 to 40 inches, and in length from 6 to 18 feet, according to the capacity of the boiler. The heating tubes are from 2 to 3 inches in diameter, and from 3 to 16 feet long, arranged in two or three rows, expanded in the mud drums and water drums in the usual way. Large manholes are provided in all the drums to admit of easy access to the interior of the boiler.

Among the advantages claimed by the manufacturers are chiefly safety and economy. The boiler is made up entirely of tubes and small drums, to secure strength. It will also be observed that no part of the boiler is exposed to the intense heat of a smal. furnace, and that the furnace really constitutes the whole of the boiler, the heat being diffused over an exceedingly large surface, with the object of obtaining equality of expansion. The water tubes, in short, constitute the sides of the furnace. A perfect circulation is claimed to exist; a downward current taking place in those tubes most remote from the source of heat, causing the greater part of the scale to drop in the mud drums, from which it can be conveniently removed. As regards economy the Firmenich boiler, at the Centennial Exposition, produced, we are informed, the hottest and greatest quantity of steam per pound of anthracite coal. The cause of this economy the manufacturers state to be the large fire chamber, where more perfect combustion is secured than usual by giving ample room for the gases issuing from the coals to intermingle with the atmosphere. Their combustion is not arrested by coming in contact with the relatively cold surface of the boiler containing water. The temperature of a boiler furnace is about 2,000° Fah., while that of steam and water at 70 pounds pressure is but 316°.

Fig. 2

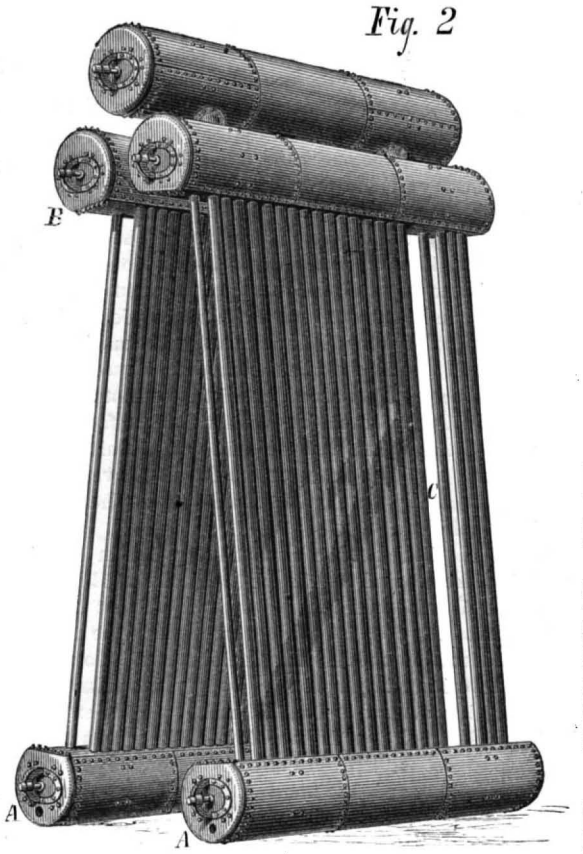


Fig. 2.—THE FIRMENICH SAFETY STEAM BOILER.

Through the room afforded combustion is effected before the gases reach the water surfaces. This the makers believe to be the very best arrangement for absorbing heat rapidly and properly, allowing perfect circulation of both steam and water, and never requiring cleaning from soot or ashes; the soot being actually consumed, and the ashes falling back on and through the grate into the ash pit. A large number of boilers of this description have been in use, we are informed, for years, and are never cleaned, making steam as well as on the day when first put up.

Although the Centennial test was made with anthracite coal, these boilers are especially designed for burning soft slack coal, as economy consists also in using cheap coal, a point of some importance when one costs 50 per cent more than the other.

For further information address the manufacturers, J. G. & F. Firmenich, 13 Mortimer street, Buffalo, N. Y.

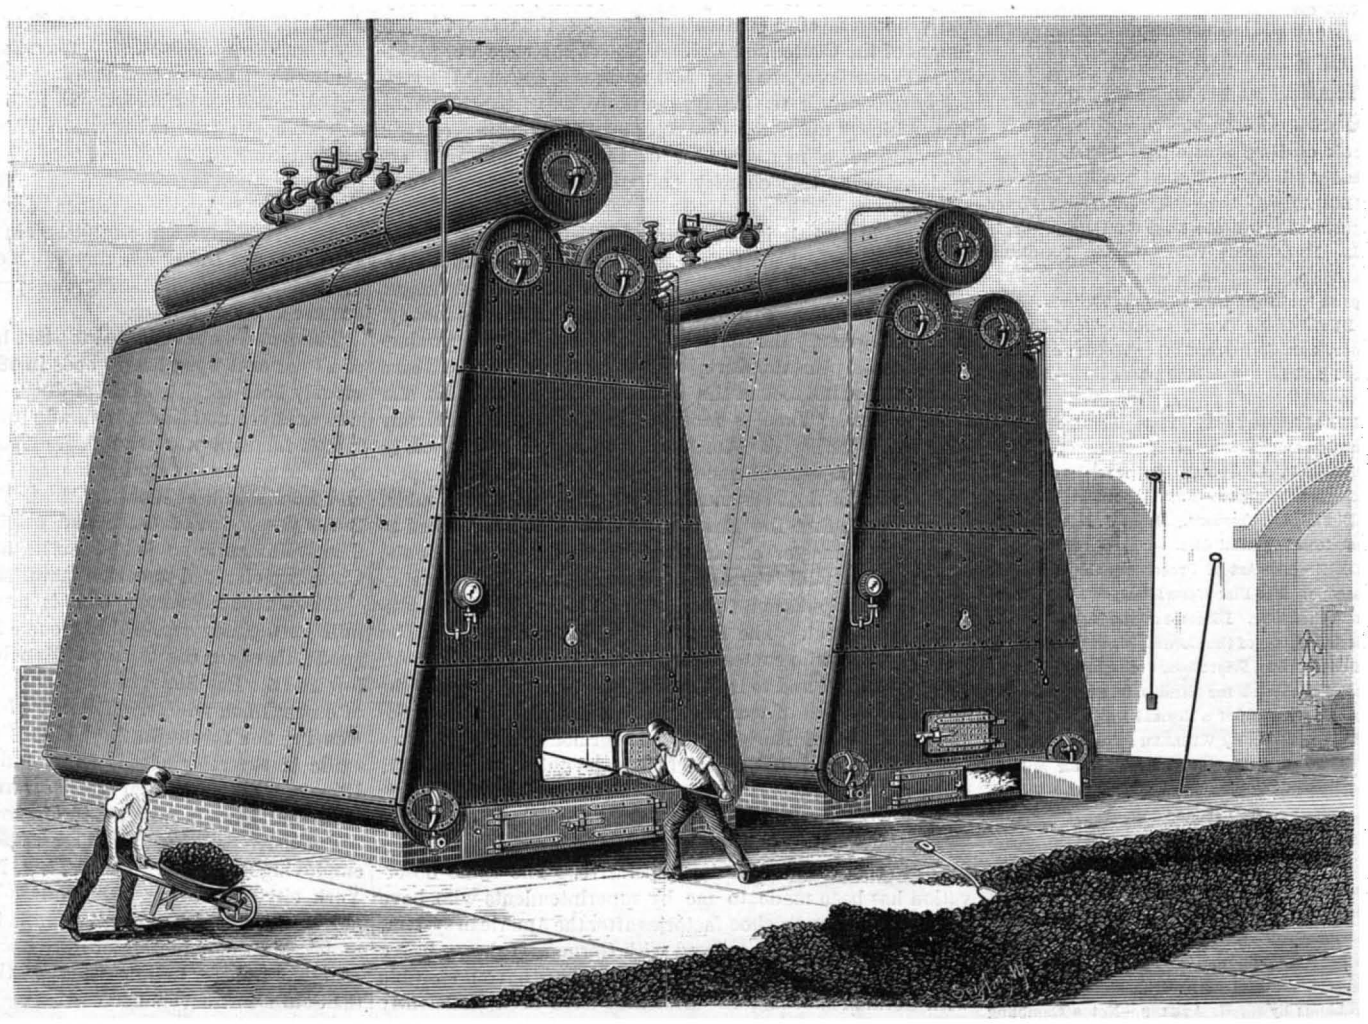

Fig. 1.—THE FIRMENICH SAFETY STEAM BOILER.

## Turpentine as an External Application in Small-pox.

Dr. Farr, in a communication to the *Lancet*, states it as his opinion that body disinfection in the treatment of infectious fevers is not nearly so strictly observed by medical men as its importance demands, and calls attention to the great prophylactic value of rectified spirits of turpentine as an external application in small-pox. He states that it at once relieves any smarting or irritation, effectually corrects the unpleasant odor given off in the more confluent form of the disease, and seems in a marked degree to arrest pustulation, and so modifies to a great extent, and in some instances prevents entirely, pitting. Its powerful antiseptic and disinfectant properties, too, are indisputable; and in this it possesses an additional advantage in preventing the spread of the infection. He used it with great success in the epidemic of 1871–2; and since then it has been used with most satisfactory results by others. It should be applied every night and morning by means of a feather, in the proportion of one part of the turpentine to four of olive oil. Dr. Farr believes that if this plan of antiseptic inunction were carried out in all cases, the mortality from that loathsome and dreaded disease, small-pox, would be considerably reduced, and its ravages proportionately checked.

## The Virginia Gold Mines.

Mr. J. E. Emerson, a valued correspondent of this journal, who has recently visited the Spottsylvania (Va.) gold mines, sends us a communication calling attention to the necessity of some improved process for saving the fine gold which is covered or incased with iron. As in this condition it cannot be amalgamated it goes to waste and only the coarse gold is saved. Mr. Emerson says he was at an abandoned quartz mill where thousands of tons of quartz tailings remain, and by washing down a sample of this, heating it, treating with sulphuric acid, amalgamating the residue, he obtained a fine specimen of amalgam gold. The miners are now sluicing off the surface in California style and are taking sufficient gold to pay. One lump of pure metal weighing 100 pennyweights was recently found.

A narrow gauge railroad runs within three miles of where the principal mines are now being worked about 20 miles in a westerly direction from Fredericksburg. The gold belt is the continuation of the North Carolina one, and covers a vast region of country. It also contains other valuable minerals, consisting of beds of iron ore and copper, lead, and other sulphurets in superabundance.

© 1878 SCIENTIFIC AMERICAN, INC

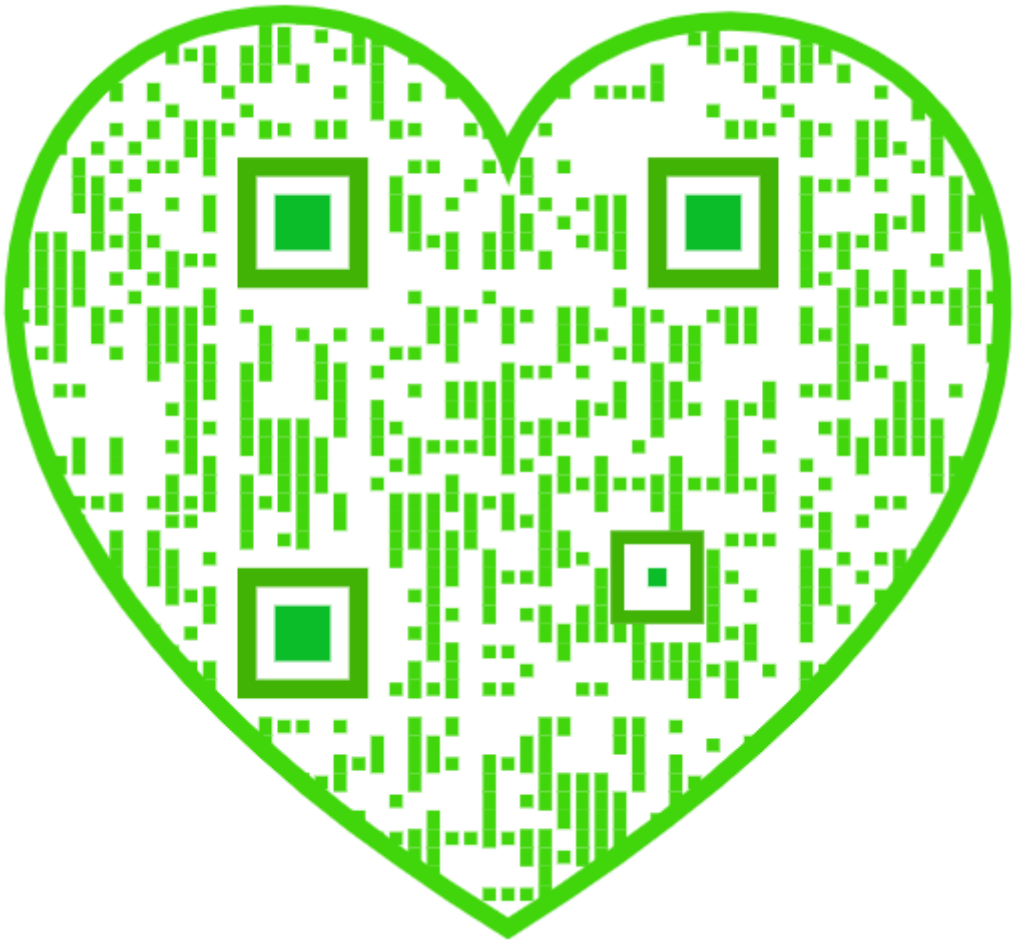

# Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT
NO. 37 PARK ROW, NEW YORK.

O. D. MUNN. A. E. BEACH.

**TERMS FOR THE SCIENTIFIC AMERICAN.**

One copy, one year, postage included..... **$3 20**
One copy, six months, postage included ..... **1 60**

**Clubs.**—One extra copy of THE SCIENTIFIC AMERICAN will be supplied gratis for every club of five subscribers at $3.20 each; additional copies at same proportionate rate. Postage prepaid.

☞Single copies of any desired number of the SUPPLEMENT sent to one address on receipt of 10 cents.

Remit by postal order. Address
MUNN & CO., 37 Park Row, New York.

**The Scientific American Supplement**

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly; every number contains 16 octavo pages, with handsome cover, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, postage paid, to subscribers. Single copies 10 cents. Sold by all news dealers throughout the country.

**Combined Rates.**—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, postage free, on receipt of *seven dollars*. Both papers to one address or different addresses, as desired.

The safest way to remit is by draft, postal order, or registered letter. Address MUNN & CO., 37 Park Row, N. Y.

**Scientific American Export Edition.**

The SCIENTIFIC AMERICAN Export Edition is a large and splendid periodical, issued once a month. Each number contains about one hundred large quarto pages, profusely illustrated, embracing: (1.) Most of the plates and pages of the four preceding weekly issues of the SCIENTIFIC AMERICAN, with its splendid engravings and valuable information; (2.) Commercial, trade, and manufacturing announcements of leading houses. Terms for Export Edition, $5.00 a year, sent prepaid to any part of the world. Single copies 50 cents. ☞ Manufacturers and others who desire to secure foreign trade, may have large and handsomely displayed announcements published in this edition at a very moderate cost.

The SCIENTIFIC AMERICAN Export Edition has a large guaranteed circulation in all commercial places throughout the world. Address MUNN & CO., 37 Park Row, New York.

VOL. XXXVIII., No. 26. [NEW SERIES.] *Thirty-third Year.*

NEW YORK, SATURDAY, JUNE 29, 1878.


**Contents.**

(Illustrated articles are marked with an asterisk.)


Alabama corundum..... 405
American trade with France..... 406
Anthracite in Switzerland..... 403
Antiquity of civilization..... 404
Astronomical notes..... 402
Atmospheric absorption..... 409
Boiler, the Firmenich safety*..... 399
Book notices..... 410
Business and personal..... 410
Coal oil, testing [9]..... 410
Correspondence..... 404
Cotton..... 404
Don't swallow cherry pits..... 407
File sharpening by sand blast*..... 406
Fire telegraphs in Germany*..... 402, 403
Flying machine, new..... 405
Fulminating gold [8]..... 410
Furnace, a simple..... 404
Gang plow*..... 409
Gear dressing machine*..... 403
Hat, improved yielding*..... 407
Honor to American science..... 404
Ice, temperature of [13]..... 410
Index..... 411, 412
Industrial paradox..... 401
Inventions, agricultural..... 406
Inventions, mechanical..... 403, 404
Inventions, new..... 408
Iron industry, our..... 404
Keely seance..... 401
Labor in England and Ireland..... 403
Lead poisoning, new source..... 403
Lightning rods and connections..... 402
Log drive, great..... 405
Microphone..... 404
Mind, muscle, and machinery..... 400
Minerals..... 410
Mining, risky..... 404
Needle and thread-cutter*..... 404
Neglected industry, a..... 400, 401
Notes and queries..... 410
Official prejudice..... 407
Palm, the doum*..... 405
Paris exhibition notes..... 405
Patent decisions..... 407
Phonograph, the musical..... 405
Poisonous leguminous plants..... 409
Railway mileage..... 405
Saccharometer, the Laurent*..... 408
Shad in Lake Ontario..... 403
Shears for marking stock*..... 406
Shield-fern as a tæniacide..... 409
Solar heat, strength of..... 404
Steel works, Tennessee..... 401
Strawberries, a scientist raises..... 402
Street car, a royal..... 409
Telephone diaphragm, new..... 406
Telephone in place of stethoscope 407
Telephone improvements..... 409
Turpentine and small-pox..... 399
Virginia gold mines..... 399
Wheat crop, the coming..... 409
Winans, Thos., obituary..... 405


TABLE OF CONTENTS OF
**THE SCIENTIFIC AMERICAN SUPPLEMENT**
**No. 130,**
**For the Week ending June 29, 1878.**

Price 10 cents. To be had at this office and of all newsdealers.


I. ENGINEERING AND MECHANICS.—Improved Forty Horse Power Horizontal Engine, 4 figures.—Heat in the Deep Gold Mines.—Engineers' Club, Philadelphia. Philadelphia Water Works. Petroleum Pipe Lines.

Floats for Docking Ships and raising Sunken Vessels, 7 figures.

II. ARCHITECTURE AND BUILDING.—Floors. Carpets, Wood-Carpeting, etc. How to lay a Floor. Oak, Cherry, and other Woods; cost, etc.

III. TECHNOLOGY.—A Reed and How it is Made, 3 figures.—A Novel Brick Kiln.

IV. CHEMISTRY AND METALLURGY.—Tin Plate Manufacture.—A New Method for the separation and subsequent Treatment of Precipitates in Chemical Analysis. By F. A. GOOCH. Paper read before the American Academy of Sciences, 5 figures.—New Apparatus for Fractional Distillation under Diminished Pressure. By E. J. BEVAN, 1 figure.—Fermentation.—American Essential Oils.

V. MEDICINE AND HYGIENE.—The Art of Preserving the Eyesight. No. III. The Ophthalmoscope. The Fixed, the Hand, and the Achromatic Ophthalmoscope, and their Use. Diseases of the Eye and their Remedies. Iritis, Trichiasis, Albugo of the Cornea, Muscæ Volitantes, Pterigion, Staphyloma of the Cornea, Sclerotitis, Cone-shaped Cornea, Onyx, Perforated Cornea, Louchettes for Strabisme, Spectacles for Mydriasis, and Cross Eye. The Retina of a Normal Eye. Retina of a Diseased Eye. 20 figures.—Koumiss. By WILLIAM PEPPER. Its Preparation and Remedial Value. Substitution of Koumiss for Milk in Nutrition. Koumiss a Remedy for Diabetes Mellitus. Its Use in Polyuria, etc.—Opium vs. Coffee.—Some Recent Additions to the Botanical Materia Medica.—The Physiological and Therapeutical Properties of Glycerin. By M. A. CATILLON.—Lines on the Surface of the Nails. Hemiplegia from Cerebral Hemorrhage. Clinical Lecture by Prof. AUSTIN FLINT, SR., Bellevue Hospital, New York.—Pill Coating. By EDWARD S. BULL. Gelatine Solution, Varnishing, Chalk, Sugar, and Gold and Silver Leaf Coating. Collodion.

VI. CHESS RECORD.—Biographical Sketch of W. Grimshaw, of England. With Portrait.—Two Problems by W. H. ATKINS.—Not a Gambling Game.—Letter Problem.—The Onondaga Problem Tournament.—Solutions to Problems.


## MIND, MUSCLE, AND MACHINERY.

Speaking of the influence of machinery upon the artisan, an intelligent professional man said to us the other day: "It stands to reason that a man who operates a machine for polishing boot heels, for instance, must by the very nature of his occupation be less intelligent than the man who sits at the bench and makes a whole shoe."

Our friend merely expressed in a pointed way what many feel, namely, that the more nearly automatic machinery is, the greater its effect in subordinating the man to the machine; the more it tends to depress the value of mind and manual skill, and so lower the intellectual grade of the operator.

Where so many elements enter the problem—elements whose value and bearing it is difficult if not impossible to estimate—it is no easy matter to pick out one, and say positively how much of a man's industrial condition and mental character is due to it. Indeed, it is quite useless to attempt the solution of such a problem as this by the study of individual cases. Only by considering the relative conditions of masses of men is it possible to arrive at any just conclusion as to the influence of a factor like machinery upon the intellectual condition of those who use it.

Machinery can affect the artisan class in two ways—by its selective action, and by its direct influence upon those who use it. In other words, machinery may alter the average intellectual grade of the men required to do a given work, by demanding on the one hand a higher average grade, or on the other by allowing the work to be done by less capable men; and it may less directly affect the membership of a trade either by dulling the intelligence of the operative, or by schooling him to greater alertness and thoughtfulness.

There is one phase of this question which may be touched in passing, and that is the vastly increased demand for the highest grades of skilled labor in making the machinery used in our shops, and in making the machines used in making that machinery. Trustworthy statistics are not to be had in this connection; yet we are confident that the facts will bear us out in the assertion that the skilled machinists and tool makers now employed in the occupations we have mentioned, outnumber many times the skilled men displaced by labor saving machinery.

While the introduction of machinery has in no wise diminished the demand for the higher grades of skilled labor, but has rather increased it, we must admit that it has likewise opened the door for a large increase in the number of low grade men in mechanical employments. To meet this demand we have imported men largely from Europe, from the French provinces of Canada, and to a small extent from China. The wisdom or folly of these importations we do not propose to discuss here. In any case machinery is not to be blamed, so long as it has not diminished high grade employment for men of native birth.

We now come to the main point at issue: Does the using of machinery dull the intellect? Does the machine user lose his manliness in proportion to the perfection of the machine, allow his skill of hand and acuteness of sense to die away, and, becoming, as it were, a part of a machine, sink to the level of brute matter? We have heard this charge laid at the door of machinery time and again by people by no means unintelligent. It is one of the current fallacies of the labor question.

We doubt if there was ever a keener or more intelligent body of critics ever set to judge the results, and indirectly the processes, of a nation's industries than the foreign judges of the Centennial Exhibition. They were not prejudiced in our favor, and they had no axes to grind. We may safely quote their testimony, therefore, as to the influence of machinery upon the character of our working classes. One of them, a manufacturer of the first rank, well acquainted with this country and our industries, writes as follows:

"Machinery hall is the mirror of the processes and of fabrication both of the United States and of the Old World. But this mirror presents to the European a painful image. He learns too late the truth of the maxim that time is money, and consequently the importance of machinery in production. Scarcely has the European who goes to America to earn his bread put his foot in the country when already his star cries to him, 'Time is money;' for he sees immediately with what facility the American works, and how much in this respect he himself remains behind. The American produces twice or thrice as much as he, and with less trouble. The reason is that the European works as he has learned to do, that the master continually teaches his apprentice the same routine, while the American seeks unceasingly to simplify the manipulation, to invent, and to apply every possible improvement. The first thing which must be done by the European who comes to work in America is to break off the old routine, and to seek, while practicing himself in the American system of work, to acquire that which neither the good schools of Europe nor his former experience have taught him," and that, in brief, is to be quick, wide awake, and exact in his work. Further on the same observer says:

"My workmen also work with American machines. They have the same tools, but their productive capacity is far inferior to that of the American operative. The same observation has been made to me by superintendents who have established German shoe factories after the American system, and who often cannot succeed with German workmen." We may note here that American manufacturers have no trouble with German shoemakers—after they have been sufficiently educated by the use of machinery.

Again we read: "I am satisfied from my knowledge that no people has made, in so short a time, so many useful inventions as the Americans; and if to-day machinery apparently does all the work, it by no means reduces the workman to a machine. He uses it as a machine, it is true, but he is always thinking about some improvement to introduce into it, and often his thoughts lead to fine inventions or useful improvements." The chief reason for the tendency of the American workman's mind to run in the direction of invention is very properly found in the inducements held out by a liberal patent law.

A manufacturer of even wider experience, in France as well as in Switzerland, observes that "the use of new and admirable automatic machinery has revolutionized every kind of manufacture, by dispensing more and more with hand labor; but we must not forget that to manage these machines, to adjust them, to get out of them all that can be got, requires workmen better and better taught, careful, experienced, and steady." Subsequently, after referring to the Swiss commissioner's report with regard to the superior intelligence and productive power of American machine users, the writer goes on to say:

"We have constantly made the same observation in our own machine shops. Whenever we compare the work of two mechanics of unequal skill, both using automatic mechanism or performing the same work by hand, we always find the relative excess of production of the more skillful workman over that of the other much greater in the first case than in the second. Manual labor when it is irksome and monotonous dulls the mind. But when a workman who possesses the spirit of order, some training, and the elementary principles of geometry and mechanics, has charge of an automatic machine his mind cannot be at rest. When his machine is in operation, he profits by his leisure to examine the work which it has performed. He detects and remedies the causes which make it irregular; he keeps the detached parts of the machine in order, and the whole well regulated. Thus he avoids waste and interruptions." And in doing all this he necessarily raises himself in the scale of intelligence.

One line of testimony of this sort is worth any amount of guesswork from those who lack practical experience with men and machinery, no matter how learned they may be in other directions. No machine can put brains into a mechanic's skull. The most perfect piece of automatic mechanism cannot educate a natural born fool. But if a man has any brains, if he has any desire to improve himself, the management of a machine, even for polishing boot heels, will leave his mind as open to thought, as free to improve itself, as the best equipped cobbler's bench in the world. One great obstacle to the introduction of improved machinery has always been the circumstance that the average workman has seldom been intelligent enough to use such machinery at once to advantage. How much has the sewing machine done to give an idea of mechanics to our women! To be a successful farmer now, one has almost to take a course in practical mechanics, in order to be able to handle his machinery properly. So it is more or less largely in every department of labor. Machinery has compelled the better education not only of mechanics, but of everybody.

## A NEGLECTED INDUSTRY.

A new field awaiting the employment of an immense amount of labor, capital, and inventive talent now exists ready at hand in the neglected flax and linen industry of America. Forty years ago nearly every farmer in the country knew how to raise and prepare flax for domestic use, and many of our fathers and mothers were to some extent engaged in this manufacture. In 1845–55 several manufactories were put into existence in New England to make the various kinds of fine linen goods. Among these were the Stevens mills at Webster, Mass., the Willimantic, in Connecticut, and the American Linen Company, of Fall River, Mass. The latter was established in 1852 with a capital of $500,000, and had at one time 250 looms running upon sheeting, table linen, and coating and pantalooning, besides the coarser kinds of fabrics.

These mills were enabled to start by the placing of a duty of 25 per cent upon linen goods in 1842, while they had previously been admitted free of duty. But in 1857 the duty was removed and linen again admitted free of duty, and the infant industry was strangled. Nothing of the old industry now remains excepting the Stevens mills, making crash and huckaback, at Webster, Mass. These mills are no longer in the possession of those who originally established them. The Willimantic no longer exists, and the American Linen Company changed to cotton manufacture long ago.

Besides the Stevens, which is much the most extensive mill in the country, making some fifteen kinds of coarse goods, there are the Stark, at Manchester, N. H., the Ludlow and the Bay State, in Massachusetts, all small producers of coarse linen fabrics. These, we believe, are the only mills weaving flax fabrics in the United States. Tow bagging is made in several places in Ohio, Indiana, Louisville, and in Illinois, while the initial steps toward the establishment of a linen mill have been taken in Oregon.

Extensive flax thread mills exist, one at Paterson, N. J., employing 500 hands; one at Troy, N. Y.; and one in New York city, employing 600 hands. Up to 1872 there were nearly a hundred flax bagging mills in the central Western States, but the reduction of duty upon jute caused an almost complete transfer to jute bagging, the material with which the South now covers her cotton.

This is the condition of the linen industry in the United States at this time. Of the raw flax used by the crash and

© 1878 SCIENTIFIC AMERICAN, INC

thread mills, 4,000 tons are imported and 1,000 tons are home grown, chiefly from the northeastern portion of the State of New York. A considerable portion of the imported is Russian, a part, that of the best, is Belgian, a part Canadian, and some Irish. The use of American flax is for the most part to adulterate the better imported kinds, and thus lessen the cost of the product. There is a general complaint that the American fiber is less skillfully cared for, and carelessly cured and prepared, and certainly its value, 9 cents a pound, indicates that either too little attention is given to the growth of the flax or to the preparation of the fiber. The imported flax fiber, simply separated from the coarse stalk and with the tow still in it, and not of a fine quality, has a value of 12 and 15 cents per pound in Belgian and Russian ports. Upon this there is still an additional cost of 30 per cent duty, besides cost of transportation, making the cost of a good quality of Belgian flax at this port nearly 20 cents a pound. But little of this is used, and that to give a better finish, a longer and stronger fiber to thread, but is largely adulterated with the cheaper Canadian, Russian, and American. The crash mills would use the American fiber altogether if its character could be depended upon; but from its careless manipulation and want of attention to growing and dressing it is of less value and more difficult to use.

What is required at this time is that our farmers attend to the requirements of fertilizers and the rotation of crops necessary to grow the fiber to perfection, and then sow the proper amount of seed, 2 to 3 bushels per acre, pull it before it is over-ripe, steep it, and spread it just long enough to separate the fiber completely, and the present demand for flax may be easily supplied at home.

This is the first step, and if it cannot be secured without the assistance of a flax association, such should be organized. The importation of raw flax is about 4,000 tons annually, at a cost of about $1,250,000, the importation of linseed about $6,000,000 annually, and of linen goods about $15,000,000 annually.

The value of the flax industry to Russia is above $100,000,000 annually, the exports of linen goods by England is upwards of $50,000,000 annually, while the number of looms in Great Britain in 1870 was 39,738, and in 1875, 51,601, having increased tenfold since 1850.

The establishment of a linen industry in America is not a work of a day, but the fact that the country has every requisite of the world for its successful establishment should incite our people to make the necessary effort. Much inventive skill would of necessity be called into action to supply labor-saving appliances, and considerable capital, labor, and patience would be required to obtain success. The government should be willing to accord it the same assistance, by way of a duty upon imported goods, which it afforded the silk industry, and with that there need be no risk of ultimate success.

## A KEELY SEANCE.

Forty gentlemen, representing, as we are informed, a million dollars' worth of the stock of the Keely Motor Company, recently gathered at the Fifth Avenue Hotel, in this city, for the purpose of hearing a statement from Mr. Keely "as to the present condition and future prospects of the company." The proceedings began with a report from the board of directors to the effect that they were "convinced of the entire integrity of Mr. Keely, and ultimate success of the new motive power," but that the affairs of the concern were now at a standstill, owing to the funds having been exhausted eighteen months ago. The directors had personally contributed $9,000, and now called upon the stockholders to put in about $4,000 more, which, according to Mr. Keely, was all that was required to "carry the enterprise to a point of patenting and render it able financially to take care of itself." This address was not enthusiastically received.

Mr. Keely then remarked that after an elaborate research of two years he was now able to prove the practicability of his system. The difficulty had been in getting apparatus which would produce vibratory inductions. The system being now changed, all that was necessary was to intensify to get the vibratory inductions to produce power. Still it was an infinite success. It necessitated (*sic*) to carry undulatory action to intensify the undulative process to intensify the undulative force. He had demonstrated by rotating machine the action of vapor under vibratory rotation. Success had been encountered at every point. All that is needed now is a tube that will stand 25,000 pounds pressure. The volume of half a pint of water is more at vibratory induction than a gallon at undulatory process. The peculiar feature of the new machine is inducing operation without connecting the vibrating medium. The success had been triumphant. The motor is not microphonic or acoustic, and hence his investigations differed from those of "Mr. Ediphone," who did not work by globular transmission. Keely produced evolution by vibratory induction. The machine was strong enough for undulatory process for single reaction free of compound reaction, which is disadvantageous. By September 1st he would show the stockholders the "luminosity of the ether," and it followed that the moment scientists saw that they would be convinced. A pressure of 28,800 pounds had been maintained, and the motor was a great success.

Mr. Keely's remarks in this strain—and the sentences above given are quoted *verbatim*—continued for some twenty minutes. Although, as is obvious, they were nonsense, unalloyed by even the semblance of sense or logical connection, they were listened to with profound gravity, though toward the end a puzzled expression was generally apparent on the faces of the assembly.

The Secretary, Mr. C. H. Schuellermann, then began a series of appeals for funds. He said that if the $4,000 necessary was not subscribed the 124 shares of stock in the treasury, or else territory, would have to be sold. One half of the New England States, valued at $450,000, had only elicited a bid of $1,500. The motor was a grand success, and there was no doubt but that a 150 horse power machine would be going by September 1. He vigorously remonstrated against funds being raised by contributions of stock for resale. "Stock isn't money," he remarked. Finally he reached the true inwardness of the meeting by announcing that Mr. Keely's salary for nine months, $1,800, had not been paid; nor had the Secretary's—a like sum. This rather disheartened the stockholders, as it was not clear, if $3,600 were taken from the prospective $4,000 to pay Keely and the Secretary, how such expensive undulatory processes and vibratory inductions could be got for the remaining $400. There being a general repugnance to a subscription list, the stock contribution was finally agreed to, and the price of shares fixed at $20 each; but when we departed no eagerness was manifested to contribute stock, and there seemed to be a widespread aversion to buying any.

The Keely stockholders, so far from being ignorant or uneducated, are an apparently intelligent body of gentlemen, all belonging to the upper walks of life, and probably are as good a representative body of the business men of this city as could be collected. It is, therefore, all the more surprising that individuals of this stamp should be so lacking, not merely in special scientific knowledge, but in ordinary acumen, as to become the dupes of Keely. Yet they have undoubted faith in the deception as a business venture, and have invested large sums of money upon the chance of its ultimate success. Their reluctance to come forward in answer to the Secretary's appeals for them to "protect their property" with more cash, seems due to a dawning impression, not of the infeasibility of the scheme, but of the fact that it involves very much more disbursements than accords with Keely's previous glowing predictions.

## AN INDUSTRIAL PARADOX.

Common sense is a capital guide—when it is properly educated; otherwise it is the basis of all delusions. The uninstructed common sense of mankind invariably avers that the world is flat; but, the Rev. Jasper to the contrary notwithstanding, we know that it isn't. The common sense of the working class, by no means the least intelligent part of the community, has invariably objected to the introduction of labor-doing machinery. To them the case is plain. If ten men are doing a certain kind of productive labor, and some one invents a machine wherewith one man can do as much as the ten have been doing, nine men must lose their job. Henceforth for them Othello's occupation's gone. That is common sense. But fortunately it is not common experience. Here comes in the industrial paradox: So far from the nine men going without work, the probability is rather that they will have more work to do, at higher wages, and ten other men will be called in to help them. That is the way labor-saving inventions usually work.

The common sense of English spinners told them that Arkwright's jenny would ruin their business; so they smashed it. The weavers did the same by Cartwright's loom. Yet these two inventions doubled the number not merely of English spinners and weavers, but the number of working Englishmen of all trades. The wealth of England as to a principal part of its trade and commerce is mainly their doing. The early commercial and industrial prosperity of our own country was very largely based upon cotton; but where would our cotton crop have been without Whitney's gin to clean it and Lowell's loom to weave it? The demand for American cotton was as nothing without the one, and could not be met without the other. By their great saving of labor they gave occupation to thousands, and cheapened the apparel of millions.

Quite as marked has been the influence of labor-saving machinery in the production of breadstuffs. But in estimating that influence it will not do to calculate how many men it would have taken to sow by hand and reap with a sickle the two thousand million bushels of grain we raised last year, and then say that the excess over the number of farm hands employed were so many men shut out from work by machinery. It is to labor-doing machinery that we owe the possibility of any crop at all in the larger part of the great grain producing regions of the interior. Without machinery to plow and sow and reap and carry the product to market, the inducement to open up the Western wilderness would have been as slight as the possibility of its execution. The West owes every thing to machinery. In our great grain-producing States, in spite of—more correctly, in consequence of—the rapid introduction and improvement of agricultural machinery, the farmers and farm hands increased in number more than 50 per cent during the ten years ending 1860; and about 30 per cent during the next ten, notwithstanding the losses incident to war. This was 13 per cent more than their share of the gain of the entire population. Yet there never was a time when labor-saving machines were introduced more rapidly or in larger numbers.

But it may be said that this is not a fair illustration; a vast multitude of new farms were brought under cultivation during those twenty years, and these made the increase of farm hands possible. True, but the same effect was produced, in even greater ratio, in purely mechanical industries, where the displacement of manual labor was still greater. During the same years the increase in the number of hands employed in manufactories of all kinds more than doubled. Yet those were years of wonderful progress in the invention and improvement of machinery.

Again, it is objected that those were flush times, times of undue expansion in all directions, times of over-stimulation and over-production, and that we are suffering the consequences now. To a large extent true; but machinery was not to blame for that. If it were, manufacturing countries would be the worst sufferers now, which is not the case. Nor is it true that employments into which the largest proportion of labor saving inventions were introduced are now worse off than others. On the contrary, those are the employments best off to-day, the employments which show fewest men out of work. It is chiefly in those lines of manufacture in which new and improved machinery has so improved and cheapened the product as to exclude foreign competition and gain the world for a market, that business is most active to-day. Witness the shoe trade. Within twenty years invention has turned over to machinery not less than 85 per cent of the work, yet that machinery has made occupation for more men than it has displaced. By improving the quality and lessening the cost of shoes, in spite of a large increase in the cost of stock and the doubling of the wages paid to the factory hands, machinery has gained for American shoes a market wide as the world. As a natural consequence many more shops are required to meet the increased demand, more workmen are employed, higher wages are paid, and multitudes are furnished with new employment in tanning the additional leather required, in putting up and transporting the additional product, in making the machinery used, and in collateral branches of productive industry. Thanks to labor saving machinery our leather industries have been raised to the front rank, along with those of iron and cotton and flour; and from having other countries make our shoes the tables have been turned, and our people are employed by the thousand in making shoes for other nations. The same may be said of scores of useful products; and with many others there would be no possibility of their furnishing employment to any of our people were it not for our superior machinery. How, for instance, would it have been possible for us to compete with the hand looms of England and France in the weaving of carpets? Without power looms for this purpose we should have to import all our carpets; with the labor saving inventions of American mechanics, we make our own carpets, and so give employment to thousands of our own citizens. Only by means of inventions, which enable a few of our well paid men to do more and better work than many ill paid foreigners, is it possible for our industries to control our own markets, let alone those of other lands.

We hear it said that machinery subordinates mind and manual skill to brute matter, and so debases the worker; that men are made of less account thereby and wages depressed. Where is the proof? Where will one find the rates of wages higher, the working day shorter, the intelligence of the native working class greater, than here in America, where machinery is most used? And where in America is the artisan better off than in our manufacturing towns? The laboring classes have been distressed by hard times the world over of late years; the American workers, however, least of any; and of these, machine users have suffered far less than manual laborers. Trustworthy statistics could be given to prove the assertion made a moment ago, that the wages paid in shoe factories are now or lately were double what they were before machinery was introduced. For the sake of variety, take a less striking case. In the introduction to the American edition of the Swiss pamphlet "Look Out for Yourselves," the editor says that the books of a New England mill, which has employed from 350 to 450 hands for 45 years in the manufacture of the same grade of standard sheetings, show that the product per hand has more than doubled since 1835, and nearly doubled since 1855. Meantime, while the hours of labor have been lessened, the average daily pay of the operatives has increased since 1855 over 22 per cent for females and 46 per cent for males. This on the basis of even the low prices of January, 1878. Fortunately improvements in machinery have more than kept up with the increase in wages; and the relative cost of making cotton goods here compared with the cost in other countries is so low that we not only supply ourselves but are able to export, and thus secure employment for many that might otherwise have to go idle.

A volume of similar illustrations could be given if needed. The reverse would naturally be expected, but experience shows that instead of lessening the demand for labor, labor-saving machinery so called invariably increases the demand. The effect of machinery in compelling rapid readjustments of labor, and in crowding the incompetent and unimprovable to the wall, thereby intensifying the struggle for place, and the ultimate effect upon the intelligence and versatility of the artisan class, must be left for discussion hereafter.

## Tennessee Steel Works.

The first open hearth steel ever made in the South was turned out June 6th by the Roane Iron and Steel Company of Chattanooga. The cast, an experimental one of six tons product, by the Siemens-Martin process, was a perfect success in quality. Specular ore from near Cartersville, Ga., was used. When in full operation the company expect to produce 150 tons a day.

© 1878 SCIENTIFIC AMERICAN, INC

## ASTRONOMICAL NOTES.

BY BERLIN H. WRIGHT.

PENN YAN, N. Y., Saturday, June 22, 1878.

The following calculations are adapted to the latitude of New York city, and are expressed in true or clock time, being for the date given in the caption when not otherwise stated.

### PLANETS.

| | H.M. | | H.M. |
|---|---|---|---|
| Venus rises | 2 17 mo. | Saturn rises | 0 08 mo. |
| Mars sets | 9 25 eve. | Uranus sets | 10 40 eve. |
| Jupiter rises | 9 43 eve. | Neptune rises | 1 41 mo. |
| Jupiter in meridian | 2 38 mo. | | |

### FIRST MAGNITUDE STARS.

| | H.M. | | H.M. |
|---|---|---|---|
| Alpheratz rises | 10 06 eve. | Regulus sets | 10 41 eve. |
| Algol (var.) rises | 11 46 eve. | Spica in meridian | 7 15 eve. |
| 7 stars (Pleiades) rises | 2 10 mo. | Arcturus in meridian | 8 06 eve. |
| Aldebaran rises | 3 29 mo. | Antares in meridian | 10 17 eve. |
| Capella sets | 9 12 eve. | Vega in meridian | 0 32 mo. |
| Rigel rises | 5 36 mo. | Altair in meridian | 1 44 mo. |
| Betelgeuse sets | 6 10 eve. | Deneb in meridian | 2 36 mo. |
| Sirius sets | 5 37 eve. | Fomalhaut rises | 0 50 mo. |
| Procyon sets | 7 48 eve. | | |

### REMARKS.

Saturn arrives at western quadrature June 24, after which time he will set before midnight, and therefore be an evening star; near the moon June 22, being nearly 7° south. Venus is near the moon June 27, being about 7° south. She is about 10° southwest of the Pleiades, and will soon pass between that cluster and the Hyades.

Mars is in *Cancer*, and with the *Northern* and *Southern Aselli* ($\delta$ and $\gamma$ *Cancri*) forms a neat equilateral triangle, the sides being about 4°. In the center of this triangle the naked eye may discern a rich cluster of stars, mostly of the sixth magnitude, called *Præsepe*. Algol at minima June 26, 4h. 16m. morning, and 29, 1h. 5m. morning.

PENN YAN, N. Y., Saturday June 29, 1878.

### PLANETS.

| | H.M. | | H.M. |
|---|---|---|---|
| Venus rises | 2 12 mo. | Saturn rises | 11 43 eve. |
| Mars sets | 9 12 eve. | Uranus sets | 10 12 eve. |
| Jupiter rises | 9 13 eve. | Neptune rises | 1 14 mo. |
| Jupiter in meridian | 2 02 mo. | | |

### FIRST MAGNITUDE STARS.

| | H.M. | | H.M. |
|---|---|---|---|
| Alpheratz rises | 9 39 eve. | Regulus sets | 10 14 eve. |
| Algol (var.) rises | 11 19 eve. | Spica in meridian | 6 47 eve. |
| 7 stars (Pleiades) rises | 1 42 mo. | Arcturus in meridian | 7 38 eve. |
| Aldebaran rises | 3 02 mo. | Antares in meridian | 9 50 eve. |
| Capella sets | 8 45 eve. | Vega in meridian | 0 04 mo. |
| Rigel rises | 5 08 mo. | Altair in meridian | 1 16 mo. |
| Betelgeuse sets | 5 43 eve. | Deneb in meridian | 2 08 mo. |
| Sirius sets | 5 09 eve. | Fomalhaut rises | 0 23 mo. |
| Procyon sets | 7 20 eve. | | |

### REMARKS.

The earth is farthest from the sun July 2. Mars still illumines the western sky, and is near the moon July 2, being about ½° north. Saturn will soon rise at a more seasonable hour in the evening. His rings may be seen to a better advantage at present than at any other time during the present year, the earth being about 5° above their plane.

Algol will be at minimum brilliancy July 1, 9h. 54m. evening, about one hour before rising; and as the increase in brilliancy occupies 3h. 20m., it will continue to get brighter for about two hours after rising.

## How a Distinguished Scientist Raises Strawberries.

Some of the largest and finest flavored strawberries that we have seen this season were from the garden of our valued contributor, Alfred M. Mayer, South Orange, N. J. In forming new beds he invariably takes runners from new plants. Manures in the early spring. After the berries have formed he cuts off all runners and thins out the central leaves. Result: enlargement of the berry; improvement in flavor.

## Lightning Conductors and Earth Contact.

The importance of a perfect earth contact for lightning conductors is shown by an accident at Nottingham, England, in 1868, which is mentioned by Dr. R. G. Mann, in the *Journal of the Society of Arts*. A copper lightning conductor, four tenths of an inch in diameter, was attached to the weathercock, one hundred and fifty feet from the ground upon the spire of a new church, and was carried in an unbroken line to the ground, and probably at first had a good earth contact; but after the accident an investigation showed that some thief had drawn it out of the ground and carried away all that was more than six inches below the surface.

On October 16, 1868, the church was struck by lightning, the fluid passing quietly until within about six feet of the ground. Had there been a good earth contact, all would have gone well, but at this point it was drawn from the conductor to a gas pipe on the inside of the wall, although separated from it by 4½ feet of solid masonry. The lightning then passed along the pipes to the gas mains and off into moist ground; but on its passage it totally destroyed a short piece of pipe near the gas meter and allowed the gas to escape, which, by the way, caused another accident on the following day, when a lighted lamp was carried into the cellar by the person sent to look up the leak. At the point where the electric fluid passed through the wall from the conductor to the gas pipe, the stone work was splintered into fragments through an area of about a square yard on either face of the wall, while the center of the wall, for a thickness of about a foot, was entirely uninjured.

## FIRE TELEGRAPHS IN GERMANY.

The principle on which good fire telegraphs are based is that of establishing in sufficient numbers, and in easily accessible places, suitable apparatus by which the outbreak of a fire may be communicated by any person to the nearest fire engine and police stations, or to a central station, from where immediate orders are issued. Various methods may be adopted in order to obtain this result; but that which experience shows to be the most satisfactory, and which has best stood the test of time thus far, is the automatic system in use at many towns where a system of fire telegraphs has been established. By means of the automatic apparatus a certain sign may be telegraphed to the central stations indicating the street and district from which the alarm of fire was sent. It is evident that by sufficient distribution of this automatic apparatus over a town the time required for the dispatch of the brigade must be considerably shortened, thus allowing the fire to be attacked when in its infancy.

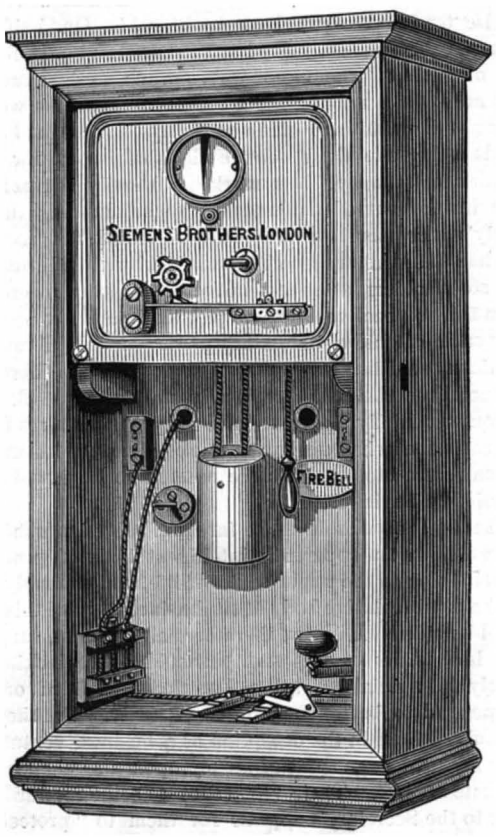


Fig. 1.—AUTOMATIC FIRE ANNUNCIATOR.

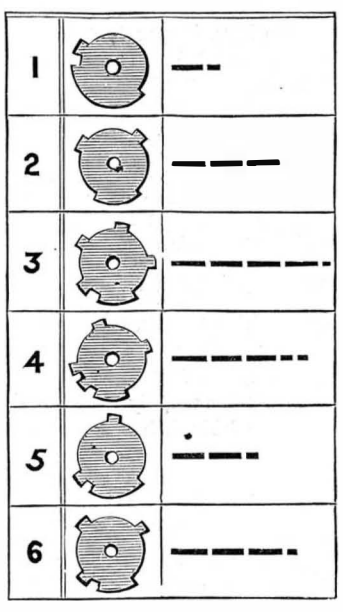


Fig. 2.—CONTACT WHEELS AND SIGNALS.

Mr. R. von Fischer Treunfeld, F.R.S., has recently read before the Society of Telegraph Engineers a valuable paper on this subject, the illustrations of which here given we take from *Iron*. Among other facts he states that in London, although there exists in that city a very efficient fire brigade, but no automatic system of fire telegraph, the proportion of serious fires reaches 10 per cent of the aggregate of all conflagrations; whereas in Berlin, where the fire department is not so well organized, but where an automatic telegraph system does obtain, the proportion is but 2·8 per cent. This difference he attributes to the fire telegraph used in the German cities, an account of which, as located in Hamburg, he gives as follows:

Hamburg possesses two central stations, the central fire brigade station and the central police station. Both stations are connected to seven district lines, which run radially from these centers to the suburbs, each line being connected with a number of fire brigade and police stations, as well as automatic fire annunciators. The chief object of these seven lines, with their annunciators, and fire brigade and police stations, is to send immediate notice to the brigade stations from the locality wherein the fire is first discovered. Besides this, telegraphic communication can be maintained between the different stations (as well as from the annunciators to the central stations), so that the required assistance may be properly disposed of. In this system it will be observed that all fires are first announced to the central station, and that all arrangements for the suppression of every fire are made from this central station, which thus regulates and controls the entire system.

The automatic fire annunciator, Fig. 1, is a very simple mechanical contrivance, introduced into the telegraph line, through which circulates a permanent current from a battery established at the central station. The annunciator, when brought into action, breaks the circuit, and thus sends a certain signal to the central station. The breaking of the circuit is caused by the rotation of a contact wheel, Fig. 2, the periphery of which is so shaped that the contact breaking corresponds to a certain Morse signal, and each signal to a certain district or street of the town. The annunciator is protected by a glass front, and is placed at street corners, in guard or railway stations, or in pillars situated in a prominent position, and where there is little likelihood of its being willfully damaged. On the discovery of a fire all that has to be done is to run to the nearest annunciator box, open or break the protecting glass, and pull the handle. The contact wheel then rotates, and the letter corresponding to the annunciator is transmitted several times in succession to the central fire brigade station, whence orders are telegraphed to the various engine and police stations.

There are, besides the two central stations, forty-seven Morse stations and fifty-three automatic annunciators, that is to say, 102 places from which the outbreak of a fire can be announced by telegraph. Both annunciators and Morse are connected to the same line, the former being situated at prominent places, as previously mentioned, the latter at fire brigade and police stations. The apparatus employed in the stations at Hamburg are Morse ink writers, with the usual complement of details. From the batteries, consisting of 350 Meidinger elements, fifty for each district line, a permanent current flows through the lines, all signals being made by breaking the circuit. The seven radial district lines all unite at the central fire brigade station, to which all fire alarms are first sent, and from which the requisite orders are immediately issued to the stations in the vicinity of the fire. By the different stations being thus connected together every facility is afforded to each station to give its help to the others as circumstances may require.

The telegraph lines are preferably underground, and consist of 151,631 feet of underground cable and 126,641 feet of overground line, the latter in the suburbs of the town only.

The working of the system is as follows: All stations except the central have their Morse instruments cut out, and only a loud sounding alarm in circuit. A signal sent by any of the annunciators or Morse stations is recorded at the central station on a self-starting Morse, attached to that line. The central station, after receiving this signal, sends, by means of a magneto-inductor, the fire alarm to all the stations of the district, or, if need be, to all the stations of the seven districts simultaneously, by means of a commutator fixed for this purpose. The operator at each Morse station, by a slight pressure of his foot on a lever, brings his instrument into circuit, and by this means each station is ready to receive orders from the central station, to which the exact position of the fire has been previously made known. The arrangement is such that when the operator takes up his po-

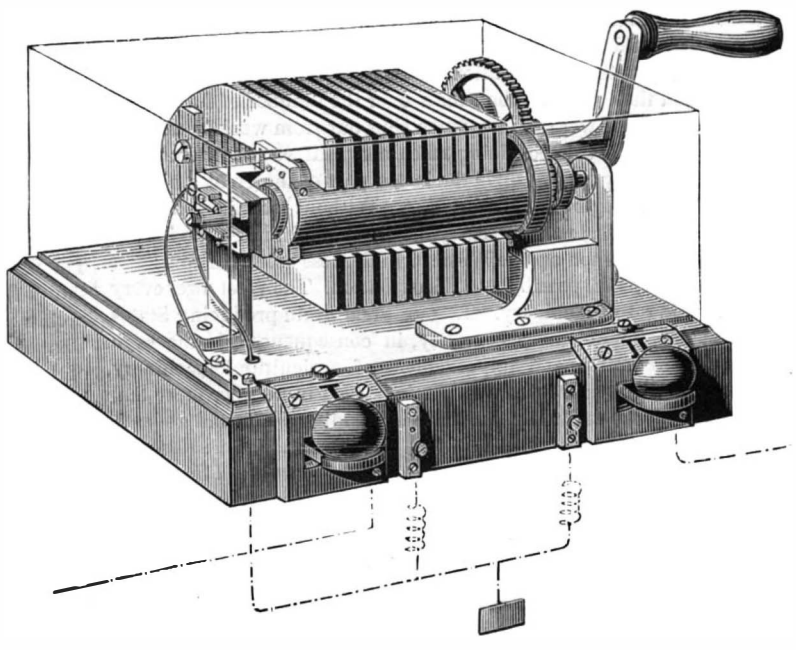

Fig. 3.—INSTRUMENT FOR TRANSMITTING ALARMS.

© 1878 SCIENTIFIC AMERICAN, INC

sition at the table the instrument is brought into circuit by means of the lever contact maker. As soon as he departs from this position the instrument is cut out of circuit. In this way there is no chance of delay or failure from forgetfulness on the part of the operator. The alarm signal is instantly followed by definite orders to the fire brigade and police stations nearest the fire. Having thus shown the arrangements and working of the radial system as in operation at Hamburg, the author explains the circular system of fire telegraphs, taking that in use at Amsterdam as an example.

The town is divided into three main circles (not including the suburban circle), the offices in each of which are in communication with the central station. Only fire brigade and police stations are in these main circles, and they are so connected that the police stations are situated in one half and the fire brigade stations in the other half of the circles. By this arrangement the two may be disconnected from each other, and enabled to communicate independently with their own central office. To each of the three main circuits a number of divisional circuits is attached, having their centers in one of the fire brigade stations. These divisional circles contain, as a rule, only automatic fire annunciators, although, as will be gathered from the diagram, this rule is not altogether absolute. The entire arrangement shows that there are 50 Morse apparatus and 135 annunciators in use. In all there are 159 places from which fire alarms may be given by telegraph. All the lines are worked on the closed-circuit system, the batteries of the Meidinger form being at the central station. The automatic annunciators have, besides the clockwork required for the movement of the contact wheel, a Morse key, a galvanoscope, and a lightning protector. By means of the key messages can be sent to the station of the division if required. The Morse apparatus in the stations is fixed in the same way as in the Hamburg system. In the central station is a magneto-inductor, by which the alarms of all stations may be rung, and, by an agreed combination of bell signals, either all or any single station may be called by the central station. The working of the system is similar to that in use at Hamburg. All stations, except the central, have their Morses "out" and their inductor bells "in." As soon as the central station receives a fire signal the alarm call is given by the magneto-inductor, and each station puts its Morse in circuit in the manner already described, to receive orders from the central station. The latter is provided with a special commutator by which any of the stations may be individually called by bell, or all sections simultaneously called together, and a message dispatched to all at the same time. The magneto-conductor is shown in Fig. 3. This inductor sends a series of alternating currents, giving the fire alarm, which is received on the station bells.

Fig. 4 shows a gong which is in use on the banks of the canals and rivers for the purpose of warning the fire boats moored in the channel; and Fig. 5 shows the detailed electrical arrangement which arrests and frees the spindle acting upon the hammer of the gong.

Fig. 4.—FIRE ALARM GONG.

### Labor in England and Ireland.

The United States Consul at Birmingham reports that trade is very much depressed, partly owing to the diminution of exports to this country and the increase of imports hence. The better classes of mechanics receive about 17 cents an hour, or about $4.25 a week, an increase of 14 per cent over the rates paid five years ago. The increase in the cost of living has been small. The Consul at Londonderry reports that Irish farm laborers are getting about six dollars a month, with board and lodging. Lotters get 8 or 9 shillings a week, and day laborers from one to two shillings a day. A teamster may receive 15 shillings a week; and a factory girl, if steadily employed, as high as 7 shillings a week. Negotiations have been opened with American steamship companies for the return passage of English cotton operatives who have emigrated to this country and now want to get home again.

### Anthracite Needed in Switzerland.

The United States Consul at Geneva reports that American anthracite might easily command the Swiss market. Wood is scarce and costs $18 a cord; coke brought from Lyons sells for $11 a ton; and a very poor oily coal is brought from Saarbrück. The Consul believes that anthracite could be introduced and sold for less than is now paid for inferior fuel, in which case it would be used almost exclusively. The matter is one which deserves attention.

### A New Source of Lead Poisoning.

The occurrence of numerous cases of sickness among children, with symptoms of lead poisoning, has led to a remarkable discovery by the Imperial Health Office of Germany. It appears that the enameled cloth used in covering children's carriages is largely charged with lead, different specimens, of both German and foreign make, showing as high as 45 per cent of the metal. The fabric burned readily, and drops of the reduced metal were seen to fall even when a small piece of the cloth was ignited.

SHAD IN LAKE ONTARIO.—Seth Green's attempt to stock the waters of Lake Ontario with shad promises to be a success. The Ogdensburg *Journal* reports that the Oswegatchie river has lately been full of strange fish which experts pronounce to be genuine shad. They measure from six to seven and half inches in length.

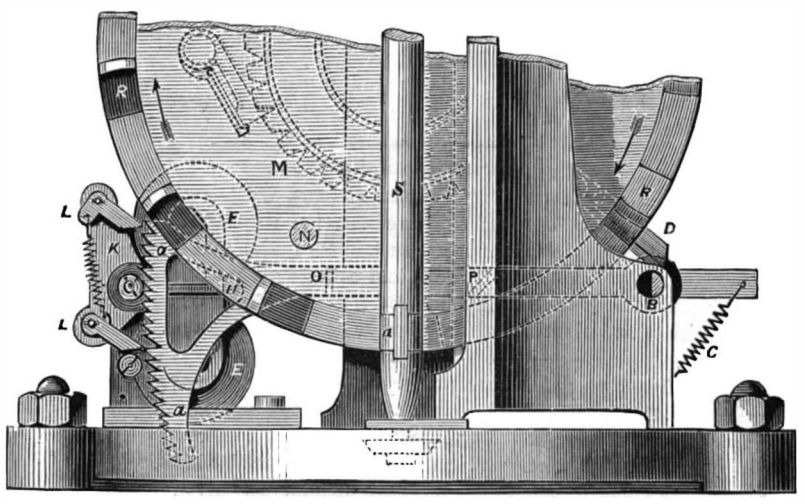

Fig. 5.—MECHANISM OF FIRE GONG.

### New Mechanical Inventions.

A novel Dental Engine, invented by J. M. Stebbins, D.D.S., of New York city, is operated by an electric engine whose motion and power are controlled by a series of resistance coils, any number of which may be placed in the circuit. There are also improvements in the air forcing apparatus and in the mechanism for operating the burrs and pluggers.

Mr. John Collom, of Golden, Col., has invented a new Ore Separator, for which important advantages are claimed. It is of the "wet" type, and separates the ore by agitation over screens, placed just above the water level in a tank, motion being communicated to the water by means of suitable intermittent plungers. The tank is divided into compartments provided with screens of different mesh, so as to treat ores of varying fineness simultaneously.

An improved Former for Making the Truck Sides of freight cars has been patented by Messrs. R. H. Briggs and J. H. Dougherty, of Whistler, Ala. It is an attachment to be applied to the anvil and piston of a steam hammer, which bends the side bars rapidly into the proper shape and at the same time marks them for drilling.

Mr. E. H. Smith, of Keeler, Mich., has contrived a simple and effective Current Wheel, consisting of a horizontal disk carried by a shaft and having on its under surface a number of hinged buckets provided with bracket stops, the buckets on one side dropping down by the action of the current, while those on the other are automatically folded up against the face of the wheel.

Mr. A. Stoner, of Stony Point, La., has invented a Machine for Separating Yucca Fiber, which is designed for treating the blades of the yucca plant in its green state, so as to separate the fibers mechanically from the green glutinous mass, without exposing them to a rotting or wilting process. It has an endless feed apron, a sprinkling device, revolving mashing rollers, and a series of toothed brushing cylinders working in connection with a metallic plate, over which the fibers pass after leaving the roller.

Mr. G. A. C. Meyer, of Hannibal, Mo., has patented an ingenious Automatic Fan, which is attached to a chair, and is operated by mechanism put in motion by the weight of the person in the chair. A regulating escapement neutralizes the difference in the weight of the persons using the chair. The device is applicable to other light work.

Mr. F. W. Wilson, of Manchester, N. H., has invented a convenient Retort Lifter, for facilitating the operation of setting gas retorts in position in the bench. The lifting device is so constructed that it distributes the strain equally over the whole face of the retort in handling it, which, in view of the brittle nature of the material of which such retorts are made, is an important point.

Mr. E. R. Dingley, of New York city, is the inventor of an improved Automatic Cut-off for steam engines, in which a novel arrangement of mechanism, consisting of a secondary valve chest and its connections, is introduced for the purpose of cutting off steam automatically at each stroke of the piston should the motion of the engine become too rapid, until the engine is slowed down to the proper speed.

An improvement in the Sand Blast apparatus for engraving glass has been patented by Mr. John Whittaker, of Greenpoint, N. Y. The object is to provide an expeditious method of applying the stencils. The inventor uses a curved shield, having either fixed or removable stencils, and adapted to the surface of the ware to be engraved, and having spring handles, by which it is clasped to the ware and by which both are held under the sand blast.

In an improved Railway Car, patented by Messrs. R. L. Dabney, of Hampden Sidney, Va., and C. W. Dabney, Jr., of Emory, Va., the inventors apply timbers alongside the car body, near the bottom, and suspend cross-timbers, on which the car body is supported. The car body is thus hung low, and the upper segments of the wheels are inclosed by boxes projecting above the floor of the car interiorly. Provision is also made for passing around curves with little friction, by supporting the car bodies upon balls placed between them and the side bars of the trucks.

Messrs. Joseph Ogden and Joseph Garrett, of Chester, Pa., have secured a patent upon an improvement in Spinning Mules, which consists in constructing a cop building rail with a double incline, or in attaching to said rail a block having a similar angle. With this double incline the faller arm works in frictional contact, so that when the mule carriage runs in the faller will be caused to "dip" suddenly so as to crosswind the yarn, and thus bind the

© 1878 SCIENTIFIC AMERICAN, INC

regular contacted spiral coils or layers of yarn firmly together.

Mr. Floyd Heavener, of Laramie City, Wyoming Ter., has made certain improvements upon the Car Coupling for which letters patent were granted the same inventor August 28, 1877, the design being to secure greater strength and reduce the wear upon the operating parts.

## OUR IRON INDUSTRY.

With no less surprise than interest we note the prominent remedies which in various countries are proposed for restoring the vitality of the iron industry.

While here the two political parties are urging in Congress, the one an increase, and the other a decrease of tariff—each party deriving its opposing arguments and support from the iron manufacturers themselves, the English and French manufacturers are almost unanimous in favor of protective duties, and the government of Belgium has appointed a commission to inquire into the best means of enlarging the field for the consumption of iron, so as to increase the demand for the products of the Belgian works.

Evidently none of these measures would afford more than local and temporary relief; the trouble lies deeper, we think, and is to be reached and remedied only by discovering and adopting new methods and economies in manufacture.

Prominent among the many methods that have been presented to the iron manufacturers in the past ten years are two which with great cost and long experiment have been so far developed that but little apparently remains to be done to perfect them sufficiently for general adoption.

The manufacture of wrought iron directly from the ore—the direct process—and the application of pulverized coal to puddling and heating furnaces, are the two improvements we speak of.

The ideas are old and familiar, but their present improved methods of expression are of recent date, and have had but little publicity, especially among manufacturers on this side of the water.

Though, doubtless, quite as many new points in regard to these processes have been determined here as in England, we are able to obtain from the Reports of the Associations of the English Iron Manufacturers fuller knowledge of the progress made there.

And we would here remark that in these associations, at whose meetings every new process or improvement is fully examined, discussed, and criticised, our English cousins possess great advantages over us. While they act together for their mutual benefit, we act independently of or in opposition to each other, because of jealousies of competitive and sectional interests.

Without dwelling on the worth of Clay, Chênot, and scores of others who have successively added to our knowledge of the manufacture of wrought iron directly from the ore, we come to one of the latest experimenters on the subject—Siemens—who has recently obtained results indicative of a very near approach to a practical and economical solution of the problem through intelligent recognition of the necessity for fine pulverization and ultimate mixtures of the ore and reagents.

In our judgment the failure to recognize the importance of these factors has been the chief cause of the non-success that has accompanied the labors of most experimenters in this direction, for we have long held the opinion that unvarying and satisfactory products and proper economies in time and fuel could in no other way be attained; as only by fine pulverization of the furnace charge can the intimate mixture requisite to prompt and effective chemical reactions be secured.

The only things seemingly now required for the perfection of this process are a furnace of less cost and a manner of firing more simple than that of Siemens, for in the matters of economies in fuel, ore, and reagents, and in character of product, but little remains to be desired.

In the application of pulverized coal to the puddling and heating of iron, Crampton in England, at Woolwich and elsewhere, has achieved fair success by using the Danks revolving furnace; and the most intelligent criticism seems to establish the fact that the method would be completely succ ssful, not only with the revolving but with all other heating and puddling furnaces, were the coal economically reduced to a finer powder.

It would therefore appear that the cost of the revolving furnace and auxiliary machinery, and his imperfect yet expensive method of pulverizing, are the only obstacles which retard the general acceptance of Mr. Crampton's process.

Great progress, too, in these directions has been made with us in the past few years, especially toward the point arrived at by Mr. Crampton, so that, judging from the reports from the United States Armory at Springfield, Mass., where a pulverized fuel process has been in operation for several years, but little if any more experiment is required for its perfection. The furnace and the appliances for comminuting and injecting the coal are reported as simple, inexpensive, and durable, and as leaving but little more to be desired.

These two methods, then, which have been of very gradual growth, would seem to offer the iron manufacturer a way out of existing troubles. The manufacturers of iron *per se* must make cheaper and better iron if they would enlarge the field for its consumption, or even if they would hold their own against the steel manufacturers. They must seek new methods of manufacturing rather than changes in tariffs

## COMBINATION NEEDLE AND THREAD CUTTER.

The annexed engraving represents a handy little arrangement, which every lady who uses a sewing machine will readily appreciate. It consists simply in forming on the shank of the sewing machine needle a knife edge, by which the thread is divided when pressed against it. Scissors are apt to be mislaid and time lost in searching for them, but with this device, so long as the machine is used, the thread

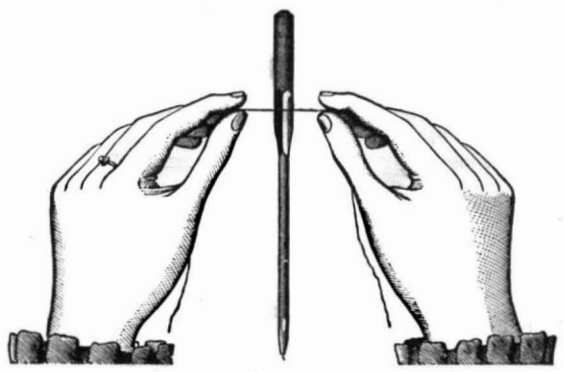

cutter is constantly at hand. The cutter is of the same fine steel, and receives the fine temper of the needle itself, so that it will retain its edge over an indefinite period. For further particulars address the Domestic Needle Works Company, Middleborough, Mass.

## Cotton.

In 1860 the United States took 227,000,000 yards of British cotton goods. In 1877 we took only 61,000,000 yards. In the year first mentioned, Great Britain used half the whole cotton crop of the world; last year she used only 3,017,000 bales, against 8,959,000 bales used elsewhere. English manufacturers explain the relative falling off by the increase of capital elsewhere, and the ability of other nations to cope with them in power of organization; and add that the race will be to the frugal, the industrious, and enduring. They might well have added also the honest; for the credit of English makers has been sadly lowered in the East, and American competition favored, by the excessive adulteration of English goods, aggravated by short measure.

## Risky Mining.

Speaking of the terrible explosion at the Haydock colliery, and the appalling frequency of such disasters in British mines, the *Tribune* remarks that these great slaughters do not prove that the skillful inventions and ingenious systems devised to reduce the danger of coal mining are worthless; they indicate rather that for every step of invention there has been a parallel step in taking greater risk. Mines that could not have been worked at all before are now filled with busy laborers, and the chances for loss of life have been little reduced. The frequency of such accidents is a disgrace to the supervision of mining which the British Government undertakes.

## A SIMPLE FURNACE.

Mr. M. A. Beck, of Waterloo, Iowa, sends us the annexed sketch of a simple little furnace, well suited for brazing, hardening, and tempering small taps, dies, drills, etc. A is an ordinary flower pot, having a number of small holes, D, drilled in the bottom. B is a frame or casing made of sheet metal, and C is a blast pipe, to be connected with a small blower. The plan might be still further cheapened by setting the flower pot bodily into another one of smaller size, the space between the bottoms then forming the chamber into which the blast is conducted, without materially affecting the result.

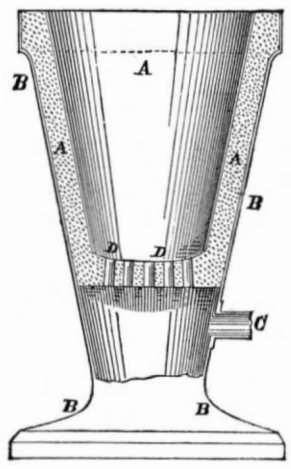


## Strength of Solar Heat.

Sir John Herschel ("Familiar Lectures on Scientific Subjects," page 64) says: "I have seen the thermometer four inches deep in the sand in South Africa rise to 159° Fah., and have cooked a beefsteak and boiled eggs hard by simple exposure to the sun in a box covered with a frame of window glass and placed in another box so covered."

HONOR TO AMERICAN SCIENCE.—The Huyghens medal of the Society of Sciences, at Haarlem, Holland, a medal awarded once in twenty years to the astronomer who has, during that time, contributed most to science by his discoveries and investigations, has been unanimously given to Professor Simon Newcomb, of Washington, the Superintendent of the Nautical Almanac

To prevent the hair falling out, the common application, in Oriental countries, is the bruised bulbs of the *Asphodelus bulbosus*, garlic, or onions, mixed with gunpowder. An infusion of the small leaves of the orange or lemon tree in red wine, containing 20 grains of tannin per liter, has also proved serviceable.

# Communications.

## The Microphone.

*To the Editor of the Scientific American:*

In *Nature* of May 16th is an article upon the above subject, in which it appears Professor Huxley presented to the Royal Society the microphone as an invention of Professor Hughes, of Kentucky. The device used on that occasion was a glass tube about 2 inches long, fitted with pencils of carbon, through which the battery current was transmitted. Professor Huxley on speaking to this was enabled to transmit words to an ordinary Bell telephone. If Professor Huxley had placed ordinary lead shot in the tube, about number 12, he could have received as well as transmitted by pressing the neck of a common glass funnel to the tube and applying the ear to the cone. We have repeatedly received through such an arrangement, and also by a device arranged on the principle of the Trevelyan rocker; that is to say, we have received without a diaphragm or electro-magnet. As to the wonderful discovery accredited to Professor Hughes, we can only say that we see no need whatever of supposing that "we are beginning to tap sources and modes of energy hitherto undreamed of," nor that the discoveries furnish "a new method of attaching and quantifying molecular motions." Nor is Mr. Edison justified in supposing that he has discovered new and important properties in carbon, for all his results, as well as those of Professor Hughes, can be explained by old and well known causes, which are present in all the experiments published. We have been engaged in investigations on this subject in the same direction as Professor Hughes for the past half year. Many of our experiments are identical with his, and give the same general results. While we agree with him as to facts, we cannot, however, accept his conclusions, nor those of Mr. Edison. All our own experiments, as well as those published by Professor Hughes and Mr. Edison, when closely examined, support us in our conclusion that the effects produced must be ascribed to the well known facts of *contact resistance* at the surfaces of contact between the different parts of a non-continuous conductor. This was in fact the point of departure for all our investigations, and all our experiments were especially arranged so as to determine whether or not this cause is sufficient to produce the required effect (transmission of articulate speech). We succeed not only in transmitting articulate speech where nothing but contact resistance could have been the cause, but also in receiving with some of our contact transmitters, as indicated above. We are still engaged in experiments to determine the conditions under which a conductor containing surfaces of contact can act as telephonic receiver. Now, as contact resistance can be proved to be sufficient to produce all the effects obtained by Professor Hughes and Mr. Edison, and as this element is certainly present in all their experiments so far published, the true and simple logic of science compels us to reject their conclusions until they have obtained the same results after having completely eliminated that element from their experiments. At a future day we expect to give to the public a detailed account of the experiments which have led us to our conclusions.

W. H. PITT,
W. H. DOPP.

Central School Laboratory, Buffalo, June 11, 1878.

## The Antiquity of Civilization.—A Query for Professor Newcomb.

*To the Editor of the Scientific American:*

Under the heading "Planetary Population," in your number for June 1st, 1878, page 346, Professor Newcomb is reported as saying, "The latter (the earth) has probably been revolving in its orbit 10,000,000 years; man has probably existed on it less than 10,000 years; civilization less than 4,000 years." As a student of archæology and anthropology, I would like to ask Professor Newcomb, who being a scientist of some eminence in his line is supposed to know what he is talking about, how and where he obtained the data for these most astonishing figures—especially the two latter (although I imagine paleontologists and geologists would be equally anxious concerning the first).

Under these estimates of time what becomes of the discoveries of Lepsius, Mariette, and others in Egypt, where they declare they have unearthed structures, monuments, tombs, statues, etc., dating back 4,500 to 5,000 years before our era? The deciphering of hieroglyphics, which has attained a high degree of certainty, shows us that nearly, if not quite, 7,000 years have passed since the Fourth King of the First Dynasty built the Pyramid of Cochomé, the first that greets the traveler toward the desert on leaving Cairo. Three thousand years before Solomon built his temple to the "most high" God on Mount Moriah, or the Assyrian reared his altars to Baal on the platform of Koujunjik, Egypt was an old country, her architecture grand and imposing in style and perfect in execution, her language not only fully formed, but reduced to writing, her statuary natural, and her paintings vivid in coloring and truthful in design. I have before me on the table a *fac simile* of the hieroglyphs on the "Gliddon Mummy Case," in the National Museum (*Smithsonian Contributions to Knowledge*, No. 208). Egyptologists are agreed that this case and the writings on it date back to a period antecedent to the reign of Sesorthus or Tosorthus, who flourished B.C. 3,240 to 3,211. Who will look at the exquisite drawing and coloring of this ancient piece of work and be willing to admit that the scribe who executed it was not civilized? nay, that he lived 1,000 years before civilization existed upon earth? And this was already in the fifth dynasty

© 1878 SCIENTIFIC AMERICAN, INC

Who will look upon the temples and tombs of Memphis and of Thebes, dating 2,000 years still further back, or 5,000 years before our era, and say that the people who built them were not "civilized?" Even the orthodox Bunsen, upon study of them, abandoned the, till then, implicitly received Mosaic or biblical chronology, and was compelled to relegate the genesis of man back to 20,000 years B.C. ("Aegyptens Stelle," Bd. V., Th. V., pp. 342, 359.) How many thousand years Egypt must have taken to arrive at the stage of civilization in which Mariette, Lepsius, Renan, and Bunsen show her to have been seven thousand years ago, we have no means of knowing.

I would also ask what is to be done with the fossil man of Denyse, of Mentone, of the Neanderthal and other locales; of the remains of man found commingled with those of the cave bear, the woolly rhinoceros, and other extinct mammalia of the diluvium, and so commingled as to leave no room to doubt their cotemporaneousness? What explanation can be made of the discoveries of Wokey Hole, Kent's Cavern, the Cavern of Aurignac, the Trou de Frontal, and the numerous other bone caves of France and Belgium; of all the labors of Schmerling, Sprung, Baer, Vogt, Boucher de Perthes, Lartet, l'abbé Bourgeois, Lyell, and Lubbock?

Were Professor Newcomb less eminent as a man of science, or had his opinions appeared in some journal less prominent as an educator than the SCIENTIFIC AMERICAN, I should hardly take the trouble to call attention to them; but coming whence and through the medium that they do, they are well calculated to do harm by conveying false impressions to the many hundreds of readers who look to your journal solely for accurate information on all scientific topics.

Respectfully,

FRANK L. JAMES, Ph.D., M.D.

Osceola, Ark.

### A New Flying Machine.

The first open air exhibition of Professor C. F. Ritchell's flying machine was conducted at Hartford, Conn., on Wednesday afternoon, June 12. It went up to a height of fully two hundred and fifty feet, past the spire of the Colt Memorial Church, and sailed off until over the Connecticut river, the operator meanwhile exhibiting his power to change its altitude and direction at will. When he ascended there was but little wind blowing, and the machine appeared to be under perfect control; but gradually a breeze sprang up, and it was deemed safest to make a speedy return, as there were indications in the sky of a gathering storm. The machine turned and made its way back in the teeth of the wind until directly over the ball ground whence it had ascended, and then alighted within a few feet of the point from which it had started.

From this demonstration of its capacity it was generally conceived that it could do much more than its modest inventor claimed for it. He never expected it to move against a wind of any strength, and has not had the attainment of that end in view in its construction, as may readily be seen by a glance at its proportions, but he does claim that it can be raised or lowered at will to leave adverse currents and enter favorable ones; that it can be made to tack so as to effect a little headway even against a breeze, and that in a still atmosphere it can be moved about as readily and perfectly at the will of the operator as a boat can be moved upon quiet water. All that, and even a little more, there is abundant evidence of its having done on Wednesday.

The inventor, Mr. Ritchell, is a Maine man, but has during several years past lived at Corry, Pa. The project of constructing a flying machine has been a favorite subject for contemplation with him during nearly ten years past, and for the last seven of that time he and his friend, Mr. W. H. Lyman, of Corry, Pa., have incubated his idea together. In November, 1876, they went to Bridgeport, Conn., to put their plans into execution, as they believed they could there obtain most readily just the peculiar materials they required, and have them put together in the most perfect manner. Their confidence in Yankee resources and skill was not misplaced, but their crude ideas were not immediately crystallized into a perfect machine, nevertheless.

In the first apparatus which they constructed, some parts were too heavy, others too large, and there was an ineffective application of power. Then a second one was built, that now upon exhibition, and though it cannot be said to be so far perfected as to be capable of application to practical service, such as serving a mail route, or even as a popular vehicle for travel, it is still of very great importance as proving the correctness of the theories upon which it was based. Mr. Ritchell took it to the Permanent Exhibition at Philadelphia, May 10, 1877, and so succeeded in effectually concealing it from public knowledge for a long time. Now he has put it into the proper course for either securing its development or making it a worthy pioneer for other inventors in this branch of science.

The flying machine is all clumsiness above, all lightness and grace below. The lifting power is afforded by a horizontally placed cylinder of "gossamer cloth," fine linen coated with India rubber, twenty-five feet in length and thirteen in diameter, weighing only sixty-six pounds, and charged with hydrogen gas, which is made by the usual process from iron turnings and sulphuric acid. Broad worsted bands extend over that and down to a rod of mandrel drawn brass tubing, nickel plated, 1½ inch in diameter and 23 feet long. From that rod the machine is suspended by slender cords. The after portion of the machine is at the base a parallelogram of rods 2 feet wide and 5½ feet long, from which rise, lengthwise, curved rods 18 inches high in the center, and drawn near together at the top. All these rods are in reality hollow tubes of mandrel drawn brass, light and very strong. Above the apex of this form rises a cog edged steel wheel, 11 inches in diameter, with double handles so geared to a four bladed fan moving horizontally directly beneath, that the operator can give the fan 2,000 revolutions per minute. The four blades of the fan are of white holly, each having a superficial area of about 50 square inches, and the extreme diameter of this revolving fan is 24 inches.

The blades are set at a slight angle, like those of a screw of a propeller. Just behind the wheel is a very small seat, upon which the operator perches. His feet rest upon two light treadles above and in front of the fan. From the front of this form spring other rods, carrying at their extremity a vertically working revolving fan, like that beneath the operator's seat, except that it is but 22 inches in diameter. It is so geared to the main or horizontal fan that it may be operated or not, at the pleasure of the driver of the machine, and can be made to turn from one side to the other, so as to deflect the course of the machine in the air. This fan will make 2,800 revolutions per minute when the other is making 2,000. All its movements are controlled by the operator's feet. When he presses the left treadle he throws it into gear, when he presses with the toe of his right foot it turns to the left, and a slight pressure of his heel whirls it over to the right. He can also reverse the action of his main fan, so that when it whirls one way he goes down, and when its course is reversed he mounts in the air.

That this is not merely a claim, has been clearly demonstrated. Then the weight of the operator and machine and the lifting power of the gas cylinder have been so nicely adjusted that they were exactly balanced; six pounds have been added to the weight of the machine, and the working of the horizontal fan has caused the apparatus to rise and continue to ascend as long as the lifting power of the machinery was exerted. The weight, normally, of the machine, and the rod from which it is suspended, is 48 pounds. This, then, gives 114 pounds as the weight of the entire apparatus. The operator, Mark Quinlan, who went up on Wednesday and again yesterday, weighs 96 pounds, and to balance him and the dead weight against the lifting power of the gas, he had to carry along with him about nine pounds of shot and stones.

The second exhibition was given June 13. The weather was far from favorable. The wind came in quite sharp gusts, and there were threatenings of a coming storm. Nevertheless, the ascent was made. Little Quinlan, even if he does only weigh ninety-six pounds, has confidence and nerve enough to go up in a gale. Some time was spent in getting the weight and lifting power so neatly balanced as to show that the machine could exert a lifting power of its own. When this had been effected to Professor Ritchell's satisfaction, the apparatus rested quietly on the grass, but could be lifted or set back with the light pressure of one finger. Then the word was given to "Go." Quinlan began turning the wheel, the horizontal fan revolved with a noise like a buzz saw, and the machine darted up almost vertically to a height of about two hundred feet. There a strong, steady current of wind setting toward the southwest was encountered, and the machine was swept away by it, broadside on to the spectators. Then the operator was seen throwing his vertical fan into gear, and by its aid the aerial ship turned around, pointing its head in whatever direction he chose to give it. All this was the work of but a few seconds. Although Quinlan could move the apparatus about, he could not make any headway against the strong wind. Reversing the motion of his horizontal fan, he descended apparently about one hundred feet, to get out of the current, but, finding that impracticable, reascended to a much greater height than he had first reached. Still he was swept off toward New Haven, and after a little time went out of sight. He had vanished behind a distant hill, and for a while it was supposed he had alighted. Then he was again sighted, far away and not less than one thousand feet above the earth. The cylinder of the machine looked no larger than an orange. At length he disappeared altogether.

At 6¼ o'clock P.M., having been up battling with the wind very nearly an hour, he descended safely at Newington, and at 10 o'clock was back in Hartford. He said that at one time he was eight or ten miles away from his starting point, but by tacking and working between the gusts of wind, won his way back as far as Newington, only five miles from Hartford. He says that the working of the machine is so easy that he could continue it for four consecutive hours, without fatigue, in a quiet atmosphere.

Mr. Lord, the Superintendent of the Colt Arms Factory, has watched the experiments with much interest, and his opinion as a practical scientist is of value. He says that while he does not see an immediately practical use in this flying machine, he cannot but regard it as a great step in progress, one which should be recognized as of immense importance and encouragement for hope of speedy good results in the way of aerial travel.—*New York Sun.*

### The Musical Phonograph.

Professor Johnson lately exhibited in this city a new instrument supplied by Mr. Edison, which reproduced Levy's "Last Rose of Summer," the "Carnival of Venice," etc. Every ear was on the alert to listen to the performance of the phonograph. Levy came in front of the mysterious thing, and blew a blast on his bugle horn strong enough, as it would seem, to blow the whole concern out of existence, and when he subsided Professor Johnson reversed the crank, affixed a sort of horn to a disk on the cylinder, and out came all of Levy's music, with all his variations, to the last note The wonderment and delight of the audience were great in the extreme, and they applauded the articulating phonograph as if it were a living and breathing thing. When Miss Cole sang to it "Comin' thro' the Rye," there was intense curiosity to hear how it would be returned, as her voice has a birdlike quality in the upper register that it was thought impossible for the phonograph to counterfeit. When Professor Johnson turned the crank Miss Cole herself sat petrified in astonishment as she heard her very trills imitated by the insensible piece of machinery before her. Of course the song of the phonograph was nothing to that of Miss Cole, because the voice was metallic and without the attributes of flesh and blood, but its close rendition of the words and accent was really marvelous to hear.—*New York Herald.*

### NOTES FROM THE PARIS EXHIBITION.

Mr. Patrick Adie, Broadway Works, Westminster, London, shows in operation the Fraser type-setting and distributing machines. In the composing machine there are long lines of vertical type discharging at the end into vertical gutters converging to a point below; a keyboard causes any required letter to be advanced from its line and to slide down its gutter into the common destination at the bottom—the "stick" or "galley." Thus a long line, or a number of short lines, may be rapidly set up; but there is the great disadvantage that except for figure work, poetry, or similar "takes," the lines must be justified by hand. The distributing machine, which is the reverse of the composer, seems but little improvement over handwork. A speed of 10,000 types (not ems) per hour is claimed; but we should hardly feel inclined to admit such speed, at any rate for more than a short run, and with a "fat take" and practiced hands.

Messrs. Gwynne & Co. show a line of centrifugal pumps for wrecking purposes, etc., and some centrifugal gas exhausters. In the former we note the abandonment of the foot valve and the addition of a small air pump of the reciprocating type, to take its place. There is a pendent self-oiling tube from the center of the shaft, performing the same office as that employed in the "Buckeye" engine, and of somewhat the same construction. The slide valve eccentric on the gas exhauster is shiftable, and an index pointing to abscissas scribed on its plane face indicates very neatly the amount of alteration.

### Thomas Winans.

Mr. Thomas Winans, eldest son of Ross Winans, the well known inventor of the modern railway coach, recently died at Newport, R. I. Mr. Winans served his apprenticeship in his father's shops, and at twenty years of age he went to St. Petersburg, Russia, with a locomotive engine of his father's manufacture and pattern, to compete for the equipping of the then new Nicolai railroad. He was fortunate enough to secure the contract, and this led to his undertaking other public works in Russia, which proved so lucrative that in 1850 he returned to the United States with a fortune of ten million dollars.

It is said that he spent a fifth of this vast sum in making experiments, mainly of a mechanical nature, for his own amusement. He designed and built a cigar shaped vessel, by which he undertook to revolutionize modern notions of marine architecture; at the outbreak of the war, he devised a gun in which bullets were to be projected by steam instead of by gunpowder. He also attempted a new method of ventilation, for which he erected many curious structures, including a huge chimney some 100 feet high. His last efforts were directed toward the fitting up of large organs, to be operated by steam and hydraulic pressure. Mr. Winans died at the age of 58 years.

RAILWAY MILEAGE.—The Cleveland, Columbus, Cincinnati, and Indianapolis railway claims the most remarkable locomotive mileage on record, one of its engines having run 44,526 miles in nine months, or at the rate of 72,000 miles a year. This is more than double the average of the best roads. The engines of the Union Pacific averaged 34,248 miles last year. The record of five engines of the New York Central and Hudson River road shows that their average yearly mileage for seven consecutive years was 46,776 miles, at an average cost for repairs of 2·44 cents a mile; one engine running over 323,100 miles at an average of 1·87 cent for repairs.

A GREAT LOG DRIVE.—Over a thousand choppers were engaged along the Upper Connecticut last winter, and the largest log drift ever driven on that stream has just been got safely home. The drift was started early in April in charge of 250 trained drivers from Maine, New Hampshire, and Quebec, and high water enabled the crews to complete the work in an unusually short time. Of the forty millions constituting the drive, ten millions stopped at McIndoe's Falls, Vt., ten millions to Southern Massachusetts, and the remainder to Hartford.

ALABAMA CORUNDUM.—A correspondent writes us that large quantities of corundum, for emery wheels, are shipped from Tallapoosa county, Ala., to Massachusetts.

© 1878 SCIENTIFIC AMERICAN, INC

### American Trade with France.

Consul Bridgeland, at Havre, reports a large increase in the demand for American grain and provisions in France. The general substitution of corn for oats in feeding tramway and cab horses has increased the demand for this grain to double what it was a year ago. The demand for wheat has also increased. Our principal exports of provisions to France are bacon, pork, lard, tallow, and beef. The shipments of bacon have doubled, and of lard have trebled, those for the corresponding period of last year. The shipment of fresh beef is also an important item, nearly half a million pounds having been received at Havre between November and May.

### IMPROVED SHEARS FOR MARKING STOCK.

The accompanying engraving represents an improved instrument for marking the ears of cattle, so as to enable them to be identified. It consists of three plates or jaws, provided with three handles, and combined as shown. On the faces of the outer jaws are grooves to receive blocks, by which the cutters, one of which is shown separately at A, are held in place. The holders are secured in place by bolts provided with hand nuts. The cutters may be made straight or curved, so as to make different shaped marks, or the latter may be varied by different adjustments of the cutters in the holders. Patented April 30, 1878, by Mr. William Wright, of Warrior Station, Jefferson county, Ala.

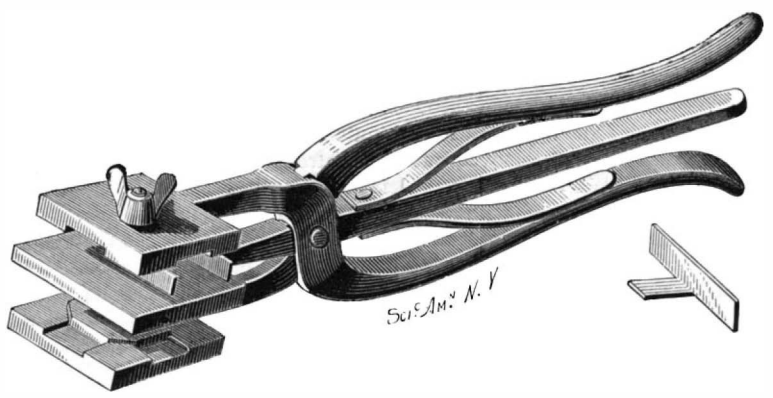


SHEARS FOR MARKING STOCK.

### New Telephone Diaphragm.

M. Louis Olivier has lately devised a form of telephone which differs from the ordinary Bell apparatus chiefly in the shape of its diaphragm. This, instead of being a merely circular plate, is concave, of unequal thickness and elliptical in shape. Its general plane is also inclined to the axis of the instrument. It is attached by the edges, and a thread of silk is fastened to it at its thickest part. The inventor states that the idea is to imitate the construction of the drum of the human ear more perfectly, and that the timbre of the voice is preserved by the improved diaphragm with great accuracy.

### FILE SHARPENING BY THE SAND BLAST.

It is not possible to cut file teeth to perfect chisel shape by ordinary cutting processes. There is always a burr thrown up by the entry of the cutting tool, which gives the teeth a backward curve, as shown in section at A, Fig. 2. It will readily be understood how, in course of use, this burr breaks off, taking with it a portion of the edge of the tooth and leaving the latter rough and jagged, while the detached portions frequently clog the grooves, causing the file to scratch and pin. The remedy for dull files is recutting, but this costs nearly as much as it does to replace the tool with a new one, the metal is greatly reduced in grinding off the old teeth (this is especially the case with rasps), and the temper of the tool is often impaired, or warping or cracking is caused. As a matter of practical fact, consequently, it may be said that dull files cannot be sharpened, to any advantage, by recutting processes.

Latterly, however, an ingenious application of the sand blast has been made to this purpose, and, we are informed, and as appears from samples of work exhibited to us, with remarkable success. The sand blast, as all are aware, consists of a stream of sand driven by steam or compressed air with sufficient force against any hard resisting material to abrade the latter. The adaptations are numerous and valuable, and it may be said to have revolutionized the art of glass engraving. Its employment for file sharpening, and not only to this but to the sharpening of all edge tools, even to razors, is entirely novel, and we are inclined to think it of more than ordinary importance. A moment's consideration will show that there is really no difference between grinding metal with sand compacted in the solid form of the grindstone or with the same material in the finely pulverized condition, impelled by air or steam blast; but it will further be seen that the sand blast has capabilities which no grindstone or grinding process can in any particular equal.

Referring to Fig. 2, at A, we have represented file teeth as ordinarily cut; at B, the teeth are regular and perfectly chisel shaped, and the difference is clearly apparent. The mode of changing one form of tooth into the other simply depends upon directing the sand blast against the back of the teeth at an angle of from 10 to 15 degrees to the tanged end of the file. Naturally, however, it will be asked why the blast has, as it obviously must have, a selective action; that is, why it does not cut away the tooth uniformly, with the apparently unavoidable result of dulling instead of sharpening the tooth. Here, however, comes in one of those exceedingly neat performances which are always a pleasure for the mechanic to appreciate. The effect of the sand blast is in some measure proportionate to the resistance offered. Thus, a layer of rubber varnish or even a piece of paper will turn a blast which cuts into the hardest stone, simply because the particles rebound from the elastic surface. Now, a tooth from its wedge shaped form may be regarded as offering a constantly decreasing resistance from base to point, the latter becoming, as it were, more and more spring like. The consequence is that while the sand cuts, say, with full force into the resisting base, its force is decreased by the yielding and elasticity of the point. Hence more metal is abraded at the base than at the apex, and the obvious result is that the point is ground away in very much less ratio of rapidity than the body of the tooth. Hence the latter must have at all times a keen edge. It is, furthermore, an obvious corollary that repetition of the process cannot affect the result. A file may be used until dulled, subjected to the blast again, and the teeth are at once restored to their former shape, and this may be continued as long as the teeth preserve their general shape.

The process is equally applicable to the dead smooth file or the coarsest rasp, and the temper of the tool is in no wise injured. The inventor informs us that a new file sharpened by the sand blast has outlasted six others of the same make and size not so sharpened, and has displaced fifty per cent more metal with the same number of rubs, and the inventor further claims that an old worn out file resharpened by the blast will do more service than any new file not so treated.

The simple apparatus used for applying the blast is represented in Fig. 1. The file is suitably held, and at the same time is moved forward, with also a to and fro sidewise motion. Sand and water from the bucket below is impelled upon each side of the tool by the steam from the pipe, C, entering the injector nozzles at D. The jets mingle and enter the large inclined tube, out of which the water and sand run back into the pail.

When dead smooth files or delicate edge tools are to be sharpened, the pipes to the nozzles are raised, so that water holding but little, and that the finest, sand in suspension is injected, and in this way, by lowering the inlet, the quantity of sand taken up, and hence the abrasive force of the blast, may be varied.

The inventor informs us that many shops in Bridgeport, New Haven, Hartford, and other New England manufacturing towns are availing themselves of the process at a large saving of expense. The Nicholson File Company of Providence have also contracted for its application to the files manufactured by them. For further particulars relative to licensing, etc., address the patentee, Mr. Milo A. Richardson, Bridgeport, Conn.

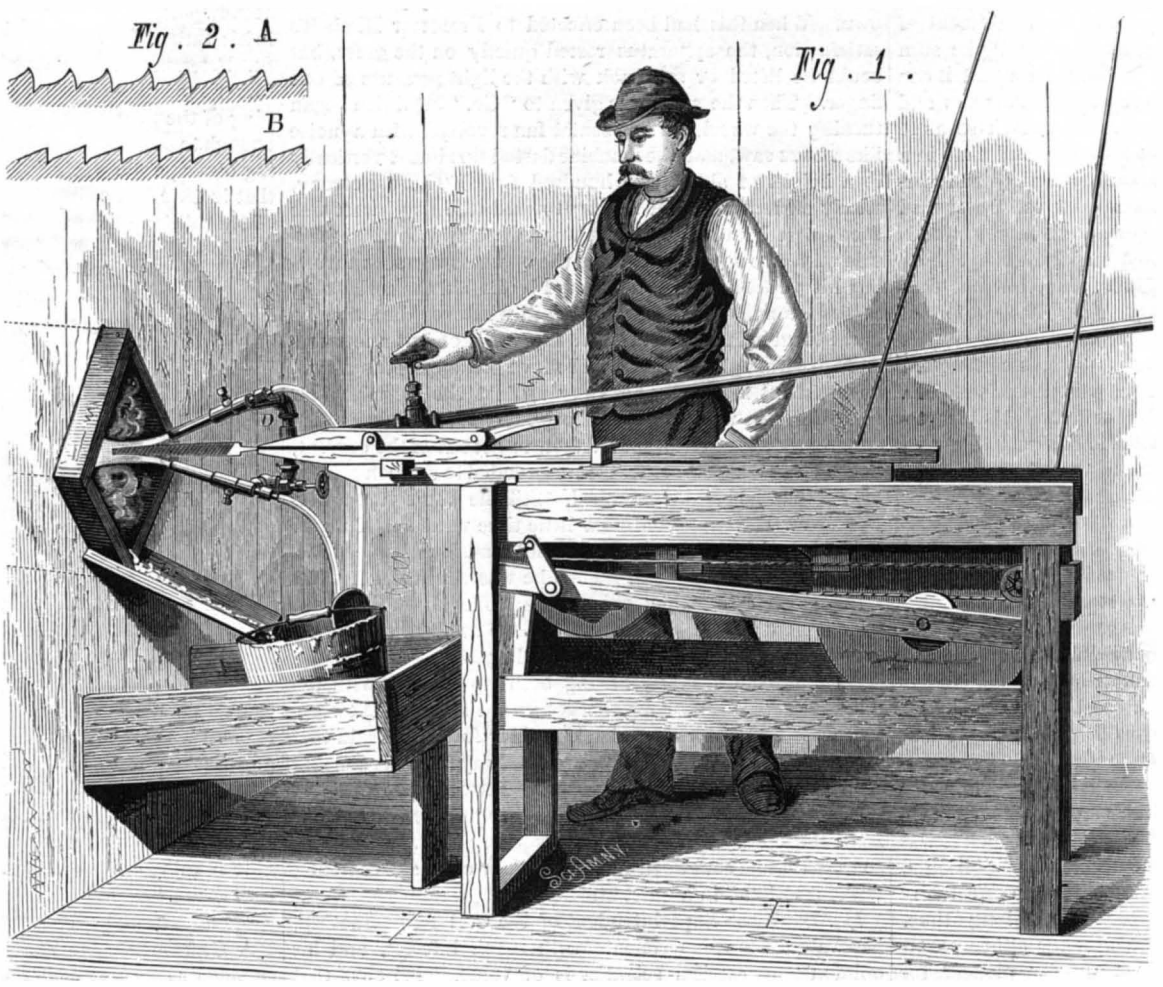


FILE SHARPENING BY THE SAND BLAST.

### New Agricultural Inventions.

In an improved Churn, the invention of Mr. G. W. Jones, of Farmington, Ky., the apparatus for reciprocating the dasher consists of two differential pulleys and adjustable levers and connecting rod, whereby power and speed may be varied, as required by the condition or quantity of the cream to be churned at a given time.

Mr. John Clayton, of Brainerd, Minn., has invented a Wheel Attachment for Plows, for which it is claimed that the construction is such as to admit of adjustment for use with different kinds of plows, and to cut any desired width and depth of furrow; that it will cause the plows to work at uniform depth, and hold them to their work without attention from the plowman, except at the beginning of a furrow.

Mr. D. G. Rich, of Sand Bank, N. Y., has patented an improved Milking Pail, the cover of which is made with a central strainer of gauze wire, having about its edges a raised and flaring funnel which is permanently fixed to the cover, and into which the stream of milk is directed.

Messrs. G. F. Newell, Sr., and Joseph Croft, of Osseo, Wis., have made an improvement upon that form of grain separator in which the mixed grain and impurities are passed over a perforated screen by the frictional contact of a revolving endless apron. It consists in arranging the screen at an incline, to facilitate the passage of the grain, and in combining therewith a peculiar tension-adjusting device, which serves to keep the apron tight and flat down against the grains on the surface of the screen, to prevent the cockle grains from jumping the holes, as they would, in passing down the incline from their own momentum, if the apron became loose and baggy and only touched the grains at certain points.

Mr. John Wisda, of Defiance, Ohio, has devised an improvement in the Braces of Thrashing Machines, and for holding similar large and heavy machinery steady while being used. The brace is formed of a base bar having a hook which is hooked upon a wheel of the machine, and having notches upon its upper side, into which the lower end of an inclined bar is placed. The upper end of the latter is pointed and rests against the frame of the machine, and is secured by a hand screw.

A new Cultivator, invented by Mr. D. L. Wellman, of Frazee City, Minn., has the advantage of a form of construction which permits considerably increased width without impairing its strength or making it unduly cumbersome and heavy.

In a new Plow, the invention of Mr. J. Oldendorph, Jr., of Waterloo, Ill., the special feature is the mode of securing the handles to the iron beam, so as to firmly brace them against vertical strain. This is effected by an arrangement of braces which bear upon the beam, mouldboard, and handles, binding the parts securely together.

MOTHER-OF-PEARL may be polished with finely powdered pumice stone which has been washed to separate the impurities and dirt, and then finished with putty powder and water applied by a rubber, which will produce a fine gloss.

© 1878 SCIENTIFIC AMERICAN, INC

### THE DOUM PALM.

The doum palm (*Hyphæne thebaica*), an illustration of which appears on this page, is remarkable among palms in having branching stems. The trunk is simple when young, but in old trees is forked three or four times, each branch terminating in a tuft of large fan-shaped leaves. The fruit is of about the size of an orange, irregular in shape, with a polished yellowish brown rind, inclosing a single horny seed. The rind, which is dry, fibrous, and mealy, is said to taste somewhat like gingerbread, and is used as food by the Arabs. Although the tree is quite a large one, the trunk itself is seldom over 30 feet high.

### OFFICIAL PREJUDICE

General A. A. Humphreys, Chief of Engineers, U.S.A., has recently addressed to the chairman of the House Committee on Levees and Improvements of the Mississippi, an extraordinary letter. The main object appears to be to discredit the work of Captain Eads and to defeat the efforts of that gentleman now being directed toward the more vigorous prosecution of the already successful undertaking. General Humphreys has always been a strong advocate of the Fort St. Philip canal scheme of opening the Mississippi and a non-believer in the efficacy of Captain Eads' plan. But whatever his views may be, they certainly do not justify him in completely shutting his eyes to absolute fact, as he does when he asserts "*that the opinions expressed to the effect that a new bar would form at the sea end of the jetties, and that it would extend into the sea more rapidly than the old bar, are correct, even during the changes going on under the scouring power of the jetties, aided by dredging between and seaward of them.*"

Instead of there being an advance there is an actual recession of the bar, and the jetties have not even been carried out to their projected length, as they are actually more than 200 feet shorter to-day than they were originally intended to be. The deepening has been so marked at the sea ends of the jetties, where the predicted bar growth was to occur, that Captain Eads has not found it necessary to complete them as far out as they were located and partly built two years ago.

Perhaps more inexplicable than any is the assertion, on the part of General Humphreys, to the effect that the "results actually attained at the South Pass disprove the views of Mr. Eads and confirm those of the Engineer Department." The General certainly cannot have read the report of Generals Barnard and Wright, made last January, which, after announcing the presence of a channel nowhere less than 200 feet wide and 22 feet deep, from South Pass, between the jetties, to the deep water of the Gulf of Mexico, says: "This result is so exclusively due to the jetties and auxiliary works that the auxiliary aid of appliances, if in such we include dredging machines, is utterly insignificant." Or if he prefers to ignore these statements of two distinguished officers of his own corps, he certainly must know, as a matter of common notoriety, that the heaviest draught ships are already using the jetty channel.

Captain Eads has published the letter to the Committee of the House, in which he answers General Humphreys' separate allegations in a way which leaves no two opinions concerning either the statements themselves or the motives which prompted them. It is a matter of regret that an officer of General Humphreys' rank and distinguished abilities should permit his prejudices so seriously to warp his better judgment.

THE CARGO OF THE IDAHO.—The cargo of the lost steamer Idaho furnishes an index of the current contributions of America to the Old World. It comprised 141 packages of agricultural implements; 77,000 pounds of bacon; 98 packages of clocks; 17,311 bushels of corn; 1,904 bales of cotton; 94 bales of hops; 58 horses; 200 tons of fresh meat; 75 tierces of salt meat; 2 cases of machinery; 5 pianos; 12 kegs of printing ink; 25,258 bushels of wheat; 12 packages of manufactured wood.

A NOVEL application of the electric light is proposed by Professor Edison. His plan is to make a diminutive light apparatus, and inclose it in a glass globe of such size as to be easily swallowed. He will connect it with a suitable battery, and he expects to be able to witness the process of digestion, and to see with more or less distinctness the operations of the internal organs.

DON'T SWALLOW CHERRY PITS.—A man died in Vermont the other day, after suffering from dyspepsia for twenty years. Some peculiar circumstances in his case led to a post mortem examination, which revealed thirteen cherry stones imbedded in the lining of the stomach, causing a thickening of the walls of that organ some three fourths of an inch, and ultimately the man's death. It was the opinion of the physicians that the stones had been there many years.

### IMPROVED YIELDING HAT.

The annexed engraving represents an improved hat for firemen, policemen, and others, by which the force of falling bodies or of blows may be broken sufficiently to protect the head against injury. The brim is made separate from the hat body, and is provided with a raised portion which is

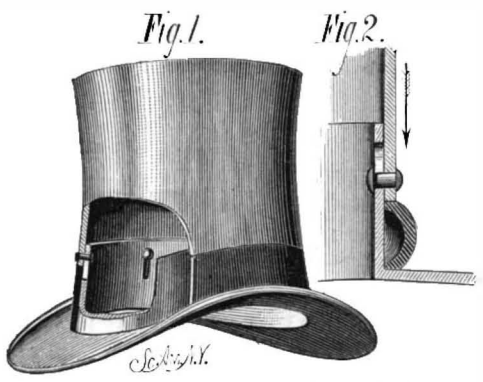


fitted to the head. The body slides on the rim portion as shown in section, Fig. 2, and is guided by slots and pins, and supported by a cushioning spring. This device was patented through the Scientific American Patent Agency, February 26, 1878, by Mr. José M. de Celis, of New York city.

PROFESSOR EDISON intends to employ his telephone for distinguishing sounds within the thorax and other cavities of the body, in place of the stethoscope. It will be of great advantage in medical schools, as a single telephone will be applied to the subject, and as many receiving instruments as may be required will be placed in communication with it for the use of students.

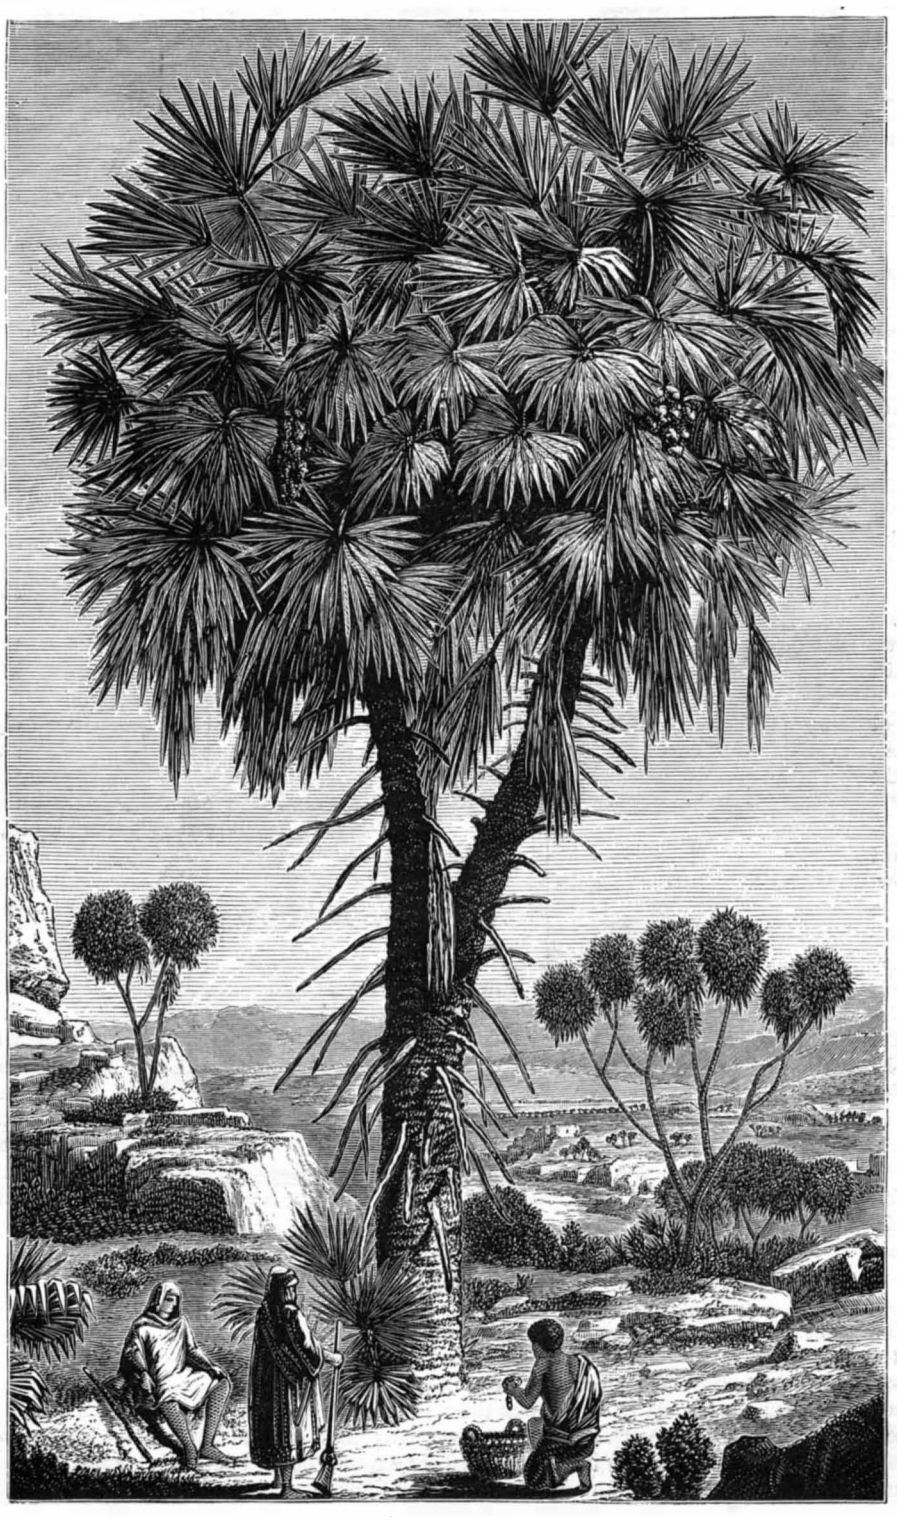

THE DOUM PALM.

### NOTES OF PATENT LAW—DECISIONS OF THE COURTS.

The Atlantic Giant Powder Company brought suits against Goodyear and Townsend for infringement of Nobel's reissued patent, for an explosive compound consisting of a combination of nitro-glycerin with infusorial earth. The question presented on the motion for preliminary injunctions was, whether the pulverulent powder compounded of the usual proportions of nitrate of soda, charcoal, and sulphur, as used in the "Vulcan blasting powder," in combination with nitro-glycerin, was, for the purposes of, and in that combination, the equivalent of "the substance" described in the Nobel patent as possessing "a great absorbent capacity, and which at the same time is free from any quality which will decompose, destroy, or injure the nitro-glycerin, or its explosiveness;" thus, when combined with nitro-glycerin, forming out of the two ingredients "a composition which, without losing the great explosive power of nitro-glycerin, is very much altered as to its explosive and other properties, being far more safe and convenient for transportation, storage, and use than nitro-glycerin."

The preferred form of this substance, as described by Nobel, was the *Rieselgurgh*, or infusorial earth. The substance used by the defendants, in combination with nitro-glycerin, was a mealed powder of nitrate of soda, charcoal, and sulphur, in proportions the same as in some gunpowder in common use in granular form.

It was not contended that the substance itself used by the defendants did not possess, in the combination, every property claimed for the infusorial earth in the dynamite patent, or that the combination of it with nitro-glycerin, as "Vulcan blasting powder," did not possess every attribute and property in a greater or less degree possessed by dynamite.

The contention of the defendants was, that the only object and aim of Nobel's invention, as patented, was to render nitro-glycerin safer in handling and transportation; that there was no intent to augment its explosive force; that, on the contrary, the solid substance exerted no influence and remained as inert matter, while the object of the manufacturer of the Vulcan powder was stated to be "to render the explosion and combustion of gunpowder instantaneous."

It was further argued by the defendants that Nobel in his original letters patent described his absorbent as an "inexplosive" substance, and that if the omission of the term "inexplosive" in the reissue enlarged the scope of the invention, the reissue itself was void; and that if the reissue was to be construed in connection with the original, and for the same invention, it must be limited to the use of absorbents as equivalents which were inexplosive.

The court, however, in disposing of the first objection raised by the defendants, holds that evidently it was not the sole or principal object of the defendants, in manufacturing Vulcan powder, to render the explosion and combustion of gunpowder instantaneous. That if this was the only object of the combination, why begin the process by substituting for the granular gunpowder, so highly explosive, a mealed powder of the same ingredients in a pulverulent state, and of a lower degree of explosiveness than grained powder? The fact was that gunpowder, when used as an absorbent in the Vulcan powder, fulfilled every condition and performed every function of the absorbent in Nobel's patent, besides possessing the additional function, at the time of the explosion, of co-operating, by means of its conversion into gas, with the nitro-glycerin, in rending the rock, instead of remaining, like the infusorial earth, an inert substance. This latter fact, however, rendered it no less an equivalent. The legal reports are full of cases proving that, when a substitute is used for one ingredient in a patented combination which has every property and performs every function of the original in the combination, it does not cease to be an equivalent because, in addition, it does something more and better.

In disposing of the second objection the court holds that the word "inexplosive" was applied in the original patent as a term of description to a substance only preferentially used. The word was used in the original patent to describe substances which, as compared with nitro-glycerin, were inexplosive by concussion, which would not of themselves explode under those conditions which render nitro-glycerin so dangerous and unsafe, and which, inexplosive in themselves under those conditions, when combined with nitro-glycerin, would make the combination a compound which would also be inexplosive except under such conditions as were not inconsistent with substantial safety in its use for blasting and similar purposes. The word was properly omitted in the reissue, not for the purpose of including equivalents which were not

© 1878 SCIENTIFIC AMERICAN, INC

within the scope of the original invention as described, but as an ambiguous expression not consistent with the other words in the specification, which clearly described the absorbent, its properties and functions, all of which properties and functions might appertain to a substance explosive under some conditions, but inexplosive under those conditions which made nitro-glycerin explosive by concussion. The court grants the preliminary injunctions asked, holding that the complainants are not limited to treat as infringements the use of such equivalents only as are actually inexplosive, but they are entitled to the exclusive use of such equivalents as are inexplosive as compared with nitro-glycerin, and which, while complying with the other requisites of the infusorial earth in the combination, will also, when combined with nitro-glycerin, form out of the two ingredients a composition which, without losing the great explosive power of nitro-glycerin, is more safe and convenient for transportation, storage, and use than nitro-glycerin.

### New Inventions.

Mr. S. P. Cox, of Brooklyn, N. Y., has patented an improved form of Bracelet made of stone, jet, or other material, but especially of stone. It consists in a series of blocks or plates strung upon spring wires, having sufficient elasticity to hold the bracelet upon the arm when the edges of the bracelet are brought together and secured by a fastening similar to a butt hinge. The same inventor has also designed a Locket, so constructed that no metal is visible except the eye or loop to receive the guard.

A new Fire Escape, the invention of Mr. J. S. Shaw, of Joplin, Mo., consists of a folding ladder, made of links and rounds bent of one piece of wire, which is stowed compactly in the hollow sill of a window and suitably secured at its upper end, and is always ready for use.

Mr. Sylvester Snell, of Watertown, N. Y., has patented an improvement upon that form of Animal Trap in which the weight of the animal upon a tilting platform is made to close the doors of the cage. The inventor adds an ingenious mechanical device, operated by the weight of the animal's fore feet, which unceremoniously precipitates him into a pit below.

An improved photographic Camera Shutter, invented by Mr. A. Johnson, of Kewanee, Ill., consists of an interior swinging shutter of novel construction, arranged to shut off the light passing through the camera tube, the object being to provide a means of opening and closing the tube without the knowledge of the sitter.

An improved Thill Coupling, recently patented by Mr. W. L. Wheeler, of Birmingham, Ill., is designed to admit of the thills or pole being readily detached when desired. To the axle is secured a thill clip, having lugs to receive the pin which fastens the irons of the thill or tongue. By means of a pivoted and slotted lever the pin may be easily withdrawn or locked into position by a key forming the outer end of the lever.

Mr. G. L. Reynolds, of Oakland, Cal., has made an improvement in the class of Window Screens, in which the upper and lower wire screens are attached at one end directly to the sashes, so that when the latter are raised or lowered to open them, the screen will be extended over the opening and thus exclude flies, mosquitoes, or other insects without excluding air. The improvement consists in journaling a screen roller in a groove formed in the meeting rail of a sash, and in attaching to said screen roller one balance cord of the journal of the roller and the other balance cord to the sash.

An improved School Desk, patented by Mr. J. P. Pies, of Spades, Ind., belongs to that class of desks which are so made as to be raised or lowered at will. The improvement consists in a new device by which the desk can be readily adjusted and firmly secured in the desired position.

A new Leather Dressing Compound, for boots and shoes, harness, trunks, etc., designed to impart a lustrous black gloss, as well as to preserve and protect the leather, has been patented by Messrs. Norman Quinlan and J. H. Quinlan, Jr., of Glen Falls, N. Y. It is made of shellac, ivory black, alcohol, castor oil, and turpentine in certain proportions.

Mr. J. F. Johnson, of Yocum Station, Va., has made an improvement in Pen Holders, designed to render the pen yielding to pressure upon the point, and to adapt it to be carried in the pocket. It consists in arranging the pen socket in a tubular case, so as to slide freely, with a spiral spring behind the same, which tends to project the pen beyond the tube to its working position, the pen being retracted in the tubular case by means of a stud extending through a longitudinal slot in the said case, and secured by being turned axially into a notch.

Mr. David Healy of Los Angeles, Cal., has patented a Waste Trap designed to prevent the escape of sewer gas, to prevent siphoning, and to supply hot and cold water to a basin through concealed pipes. It has two water seals arranged in a peculiar manner, and a float valve which when subjected to suction adheres more closely to its seat, thus preventing the removal of water from the trap.

An improved Blackboard arrangement has been invented by Mr. H. W. Eastman, of Baltimore, Md., in which the blackboard proper is pivoted in a frame, in which it slides up and down, so that it may be reversed in position to bring either side to the front. The special point consists in balancing the blackboard by means of a sliding frame adapted for holding alphabetical or arithmetical tablets, said board and tablet frame being connected by ropes which pass over pulleys at the top of the fixed frame, in which the movable parts slide vertically; the arrangement being such that the blackboard is prevented from turning on its pivots when the tablet holder is lowered into the required position behind it.

An improved Buckle for harness, which may be disengaged from the strap or trace in connection with which it is used, without the necessity of drawing upon the strap or trace to release the buckle tongue, has been patented by Mr. R. J. S. Graham, of 79 Murray street, New York city (care of Edward A. Boyd). It has an open frame, which may be drawn together or spread apart by an adjusting screw, and has a movable bar which hooks over the sides of the frame when the buckle is in use, but is released, so as to liberate the buckle tongue, by turning the adjusting screw.

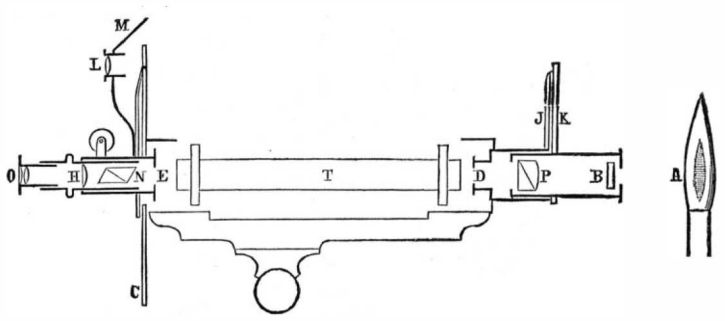


Fig. 1.—SACCHAROMETER IN SECTION.

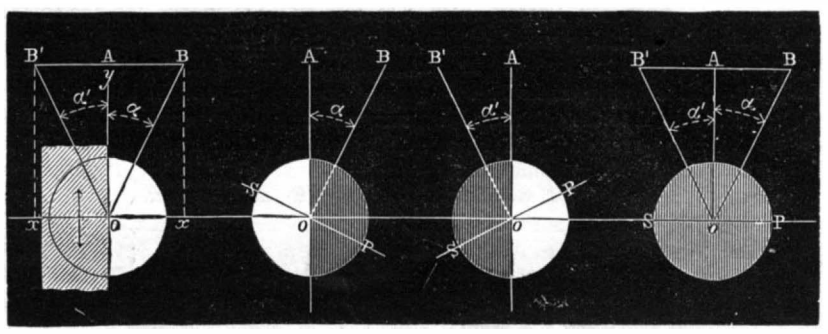


Fig. 2. Fig. 3. Fig. 4. Fig 5

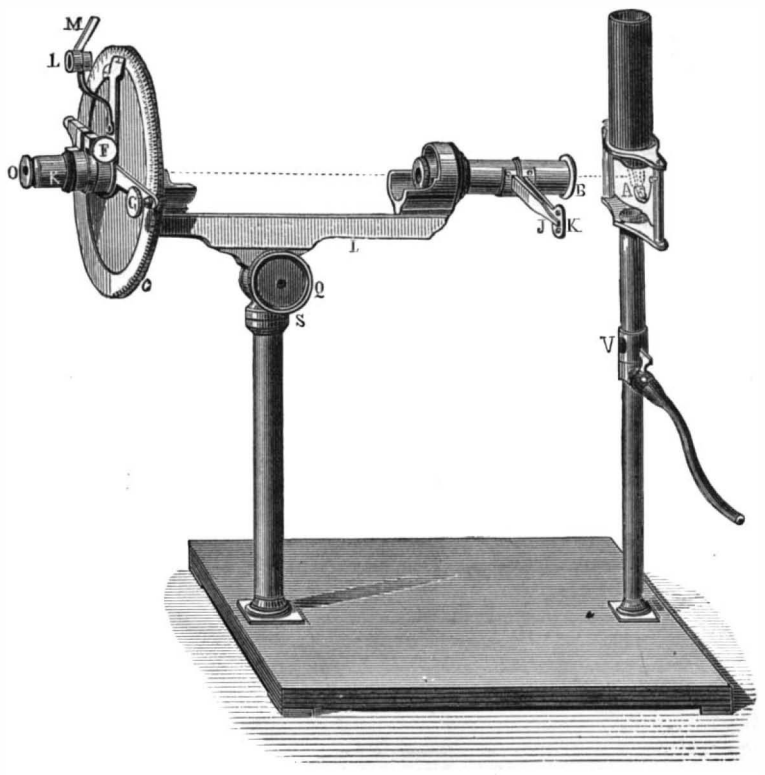


THE NEW LAURENT SACCHAROMETER.

Mr. J. W. McGarrett, Jr., of Nashua, N. H., has devised a movable Copy Holder for children when learning to write, the advantage of which is that the copy may be moved down the page as the writing progresses, so that the learner may always have his copy before him, instead of using the line last written as a copy for the next. The holder is made of tin, wood, or other suitable material, and has flanges upon its edges to receive the copy slip, and feet which support it at the right inclination.

### THE NEW LAURENT SACCHAROMETER.

We are indebted to *La Nature* for the annexed illustrations of an improved saccharometer, by which, it is stated, observations of unusual accuracy may be made. The apparatus is represented in longitudinal section in Fig. 1. A is a yellow monochromatic flame, placed at an invariable distance from the instrument. The burner is constructed so as largely to augment the intensity of the flame. B is a diaphragm containing a plate of bichromate of potash, which absorbs the violet and blue rays which exist in the flame, while allowing the useful yellow rays to pass. P is a bi-refracting prism, in which the second image is diverged to one side and intercepted by diaphragms. It turns on the axis, O E. D is a diaphragm carrying a thin plate of quartz parallel to the axis, the thickness of which is one half wave for the yellow rays. This is fixed and covers but the half of the diaphragm. E is another diaphragm; N, the analyzing Nicol; H, the objective; O, concave eye piece. The system, O H N, is mounted on an alidade, which turns on the disk, C, around the axis, O E. T is the tube containing the solution to be tested. C is a graduated disk having one or two divisions; one especially for sugar, the other in half degrees of the circle for any rotary substances. L is a lens for reading the scale. M is a mirror throwing the light of the burner on the divisions and thus obviating the need of any additional light. The new optical disposition consists in the polarizing system, which is composed of two distinct parts—the bi-refracting prism, P, which turns, and the diaphragm, D, which with its half plate of quartz is fixed. In Fig. 2 this diaphragm is represented enlarged, as it is seen on looking into the instrument. The left half is covered by the quartz plate, the axis of which is also parallel to the line of separation, O A, and the right half being open allows of the passage without deviation of the polarized light from the polarizer, P, Fig. 1.

Let it first be supposed that the plane of polarization is parallel to O A. If this be left fixed and the analyzer, N, be turned, there will be a progressive passage from total extinction to maximum illumination, and the two halves of the disk will always remain equal to each other in intensity exactly as if the quartz plate did not exist. The plate being always fixed, let the polarizer be turned so that the principal section comes at O B, making with the axis, O A, any angle, $a$. Let a vibration occur in the plane represented by O B. This vibration, represented in length by O B, may be decomposed into two others—one, O Y, parallel to the axis, O A, of the plate, and the other, O X, perpendicular. This vibration will pass without deviation on the right side, but on the left it will be deviated by the plate. The ordinate, O Y, being parallel to the axis of the quartz will not change sign, but the abscissa, O X, which is perpendicular thereto, will change sign, and will come to O X′ at 180°, since the plate is a half wave in thickness; so that at the left side the vibration resulting will occur in the plane, O B′, making with O A an angle, $a'$, symmetrical and equal to $a$. This plate therefore has for its object to determine at the left side a principal section, O B′, placed with relation to the line of separation, O A, symmetrically to the principal section, O B, on the right side. If the polarizer be left fixed in this position, and the analyzer be turned so as to render the principal section, S P, perpendicular to O B, Fig. 3, there will be total extinction at the right side, but partial at the left side, as shown. Reciprocally, if the principal section, S P, of the analyzer is perpendicular to O A (Fig. 4) there will be total extinction on the left and only partial on the right side. Finally, if the section, S P, be perpendicular to O A (Fig. 5) there will be partial extinction for both sides and equality of tone, since $a = a'$.

If the analyzer be left fixed in this last position, and the polarizer be turned so that the principal section makes with O A angles varying from 0° to 45°, the two semi-disks will always remain relatively equal in intensity, but together will change their common intensity, passing from complete extinction to maximum illumination. In other words, if the apparatus is regulated at zero—that is to say, at the equality of tones—and if the polarizer be turned while their relative intensity will not be changed, their common one will pass through all degrees.

If, however, after causing the polarizer to make any angle whatever with O A, and leaving it fixed in this position, the analyzer be turned over a small angle in either direction from S P, Fig. 5, then the equality of tones in the two semi-disks is at once broken, and one becomes dark and the other light. This sudden change allows of the determination, with great precision, of the position of the analyzer; that is, of the zero of the instrument when no substance is interposed. If by interposing a substance possessing rotary power the equality of tones is destroyed, it is necessary to turn the analyzer until this equality is re-established, and the angle over which the analyzer is moved shows the rotary power of the substance.

© 1878 SCIENTIFIC AMERICAN, INC

### PATENT GEAR-DRESSING MACHINE

We illustrate herewith a new machine for dressing teeth of gear wheels, either of iron or wood, or made bevel or spur. To bevel wheels it is claimed to give a perfect reducing cut, making the small end of the cog the same proportionate shape as the large end. The motion is transmitted to the tool block by a central shaft, permitting the radial bar that carries the tool to be swung to any angle from 0° to 90°. It is also hinged, so as to permit of a vertical movement. The form is placed under the bar, and by moving it to or from the center, wheels of different pitch can be planed with the same form.

To dress spur gears, the head is moved crosswise on the frame, the bar is swung to 0°, or parallel to the spindle on which the gear is chucked, the form is placed under the tool holder, and the latter is fed over it. To dress wood gears and patterns, a bracket, which holds a thick circular saw, is held in the tool post; it is driven from a radial countershaft overhead, receiving a quick rotary motion and reciprocating at the same time. It is fed over forms the same as if planing iron, only much quicker, as the saw cuts both ways, the feed being continuous.

The machine is constructed so as to plane the smallest pinion as well as wheels of the full capacity. The gear to be planed is chucked on the overhanging end of a spindle and on the other end is the index wheel, which is accurately spaced. The head which carries the spindle can be moved to or from the center of radial bar, for the purpose of adjusting the gears to be planed, so that the radial lines terminate at the proper point. The end of the radial bar is laid out in degrees. On a wheel that the angle on pitch line is 60°, by planing the pinion on 30° it will, it is claimed, be perfect. Any imperfections of patterns or turning lathe are corrected in the dressing. In dressing wood gears the turning of the face and ends is done in the planer and at the same time that the teeth are shaped.

For further particulars address the manufacturer, Mr. William Gleason, Brown's Race, Rochester, N. Y.

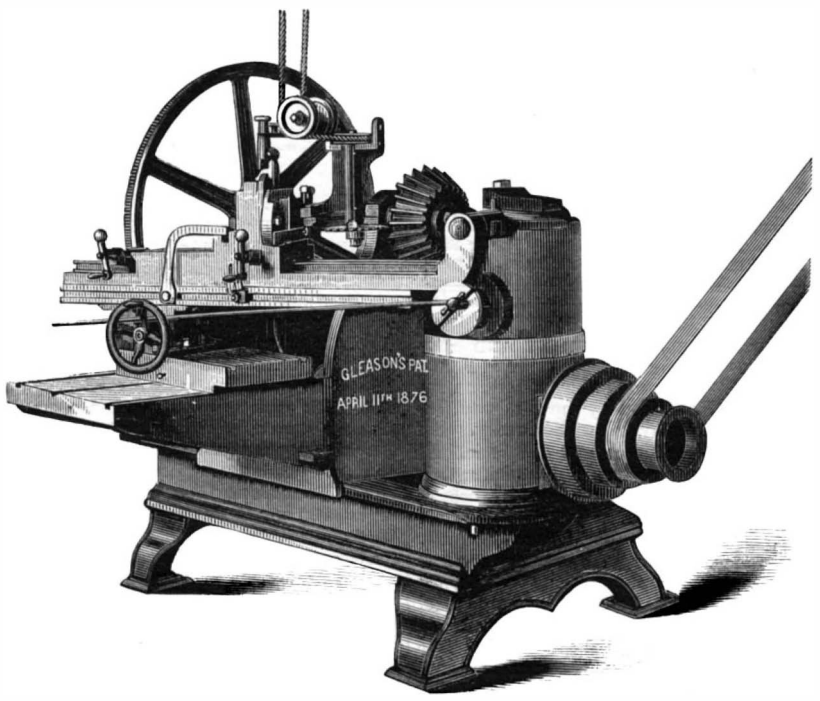


GLEASON'S GEAR-DRESSING MACHINE.

### Atmospheric Absorption of Solar Forces.

M. Marchand states that during the vertical passage of the sun's rays through the atmosphere, they are despoiled of 74 per cent of the chemical power which they possessed at the moment when they reached the outer boundary of the aerial ocean. According to the experiments of Bouguet, Pouillet, and others, under the same conditions the rays lose 13 per cent in illuminating and calorific power, so that it would appear that the calorific and chemical influences of light are absorbed by the atmosphere under very different conditions.

### AN IMPROVED GANG PLOW.

The implement shown in the accompanying illustration is one of the new quadruple gang plows manufactured by Messrs. Howard & Co., of Bedford, England, who are manufacturers of convertible plows. It combines the functions of two or three plows in one, and is adjustable for a variety of work, the parts being constructed with a view to removal or alteration in arrangement at short notice. As a gang plow many advantages are claimed for it, principal among which are lightness, facility of repair, and the readiness with which the depth of the plowing may be regulated. The latter is effected by the long lever as the implement proceeds, without stopping the team, and at land's end the same lever lifts the four plows clear of the ground to facilitate turning. In this and other respects it resembles the better type of gang plows made in this country, and it is especially intended for the rapid shallow plowing which is preferred in the West. The manufacturers designed it, we believe, for the East India market.

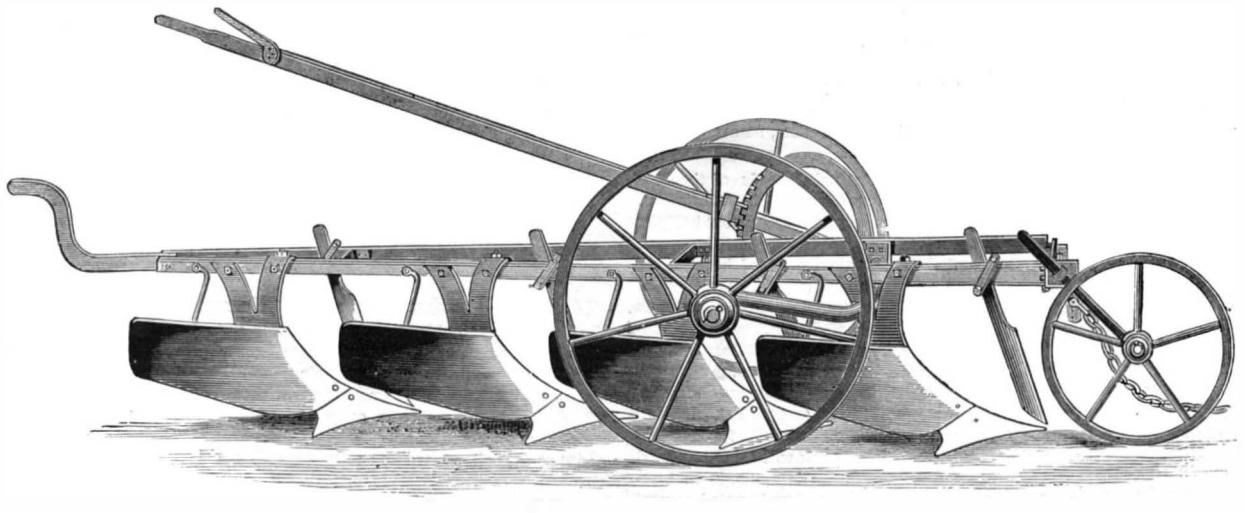

HOWARD'S GANG PLOW.

A ROYAL STREET CAR.—A handsome car is being built in this city for the use of Dom Pedro in his trips between his country seat and his palace in Rio Janeiro. It is about the size of an ordinary car, but, owing to its elaborate fittings, will cost about three times as much. Special devices are introduced to insure perfect ventilation. The same firm are also building a lot of cars for the Finsbury Tramway of London. They are provided with top seats, which are self-closing by means of a spring.

### Telephone Improvements.

M. Maiche states in *Les Mondes* that he has succeeded in suppressing the peculiar metallic quality imparted to the voice transmitted through the telephone by substituting for the metallic diaphragm a rubber membrane about 0·4 inch in diameter by 0·04 inch in thickness, to the center of which a disk of tinned iron of the same thickness and about 0·1 inch less in diameter is attached. In face of the magnet the rubber is exposed, over an area a little larger than that of the face (we infer from M. Maiche's description that this transforms the disk into a ring), and the membrane is brought to within 0·04 of an inch of the magnet. M. Maiche claims in this way to realize two apparently antagonistic conditions, namely: 1. A thickness of iron sufficient to react on the magnet with sufficient energy, and to develop sufficiently intense induced currents; 2. A vibratory sensibility, which allows of the reception of very weak sounds. The voice heard, moreover, is identically similar to that of the speaker talking over a distance of a few yards. There is no alteration in timbre, and all the characteristic qualities are preserved.

M. Maiche has also found that long magnets, some 16 inches in length, on which wire was wound over a third of their extent with few coils, are much more sensitive than short magnets. The distance to which sound may be transmitted depends principally on the size and length of the magnet coil and on the section of the conductors. A copper wire, 0·4 inch in diameter and 8 inches long, making four or five turns around the magnetized bar, suffices to transmit the sound over a distance of several yards. The membrane of the transmitting instrument M. Maiche considers should be much larger than that of the receiver. The first should be from 3·2 to 4 inches in diameter; the second reaches its maximum sensitiveness at diameters between 1·2 and 1·6 inch.

### The Marginal Shield-Fern as a Tæniacide.

Mr. C. H. Cressler communicates to the current number of the *American Journal of Pharmacy* the result of some experiments made by him to test the efficacy of the marginal shield-fern (*Aspidium marginale*) in the expulsion of the tape-worm. He was led to make these trials through the failure, on a certain occasion, of an emulsion of the oleoresin of the imported male fern (*A. filix mas.*,) to effect satisfactory results. As might have been expected from species so nearly allied, he found the constituents of the former to be identical with those of the male fern, and its efficiency to be fully equal. The marginal shield-fern is one of our most widely distributed species of the North, is very common in all of our woods, and, being an evergreen, may be collected at any season of the year. Most of the male fern for medicinal use has hitherto been imported, although the plant is found northward in the region of Lake Superior, and westward. Mr. Cressler's experiments were made with the oleoresin obtained from the rhizome of the fresh plant, and administered in gelatine capsules.

### POISONOUS LEGUMINOUS PLANTS.

Leguminous plants, on account of the great abundance of albuminous material, in addition to starch, found in their seeds, have always been considered the equals of the most nutritious cereals—such as wheat, etc.—as articles of food. Of such plants the common bean has probably been largest known and is most widely distributed. It was cultivated by the Jews, and considered as sacred by the Greeks and Romans. A temple to the God of Beans, *Kyanetes*, stood upon the sacred road to Eleusis; and the *Kyanepsia*, or bean feast, which the Athenians celebrated in honor of Apollo, was characterized by the use of these legumes. To the Egyptians the bean was an impure fruit, and they did not venture to touch it. The black speck on the white wings of the flowers was formerly looked upon as the written character of death; for which reason the bean in ancient times passed as the symbol of death. It has been reserved for modern times to learn that "death" may indeed "lurk in the pot" with at least some of these hitherto unsuspected pod-fruited plants. Attention has been called to the fact by Dr. Rothroch that certain leguminous plants growing in our Southwestern Territories possess poisonous properties. In the vicinity of Fort Garland, in Colorado, cattle have quite often given evidence of poisoning, which on investigation has been traced to the plant *Oxytropis lamberti*. The effects that follow the eating of this plant appear to be long enduring, the animal becoming demented and wasting away as its fondness increases to something like the opium habit in man. Dr. Rothroch detected at New Camp Grant, Arizona, another plant, *Hosackia purshiana*, the effects of which are similar to the preceding. According to the *Academy*, Professor Cohn has recently reported a case of the poisoning of hundreds of sheep, at Namslau, from eating *Lupinus*. Two circumstances were spoken of as probable causes. Professor Cohn had, a year previously, demonstrated the existence in *Lupinus* of an active bitter principle, of which the poisonous properties, closely allied to the poisonous alkaloid of the water hemlock, are established. The other possible cause was found to be the occurrence, in most of the specimens submitted, of sclerotia, which burst out in the form of small black warts closely arranged in parallel series. Professor Cohn remarked that the question as to whether the poisoning should be attributed to the lupine or the fungus must be settled by chemical investigation. Subsequent experiments, however, in cultivating the fungus from the sclerotium have not as yet led to the production of any specific form that could have produced the poisoning. The lupines grow wild throughout the whole of Europe and in India and Arabia, and are mostly used as food for cattle, although the seeds are sometimes used by the poorer class of people. America has also its lupine (*Lupinus perennis*), and its bitter seeds are eaten from Canada to Florida. Another poisonous leguminous plant proves to be *Sophora speciosa*, from Texas. From the seeds of this Dr. H. C. Wood, Jr., has extracted an alkaloid which he calls *Sophoria*. The effects of this are stated to resemble those of the calabar bean. The seeds are used by the Indians of Texas to induce an intoxication which lasts from two to three days. Half a bean will, it is said, cause intoxication, and a whole one may be productive of dangerous symptoms. As to the alkaloid, Dr. Wood states that three grains of it hypodermically failed to very seriously affect a dog, but killed a cat in a short time.

### The Coming Wheat Crop.

The harvest began in Missouri May 20, fully a month before the usual time. By the first of June the harvest season opened in Southern Illinois. The crop is magnificent throughout the entire country, and promises to be the largest ever gathered. The yield is estimated as high as 500,000,000 bushels. The movement of breadstuffs Eastward of late has been unprecedented.

© 1878 SCIENTIFIC AMERICAN, INC

## Business and Personal.

*The Charge for Insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.*


Church Pipe Organs, new and second-hand, ready for delivery. Send for particulars. Henry Erben & Co., Organ Builders, East 23d St. near 2d Ave., New York.

Assays of Ores, Analyses of Minerals, Waters, Commercial Articles, etc. Technical formulæ and processes. Laboratory, 33 Park Row, N. Y. Fuller & Stillman.

More than two miles per day of the celebrated Asbestos Roofing are made and shipped to all parts of the world by the H. W. Johns Mfg. Co. of this city. This Company are also the most extensive manufacturers of Liquid Paints, Coatings, Cements, Boiler Coverings, and other materials for structural and mechanical purposes.

Wanted.—Apparatus for Filling Toy Rubber Balloons. Address J. Merker, Hot Springs, Ark.

For Electric Bells, Telegraph Instruments, all parts of the Telephone, etc., send to Milton F. Jones, Natick, Mass.

Capital wanted to assist in the manufacture of a new and valuable invention. The inventor has received a large number of orders for his apparatus, but lack of means has prevented the manufacture. For particulars address C. W. Barry, Box 104, Orange Valley, N. J.

For Sale—A full set of Patent Office Reports, 1848 to 1870. Address Box 698, Providence, R. I.

For Sale—State Rights. The only Instrument approved of and used by the United States Treasury and Mint for testing gold and silver coin. Pronounced by experts to be the only effective and reliable test ever made. For description and information see Scientific American, June 8 and 15, 1878. Address P. Doherty, 92 East 10th Street, New York.

Steamboat Officials can buy Flannel Suits of Baldwin the Clothier, and have the regulation buttons put on the coats without extra charge. This will save the officers 20 to 30 per cent. We are glad to commend Baldwin to all our readers.

Scroll Saws.—We have on hand four Moyer's Patent Iron Frame Scroll Saws, and will sell them for one half their cost to build. They are good in every respect, and adapted to all kinds of work. Address Wood, Smith & Co., Fort Plain, N. Y.

Wanted—Machinery for fruit canning factory. Geo. Bartlett, Oshawa, Ontario.

$800 will buy letter patent on my improved Fruit Picker. For information, address H. C. Berbeyer, Price, Mo.

Telephones and Material at greatly reduced prices. Telephone Supply Co., Box 3,224, Boston, Mass.

Bolt Forging Machine & Power Hammers a specialty. Send for circulars. Forsaith & Co., Manchester, N. H.

Diamond Self Clamp Paper Cutter; oward's Parallel Vise. Howard Iron Works, Buffalo, N. Y.

Best Steam Pipe & Boiler Covering. P. Carey, Dayton, O.

Cornice Brakes. J.M. Robinson & Co., Cincinnati, O.

Sperm Oil, Pure. Wm. F. Nye, New Bedford, Mass.

Power & Foot Presses, Ferracute Co., Bridgeton, N. J.

Painters' Metal Graining Plates. J.J. Callow, Clevel'd, O.

Vertical Scientific Grain Mills. A.W. Straub & Co., Phila.

Foot Lathes, Fret Saws, 6c., 90 pp. E. Brown, Lowell, Ms.

Improved Wood-working Machinery made by Walker Bros., 73 and 75 Laurel St., Philadelphia, Pa.

Pulverizing Mills for all hard substance and grinding purposes. Walker Bros. & Co., 23d and Wood St., Phila.

For Town and Village use, comb'd Hand Fire Engine & Hose Carriage, $350. Forsaith & Co., Manchester, N. H.

Zero Refrigerator, with cooler. Centennial award. Send for catalogue. A. M. Lesley, 372 Sixth Ave., N. Y.

The SCIENTIFIC AMERICAN Export Edition is published monthly, about the 15th of each month. Every number comprises most of the plates of the four preceding weekly numbers of the SCIENTIFIC AMERICAN, with other appropriate contents, business announcements, etc. It forms a large and splendid periodical of nearly one hundred quarto pages, each number illustrated with about one hundred engravings. It is a complete record of American progress in the arts.

Nickel Plating.—A white deposit guaranteed by using our material. Condit, Hanson & Van Winkle, Newark, N.J.

Cheap but Good. The "Roberts Engine," see cut in this paper, June 1st, 1878. Alse horizontal and vertical engines and boilers. E. E. Roberts, 107 Liberty St., N. Y.

For Shafting, Pulleys, Hangers, etc., send for price list and discount to Hilles & Jones, Wilmington, Del.

Improved Steel Castings; stiff and durable; as soft and easily worked as wrought iron; tensile strength not less than 65,000 lbs. to sq. in. Circulars free. Pittsburgh Steel Casting Company, Pittsburgh, Pa.

Presses, Dies, and Tools for working Sheet Metals, etc. Fruit and other Can Tools. Bliss & Williams, Brooklyn, N. Y., and Paris Exposition, 1878.

Manufacturers of Improved Goods who desire to build up a lucrative foreign trade, will do well to insert a well displayed advertisement in the SCIENTIFIC AMERICAN Export Edition. This paper has a very large foreign circulation.

The Cameron Steam Pump mounted in Phosphor Bronze is an indestructible machine. See ad. back page.

Bound Volumes of the Scientific American.—I have on hand bound volumes of the Scientific American, which I will sell (singly or together) at $1 each, to be sent by express. See advertisement on page 414. John Edwards, P. O. Box 786, N. Y.

Friction Clutches for heavy work. Can be run at high speeds, and start gradual. Safety Elevators and Hoisting Machinery a specialty. D. Frisbie & Co., New Haven, Ct.

1,000 2d hand machines for sale Send stamp for descriptive price list. Forsaith & Co., Manchester, N. H.

Wrenches.—The Lipsey "Reliable" is strongest and best. Six inch sample by mail 60 cents. Roper Caloric Engine Manufacturing Co., 91 Washington St., N. Y.

Climax Washing Machine. Reliable Agents wanted. Descriptive circulars furnished. N. C. Baughman & Co., York, Pa.

Diamond Tools. J. Dickinson, 64 Nassau St., N. Y.

The Turbine Wheel made by Risdon & Co., Mt. Holly, N.J., gave the best results at Centennial tets.

Solid Emery Vulcanite Wheels—The Solid Original Emery Wheel—other kinds imitations and inferior. Caution.—Our name is stamped in full on all our best Standard Belting, Packing, and Hose. Buy that only. The best is the cheapest. New York Belting and Packing Company, 37 and 38 Park Row, N. Y.

Hydraulic Presses and Jacks, new and second hand. Lathes and Machinery for Polishing and Buffing metals. E. Lyon & Co., 470 Grand St., N. Y.

F. Lunkenheimer's Brass Goods for Engine Builders, Automatic Oil Feeders, Glass Oil Cups, Cody Shaft Oilers, etc. Address Cincinnati Brass Works.

Special Planers for Jointing and Surfacing, Band and Scroll Saws, Universal Wood-workers, etc., manufactured by Bentel, Margedant & Co. Hamilton, Ohio.

Water Wheels, increased power. O.J. Bollinger, York, Pa.

Wm. Sellers & Co., Phila., have introduced a new Injector, worked by a single motion of a lever.

Valuable Invention to users of Steam Boilers. See advt., page 318, last issue. Address U S. Automatic Stoker Co., No. 2 Chestnut St., Philadelphia, Pa.

For Shafts, Pulleys, or Hangers, call and see stock kept at 79 Liberty St. Wm. Sellers & Co.

For Solid Wrought Iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa., for lithograph, etc.

We make steel castings from ¼ to 10,000 lbs. weight 3 times as strong as cast iron. 12,000 Crank Shafts of this steel now running and proved superior to wrought iron. Circulars and price list free. Address Chester Steel Castings Co., Evelina St., Philadelphia, Pa.


## NEW BOOKS AND PUBLICATIONS.

THE ROAD MASTER'S ASSISTANT AND SECTION MASTER'S GUIDE. By W. S. Huntington. Revised and enlarged by Charles Latimer. Published by the *Railroad Gazette*, 73 Broadway, New York city.

This is a valuable treatise on a branch of railroad work about which not much has been written, and yet upon which the safety and economical management of railway lines very largely depend. The best feature of the book is that it avoids technicalities and addresses itself directly to the practical side of its subject. It begins with track laying, and takes up in order the topics of laying the rails, spiking, construction of cattle guards, culverts, etc., ballasting, elevation of curves, track repairs, frogs, and switches, etc. The volume is clearly written, and contains numerous good illustrations.

UPLAND GAME BIRDS AND WATER FOWL OF THE UNITED STATES. By A. Pope, Jr. Published by Scribner, Armstrong & Co., New York city.

We have already directed attention to this magnificent work, the sixth part of which, recently issued, is now before us. The present number contains two splendidly executed water color facsimiles of paintings of the Canada Grouse and the Wood Duck, together with the descriptive letter press. Both as a work of art and as a contribution to the literature relating to the natural history of the country, this collection of plates will be of lasting value.

DETERIORATION AND RACE EDUCATION. By Samuel Royce. Edward O. Jenkins, Publisher, 20 North William street, New York.

The author thinks that the race is deteriorating. He holds that society, and the means of preventing ever present morbid tendencies from settling into abnormal and anti-social formations, must be the chief study of the future teacher; and that the great work of the latter is the application of physical, mental, and social hygiene to the physical, mental, and social degeneracy as manifested by an excessive rate of mortality, insanity, pauperism, and crime. The work is well written, and abounds in illustrative facts and instances, together with much useful statistical information gathered from a wide range of literature.

STUDIES IN LUKE. S. R. Wells, Publisher, 737 Broadway, New York. Price 60 cents.

This is the original Greek text of the Gospel, and an interlined literal translation, together with illustrative foot notes, appendix of weights, coins, names, phrases, and other explanatory matter.

We have received Reports and Awards of the Centennial Exposition, covering Groups 28 to 36 inclusive. As a maximum average we suppose that about half the contents of this voluminous series of reports has some utility; the remainder, being simply lists of the premium winners, is of no value perceptible to us. It may be of interest for John Smith to read that his production is "commended for excellence of design, beauty of finish," etc., and perhaps, if very few exhibitors in common with him attained like commendation, the general public might find therein a useful guide as to the relative importance and merit of the various exhibits; but as several thousand contributors come in for like encomiums, this portion of the work will be appreciated chiefly as showing how rich the language is in commendatory adjectives. We have already noted several good reports in the series, and to this list we can now add those of the Judges on Educational Exhibits and on Horological Apparatus.

## Notes & Queries

(1) J. L. asks: What is a good way to case-harden iron links and blocks for locomotives? A. Heat the metal to redness, sprinkle prussiate of potash upon it, and plunge into cold water.

(2) "Subscriber" writes: In making soda water, what is the best practical proportion of sulphuric acid to marble dust? A. Mathew recommends 3 lbs. of marble to 5 pints of sulphuric acid.

(3) F. A. L. asks: How can I remove the black color caused by rubbing a match against the side of an ornamental bright brass match box? A. Use a little moistened emery on a soft cloth; or first apply strong hot potash solution to the parts, wash this off with water, then moisten with nitric acid, rub with sawdust or a soft cloth and water, dry, and relacquer. Dilute alcoholic shellac solution colored with dragon's blood and turmeric is the lacquer generally used.

(4) H. P. writes: Last fall I bottled some cider, "curing" it with sulphite of lime and mustard seed. At present the most of it lacks life, although an occasional bottle has sufficient carbonic acid gas to give an agreeable taste. Can you suggest a way to enliven the dead cider? A. Add about 30 grains of bicarbonate of soda and one third that quantity of citric acid to each bottle, stopper securely, and invert for a time.

(5) C. B. T. asks: What is a good and cheap substitute for linseed oil in making putty? A. Menhaden and cotton seed oils have been used, either alone or mixed with a little linseed oil.

(6) C. R. P writes: By leaving the key of a telegraph instrument open, thus breaking the circuit, does the liquid in the battery cease to operate on the amalgamated zinc? A. The battery fluid does not entirely cease to act on the zinc and mercury. These metals would in time be gradually dissolved, even if the electric circuit were kept open. It would then be said that the "negative" was dissolved by "local action."

(7) T. A. T. asks: What is the speed of a perpendicular fall of water of 100 ft. at a temperature of 4° Celsius? A. About 2½ seconds.

(8) C. W. B. writes: Recently an artisan in this town dissolved a quantity of gold (coin and old jewelry) by the aid of nitro-muriatic acid. From the solution he threw down a precipitate with aqua ammonia. This precipitate was placed on a filter and allowed to drain dry, but not washed. The precipitate and containing filter paper were then placed in a crucible with carbonate of soda and carbonate of potash. The crucible was then placed on a forge, and, when heat was raised, an explosion took place great enough to shatter the crucible and scatter its pieces and the fire of the forge to all parts of the shop. What was the cause? A. A large part of the precipitate formed by the addition of ammonia to the gold solution consisted of ammonium aurate or fulminating gold ($Au_2O_3 4NH_3OH_2$), a very explosive compound; we do not wonder at the result.

(9) F. C. C. asks for a simple mode of testing the inflammability of coal oil. A. In a small cup or glass place a quantity of the oil to be tested, and immerse in the oil the bulb of a good thermometer; suspend the cup containing the oil in a vessel of water and gradually heat the water; move about close to the surface of the oil a lighted taper, and note the degree on the thermometer at which the oil begins to emit inflammable vapor (the flashing point), and again that at which the oil inflames. Oil to be used in lamps should not take fire below 115° Fah. In applying the lighted taper the flame must be kept away from the glass of the thermometer.

(10) J. S. asks: How are the different cuts of files denominated? For instance, what constitutes "bastard cut," "second cut," etc.? A. Bastard cut is a little finer than a rough file. Second cut is still finer than a bastard; then comes smooth, superfine smooth, and dead smooth.

(11) J. P. asks: What is the chemical composition of the "Pharaoh's serpents?" A. The light solid matter composing the "serpent" consists of mellone, melam, and mercuric sulphide; the substance from which it is evolved (the "egg") is mercuric sulphocyanate—the precipitate obtained by the addition of mercuric nitrate to solution of ammonium or other alkaline sulphocyanate, washed and dried.

(12) T. R. S. asks: Is there any process by which strong or rancid butter can be cleansed and restored to its original condition? A. Rancid butter may be improved by working it over with fresh cream; also by digesting it for a short time in a melted state with a quantity of fresh, granular animal charcoal, free from dust, and after straining thoroughly, reworking. See p. 102, vol. 36.

(13) I. H. T. writes: Suppose a block of ice with a thermometer imbedded in it in a temperature 10° above zero. Will the thermometer go to zero if the ice be placed in an atmosphere of zero? In other words, does the temperature of ice vary? A. The temperature of ice varies with the temperature of surrounding objects below 32° Fah.; the thermometer would register 0°, provided the conditions remained constant long enough.

(14) P. M. B. asks: Can a ⅝ inch round rod of iron, say 60 feet long, secured at each end of a building with a nut and washer, with no support in the center, be drawn taut enough to sustain from 400 to 500 lbs., to be carried along the same by a car, without bending? A. It cannot be made to carry any weight whatever without some deflection. You will find rules for amount of deflection in works on the strength of materials.

(15) M. C. asks: What is meant by the internal grooving and pitting of boiler plate? A. Grooving is the formation of channels in the iron, and pitting is the formation of little depressions of dish form made in the iron at various places.

(16) W. M. B. writes: I have frequently noticed during a storm that the thunder which succeeds a flash of lightning sometimes commences far off towards the horizon, and gradually increases in intensity until it ends in a loud burst nearly over our heads. As the discharge is accomplished in an instant almost, why is it that we hear the thunder from a distance first sometimes? A. The following explanation, from "The American Cyclopedia," may be satisfactory to you: "This sound may be prolonged, as it is reflected in echoes by the clouds; or, as suggested by Sir John Herschel, it may come in successive impulses to the ear, as brought from an instantaneous discharge that extends for miles along a line directed away from the observer. So the terrific sudden crash may be the result of a flash occurring all around the observer, with no great difference of distance from him in the points of the discharge."

(17) J. C. W. asks: Would an iron railing or cresting on the roof of a building increase the danger from lightning? A. No. The iron railing would assist in protecting the building if it were connected with a rod well grounded in the earth.

(18) G. H. C. asks: Can black oxide of manganese be dissolved so as to produce a jet black liquid suitable for an ink? I have made a solution in hydrochloric acid, which produces a brownish green liquid? A. None of the manganese salts form solutions suitable for inks. Strong aqueous solution of potassium permanganate forms purplish red ink, which flows readily from a pen and soon turns brownish black.

(19) J. W. B. asks: 1. What pressure per square inch is necessary to reduce or compress atmospheric air of common density, inclosed in an airtight cylinder, to one half, one fourth, and one eighth its volume? A. If the temperature of the air is maintained constant during the compression, the pressure varies inversely as the volume. 2. What are the advantages claimed for hydraulic elevators over steam ones? A. The motion of the hydraulic elevators is claimed to be smoother and more free from jars.

(20) S. R. S. asks: How can I harden brass wire which has been softened? I have tried slow cooling in stove and in ashes, but without success. A. By rolling or hammering it cold.

MINERALS, ETC.—Specimens have been received from the following correspondents, and examined, with the results stated:

E. A. P.—The dextrin is of good quality. It contains a very little starch and a trace of glutinous and saccharine matters. Use hot water and do not add too much of the dextrin flour at a time.—H. O. T.—No. 1 is colophonite and black garnet in pyroxene; apparently also zircon. No. 2 is coccolite and wollastonite with garnets and a small quantity of pyrites and mispickel. No. 3 is mostly actinolite—a variety of hornblende.


FLOATING AND SUSPENDED MAGNETS; Experiments illustrating the Action of Atomic Forces, the Molecular Structure of Matter, Allotropy, Isomerism, and the Kinetic Theory of Gases. By ALFRED M. MAYER. 22 figures. Phenomena of Compressibility and Porosity; two Essential Chemical Laws; and the Modern Doctrine of the Composition of Matter clearly explained. Matter in Constant Motion; Character of Motion. Diffusion of Gases explained. Why Heat Expands. The same elements occurring under different Forms. Minute Instructions for performing Pleasing and Instructive Experiments illustrating the Foregoing Laws of Matter, the only Materials required being a few needles and corks and a bar magnet. How to Exhibit these Experiments before a large audience. The Most Important Laws of Chemical Constitution Demonstrated in the Simplest Manner. Also, a paper by HENRY A. MOTT, JR., on the Application of Polarized Light to the Examination of the Alkaloids of the Quinin Group, and Samples of Unknown Composition. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. **129.** Price 10 cents. To be had at this office and of all newsdealers.

THE INTERIOR OF THE EARTH. Abstract of Address before the Cumberland Association for the Advancement of Literature and Science. By SIR GEO. B. AIRY, F.R.S. Triangulation; how the Earth is Measured. Dimensions, Form, and Variable Density of Earth. Tremendous Pressure at Center. Rotation of Earth. Fluid Condition of Interior; Singular Occurrence in Surveying. Heat; Volcanic Action everywhere. Earth's Magnetism and its Variations. How the earth was formed. Nebulæ, what they are; Heat from their Condensation; Curious Facts; the Nebular Hypothesis. What the Spectroscope Reveals. Density of Earth, Sun, and Planets. Cause of Volcanic Action. Also, VESUVIUS and the Surrounding Country. By Prof. C. E. CROSBY. Its Topography, Geological History, and Present State. Its connection with Historic Events, the Destruction of Pompeii, Herculaneum, etc. Phenomena and Explanation of Eruption. The Grotto del Cane, &c. Both papers contained in SCIENTIFIC AMERICAN SUPPLEMENT No. **129.** Price 10 cents. To be had at this office and of all newsdealers.

THE
# Scientific American.

**The Most Popular Scientific Paper in the World.**
**THIRTY-THIRD YEAR.**

**Only $3.20 a Year including Postage. Weekly. 52 Numbers a Year.**

**This widely circulated** and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information, and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc.

**All Classes of Readers** find in THE SCIENTIFIC AMERICAN a popular *resume* of the best scientific information of the day; and it is the aim of the publishers to present it in an attractive form, avoiding as much as possible abstruse terms. To every intelligent mind, this journal affords a constant supply of instructive reading. It is promotive of knowledge and progress in every community where it circulates.

**Terms of Subscription.**—One copy of THE SCIENTIFIC AMERICAN will be sent for *one year*—52 numbers—postage prepaid, to any subscriber in the United States or Canada, on receipt of **three dollars and twenty cents** by the publishers; six months, $1.60; three months, $1.00.

**Clubs.—One extra copy** of THE SCIENTIFIC AMERICAN will be supplied gratis *for every club of five subscribers* at $3.20 each; additional copies at same proportionate rate. Postage prepaid.

One copy of THE SCIENTIFIC AMERICAN and one copy of THE SCIENTIFIC AMERICAN SUPPLEMENT will be sent for one year, postage prepaid, to any subscriber in the United States or Canada, on receipt of *seven dollars* by the publishers.

The safest way to remit is by Postal Order, Draft, or Express. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

**MUNN & CO.,**
**37 Park Row, New York.**

**To Foreign Subscribers.**—Under the facilities of the Postal Union, the SCIENTIFIC AMERICAN is now sent by post direct from New York, with regularity, to subscribers in Great Britain, India, Australia, and all other British colonies; to France, Austria, Belgium, Germany, Russia, and all other European States; Japan, Brazil, Mexico, and all States of Central and South America. Terms, when sent to foreign countries, Canada excepted, $4, gold, for SCIENTIFIC AMERICAN, 1 year; $9, gold, for both SCIENTIFIC AMERICAN and SUPPLEMENT for 1 year. This includes postage, which we pay. Remit by postal order or draft to order of Munn & Co., 37 Park Row, New York.


© 1878 SCIENTIFIC AMERICAN, INC

# INDEX.

## ILLUSTRATIONS.


### A

Accumulator, hydro-pneumatic.. 127
Aerial warfare..... 287
Ant bear..... 343
Apocynum..... 216
Apple worm..... 103
Arches for tunnels, metallic..... 70
Archippus butterfly..... 215
Agave, cactus, etc..... 377
Ash sifter, Empire..... 338

### B

Bale tie..... 229
Balloon torpedo..... 287
Baobab..... 263
Barometric pressure and life..... 121
Basin stopper, Carnes'..... 70
Basin valve, Gilbert's..... 291
Bath, shower..... 179
Bath water heater..... 40
Battery, Byrne's ..... 293
Batteries, Plante's secondary..... 313
Becquerel, M..... 361
Bed, Cate's spring ..... 328
Bernard, Claude..... 307
Birthwort..... 263
Black cock and ptarmigan..... 151
Blast recorder..... 130
Blood disks, curious..... 24
Boat, collapsing..... 343
Boat propelling device..... 166
Boiler feed heater..... 319
Boiler feeder, Rice's..... 6
Boiler feed regulator..... 198
Boiler, Firmenich safety..... 399
Boiler flues, corrugated..... 67
Boiler scale..... 261
Boiler setting..... 391
Bolt cutter and nut tapper ..... 54
Bon ton game..... 114
Brick machine, Brownhill's..... 211
Brick machine, Vanier's..... 115
Bridge, East River, approach.... 207
Bridge, East River, cable making, 303, 306
Bridge, Nile..... 135
Bridge, proposed Thames.....329, 361
Brown & Sharpe machine tools. 271
Brush making..... 351
Buck-board wagon, Phillips'.... 166
Bug exterminator..... 278
Butterfly, Archippus..... 215

### C

Cactus, agave, etc..... 377
Cactus, cereus candicans..... 151
Calliper making..... 85
Cash recording machine..... 95
Calorimeter, liquid..... 185
Car, sailing ..... 239
Caster, glass ball..... 6, 374
Cement tester..... 130
Cereus candicans..... 151
Chimney, Hinckley's..... 210
Chuck, centering..... 210
Chuck, Cushman's..... 226
Chuck jaw, independent..... 194
Chuck, planer..... 245
Cider mill, Sikes'..... 86
Cigarette machine..... 344
Cinchona..... 39
Chelodina, long-necked..... 87
Clam baker, Stroub's..... 279
Cleopatra's needle.....199, 200
Clock, Ithaca calendar ..... 309
Coal cabinet, Hymer's ..... 8
Coin tester..... 355
Codling moth..... 103
Colorado mud volcanoes..... 34
Condenser, Ransome's siphon.. 150
Cotton harvester, Powell's..... 86
Coupling, hose ..... 182
Coupling, pipe..... 55
Cow, Tenth Duchess of Geneva.. 55
Crushing mill, Alden's..... 54
Current wheel..... 41
Cypripedium..... 216

### D

Dental tool stocks..... 275
Diamond settings, platinum..... 217
Ditching machine, Snyder's..... 185
Diver's lamps..... 153
Digging machine, Knight's..... 83
Docking attachment..... 182
Dosimeter, Colmer's ..... 168
Dough mixing machine..... 56
Dovetailing machine..... 246
Drain pipe manufacture..... 31
Draught apparatus, stove ..... 339
Draughtsman's table..... 114
Dredger, Carr's..... 390
Drill, quick speed..... 69
Drilling machine, radial..... 51
Drying apparatus..... 114
Dynamometer ..... 130

### E

Easel for pottery decoration ..... 183
Egg boiler..... 354
Electric light, the Regnier..... 34
Electric submarine lamp..... 153
Elevated railway map, N. Y..... 20
Elevated railway, N. Y.....18, 19, 63, 66, 175, 178, 367, 370
Emery wheel works. .....255, 258
Engine, atmospheric..... 131
Engine, Baxter portable..... 70
Engine, Buckeye..... 310
Engine break down ..... 323
Engine, Eclipse..... 214
Engine, hydraulic..... 150
Engine, Lovegrove's 2 H. P..... 34
Engine, Otto gas..... 195
Engine, Peerless, portable..... 191
Engine, Roberts'..... 342
Engines, Safety Steam Co..... 371
Engines, steamer Grangemouth.. 259
Engine, valve gear, Collmann's.. 386
Engine, Worthington's pumping. 179
Envelope patents ..... 96
Equibus..... 265
Excavator, Reeves'..... *8
Exhaust nozzle, Brainerd's..... 262
Eyes of reptiles and fishes..... 184

### F

Feed, star..... 213
Feed water heater..... 118
Feed water heater, Berryman's.. 47
Feed water heater, Lovegrove's. 319
Feed water heater, Stead's..... 243
Feed water regulator..... 198
File guide..... 146
Fire escape..... 146
File sharpening by sand blast.... 406
Fire telegraphs..... 403
Firework making..... 373
Fish eyes..... 184
Flues, boiler, corrugated..... 67
Forge, Buffalo..... 354
Fossils, huge..... 375
Fountain, Prospect Park..... 215
Fowl monstrosity..... 89
Fulling mill, Baldwin's..... 38
Furnace, puddling..... 35
Furniture caster, Konz's.....6, 374

### G

Gas check, Dark's..... 281
Gas check, Gilbert's..... 291
Gas engine, Otto..... 195
Gas lighter, automatic..... 137
Gas trap, Bower's..... 105
Gas check, Waring's..... 243
Gases, liquefaction..... 111
Gases, liquefaction of..... 71
Gases, liquefaction, Pictet's ap. 147
Gases, liquefaction of..... 73
Gate, farm, Cooksey's ..... 326
Gatling gun aloft..... 227
Gear cutting machine ..... 271
Gear dressing machine ..... 409
Gear instrument, Stolp's ..... 22
Gear wheel teeth..... 36
Gear wheel teeth..... 149
Gilbert elevated railway ..... 178
Goose quill, utilizations of.....50, 51
Governor, marine engine..... 88
Grain toller, Vitts'..... 118
Grinding machine ..... 371
Grinding mill, Baugh's..... 115
Grinding mill, Phillips' ..... 328
Grindstone trough..... 271
Grindstone truing device..... 274
Gyroscope, electrical..... 335

### H

Harrow, Dobbins'..... 199
Hat conformator.....143, 146
Hat, yielding..... 407
Heater, Berryman's feed water.. 47
Heater, feed water..... 319
Hecla, eruption..... *345
Helioscope ..... 163
Hoisting machine, Johnson's.... 102
Hoisting machine, Mason's..... 223
Horn bug..... 249
Horned tragopan..... 119
Hose coupling..... 182
Hydraulic engine..... 150
Hydraulic mining in Cal. .....274, 275
Hydraulic ram, Millington's ..... 166
Hydrogen, Giffard's apparatus. 104

### I

Ice cream beater ..... 102
Ice machine, ether ..... 387
Ice machine, Holden..... 159
Indiarubber tree ..... 103
Injector, the..... 325
Injector, Eclipse..... 290
Insect powder blower..... 278
Inventions, new..... 130
Ironclad, Turkish..... 119

### J

Jack, Rowland's lifting..... 297
Jack, Smith's wagon..... 355

### K

Kneading machine, Boland's .... 56
Knife grinder..... 371
Knots, spiritual..... 321

### L

Ladle for metals, Fawcett's..... 70
Lake, boiling..... 279
Lamp burner..... 355
Larynx, mechanical..... 136
Lathe chuck, centering..... 210
Lathe chuck, Cushman's..... 226
Lathe chuck, jaw ..... 194
Lathe, correcting..... 373
Launch, Barranca's..... 371
Lawn mower, Philadelphia..... 249
Limnoria and teredo..... 73
Lions' teeth, claws, etc..... 135
Liquefaction of gases..... 73, 147
Locomotive exhaust nozzle ..... 98
Locomotive exhaust, Brainerd's. 262
Locomotive strokes..... 143
Lubricator..... 230
Lumber drying apparatus ..... 114

### M

Magnet, Jamin..... 312
Marmoset, silky..... 7
Mercury, transit of..... 347
Meridian circle at Par's ..... 1, 4
Microscope, water lens ..... 258
Micro-tasimeter..... 335
Mill, Baugh's sectional..... 115
Mill, cider ..... 86
Mill, Phillips'..... 328
Millstone dressing machine..... 5
Mineral wool, plant for..... 20
Mineral wool roofing..... 278
Mining, hydraulic.....274, 275
Monsters, artificial..... 312
Moon, apparent size ..... 89
Mosquito net frame..... 339
Motion, perpetual..... 346
Moulding machine..... 232
Mower, Philadelphia..... 249
Mud volcanoes, Colorado..... 34

### N

Needle and thread cutter..... 404
Nut lock, Cushing's..... 244

### O

Obelisk ship..... 199
Observatory, Paris..... 1, 4
Oil stove regulator..... 326
Old Colony accident..... 322
Optical experiments ..... 139
Orchid, beautiful..... 7
Ore crusher, Alden's..... 54
Oroheliograph ..... 116
Ostrich farming ..... 294
Oxygen, liquefaction of..... 71

### P

Palm, doum..... 407
Palmyra palm..... 167
Paper and wire tester..... 69
Paris exhibition, Algerian palace 231
Paris exhibition, British Indian section..... 311
Paris ex., building at Trocadero. 359
Paris ex., Canadian trophy..... 307
Paris exhibition buildings..... 22
Paris ex., International avenue.. 383
Paris ex., vestibule main build'g 15
Pattern work economy ..... 133
Pendulum, Zollner's horizontal. 79
Perpetual motion..... 346
Phonograph, Edison's..... 193
Pine, Pyrenean..... 280
Pipe coupling, Chapell's..... 55
Pipe manufacture..... 31
Pipe tongs, Thornton's..... 281
Pipe wrench, Coleman's..... 264
Pirani's electro-gravitation experiment ..... 80
Plane, Boyce's..... 191
Planer, double surfacing..... 297
Plant mind .....216, 233
Plant propagation..... 229
Platinum tipped settings..... 217
Plow, gang..... 409
Practical mechanism..... 36
Prairie dog and guests..... 375
Press, cider..... 86
Pressure and life..... 121
Pressure regulator, Hand's..... 326
Propeller, Curtis'..... 182
Propellers, raising and lowering 120
Propeller, steering..... 306
Protractor..... 245
Ptarmigan and black cock..... 151
Puddling furnace, Godfrey & Howson..... 35
Pump, Acme steam..... 152
Pump, National steam..... 162
Pump, novel chain..... 393
Pump, rotary force..... 358
Pump, steam siphon ..... 25
Pump, Worthington's duplex steam..... 179
Pumping engine, centrifugal.... 246
Pumping engine, Rider's..... 131
Punching and shearing machine. 165

### R

Radial drilling machine..... 51
Rail puzzle..... 129
Railway sailing car..... 239
Railway trucks and axles..... 226
Railways, N. Y. Elevated.....367, 370
Ram, hydraulic..... 166
Ramie fiber machine..... 72
Renault, Victor..... 329
Reptiles' eyes..... 184
Reservoir recorder..... 130
Respirators and aerophores..... 99
Rheostat, Plante's..... 169
Rifling machine..... 4
Roofing, mineral wool..... 278
Rudder screw, Kunstadter..... 306

### S

Saccharometer, Bottone's..... 181
Saccharometer, Laurent..... 408
Safe, Marvin's..... 82
Safety valve..... 314
Sailing car .....239, 240
Sand pump, Reeve's..... 8
Saw, Stafford scroll..... 217
Saw blade, band..... 266
Saw file guide, Roth's..... 6
Saw mill dog..... 198
Saw mill head block..... 87
School at Kolapore..... 217
Scroll saw, Stafford..... 219
Scrubbing machine, Stockley's.. 230
Serpents at dinner..... 167
Serpents' fangs..... 327
Settings for diamonds..... 217
Sewer trap, Dark's..... 281
Sewer trap, Waring's..... 243
Shaping machine, Manville's..... 358
Shears and engine, Laws'..... 134
Shears for marking stock ..... 406
Shearing and punching machine. 163
Shoe brush, improved..... 387
Shower bath..... 179
Shutter, paper..... 211
Sifter, ash..... 338
Siphon pumps, steam..... 25
Sled, Graether's..... 355
Slotting machine ..... 242
Spheres, turning..... 376
Spider engineering..... 231
Spiral grooving machine..... 4
Spirit knots..... 321
Spring for vehicles, wooden..... 103
Star feed..... 213
Steam engine, Baxter..... 70
Steam engine, Buckeye..... 310
Steam engine, Eclipse..... 214
Steam engine, Lovegrove's..... 34
Steam engine, Roberts'..... 342
Steam engines, safety power..... 371
Steam generator, Stead's..... 243
Steam generator, novel..... 40
Steam pressure regulator..... 326
Stilt, Shute's..... 309
Stopper for basins, Carnes'..... 70
Stove draught apparatus..... 339
Stove pipe expander..... 134
Stove pipe point, Draper's..... *6
Submarine cables, how destroyed 73
Submarine illumination..... 1, 53
Sugar mill, large..... 194
Superheater, Carvalho's..... 118
Swivel hanger ..... 98

### T

Table, draughtsman's..... 114
Telephone, carbon ..... 353
Telephone, new details..... 341
Telephone, Reis' musical..... 57
Telephone, Trouvé's..... 392
Telephonic alarm..... 89
Teredo and limnoria..... 73
Testing apparatus, Bailey's..... 130
Testing machine, wire and paper. 69
Thermometer, Redier's registering ..... 248
Thill coupling, Beard's..... 89
Tide mill..... 41
Timber drying apparatus..... 114
Tool, new..... 151
Torpedo balloon..... 287
Torpedo boats, Russian..... 338
Torpedo guard, Fisher's..... 54
Torpedo warfare..... 82
Tragopan, horned..... 119
Tricycle, Dreadnought ..... 41
Tricycle, English..... 201
Tricycle, Premier..... 296
Tunnel arches, metallic ..... 70
Turning machine..... 271
Turning spheres..... 376

### V

Valve, safety..... 314
Vehicle, new..... 265
Velocipede, Dreadnought..... 41
Velocipede, English tricycle..... 201
Velocipede, Premier tricycle..... 296
Ventilator and chimney ..... 210
Victoria regia..... 247
Vise, Stevens'..... 342
Volcanoes, mud..... 34

### W

Wagon box fastener..... 290
Wagon buckboard, Phillips'..... 166
Wagon jack, Rowland's..... 297
Wagon jack, Smith's..... 355
Water heater for baths..... 40
Waterspouts..... 327
Weighing scoop, Merry's..... 23
Whales and whalebone..... 88
Wheel, Deaderick's..... 308
Wick regulator ..... 326
Windmill, Smith's folding..... 83
Window shutter, paper..... 211
Wire and paper tester..... 69
Wolf, red..... 183
Workshop appliances, new..... 245
Wrench, pipe, Coleman's ..... 264
Wrench, pipe, Thornton's..... 281


# MISCELLANY.

Figures preceded by a *star* (*) refer to illustrated articles.


### A

Academy, French, prizes..... 184
Academy of Sciences, Am..... 297
Academy of Sciences, N. Y..3, 69, 277
Accidents, remarkable..... 341
Accumulator, hydro-pneumatic.*127
Advertising a mode of motion.... 306
Advertising, illustrated..... 393
Advertising, Stewart on..... 314
Æolian harp.....(22), 60, (42) 204
Aerial navigation..... 263
Aerial warfare.....*287, 291
Aerophores and respirators..... *99
African exploration.....276, 378
Agave, cactus, etc .....*377
Agricultural dep't naturalist.... 276
Agricultural department, use of. 392
Air, liquefaction of ..... 64
Alacrane reef..... 297
Alarm, telephonic..... 89
Albumen, to prepare..... 90
Albuminoids in foods..... 105
Alcohol, reagent for..... 178
Alizarine ..... 106
Alkali test..... 1
Alloys, sonorous ..... 2 5
Aluminum manufacture..... 121
Amber, artificial.....(9) 331
American goods, foreign markets 291
American manufactures abroad.. 128
American scientists, honors to... 112
American trade with France..... 406
Amplifier, Tolles'.....152, 202
Anæsthetics ..... 7
Animals, educated..... 161
Annealing castings.....(39) 220
Ant bear.....*343
Ant, exterminating..... 279
Antiquity of civilization..... 404
Ants, habits of..... 313
Anthropology..... 98
Antiseptic, bichromate of potash 154
Apes at N. Y. Aquarium..... 325
Apparatus, simple..... 4
Apple worm.....103, *138
Aquarium cement.....(10) 250
Aquarium, New York..... 99
Aquarium, educated animals at.. 161
Arches for tunnels, metallic..... *70
Archippus butterfly..... *215
Arctic exploration..... 192
Arctic expedition, Bennett's.... 179
Arctic expedition, Franklin's.... 319
Arctic expedition, Howgate.181, 276
Arctic expedition, Nordenskold. 133
Arctic explorations..... 112
Armor plating, new system ..... 48
Arsenic ..... 346
Arsenical wall papers..... 187
Arsenic antidotes ..... 278
Artesian well, Pesth..... 47
Ash sifter, Empire .....*338
Asphaltum pipes.....(13) 250
Astor library..... 181
Astronomical photography..... 197

### B

Bacteria.....40, 167, 186
Baird, Prof. S. F..... 378
Bale tie..... *229
Balloon and northwest passage.. 73
Balloon photographs..... 291
Balloon torpedo..... *287
Baobab..... *263
Barometer, aneroid.....(6) 283
Barometer, a leech..... 213
Barometer, simple..... 135
Barometric pressure and life..... *121
Barrow, England ..... 352
Basin stopper, Carnes'..... *70
Basin valve, Gilbert's..... *291
Bath, shower..... *179
Bath water heater..... *40
Bats, to destroy..... ....(26) 331
Battery, Byrne's..... *293
Battery for electrotyping .....(16) 299
Battery, percussion cap.....(6) 267
Batteries, Plante's secondary.... *313
Battery for nickel plating ..(1) 123
Battery, Smee.....(17) 155
Battery, Trouve.....(1) 155
Beans, sea..... 202
Bearings, limestone..... 201
Becquerel, obituary.....165, *361
Bed, Cate's spring ..... *328
Bed bugs and swallows ..... 354
Bee stings..... 275
Beeswax, extracting..... (39) 108
Beer, glycerine in..... 138
Beer, poisonous..... 182
Belcher springs..... 282
Belgium, our trade with ..... 395
"Bellophone"..... 52
Benzine, rectification..... 213
Bernard, obituary.....165, *307
Bevan's thermo-motor force .... 240
Bichromate of potash antiseptic. 154
Bicycle, mechanics of..... 304
Bicycle vs. pedestrianism ..... 116
Birds of paradise..... *351
Biscuit compass..... 101
Blackboard drawing ..... 32
Black cock and ptarmigan..... *151
Blacking, shoe .....(17) 27, (45) 300
Blast in cupola furnace .....(5) 235
Blast furnace, carbon effects.... 372
Blast, heavy ..... 319
Blast recorder ..... *130
Bleaching preparation.....(14) 331
Blood corpuscles, counting...114, 195
Blood disks, curious ..... *24
Blood, manganese in..... 298
Blood, moving bodies in life .... 167
Boat, collapsing..... *343
Boats, leaky.....(43) 300
Boat propelling device..... *166
Boilers, arching.....(50) 108
Boiler commission's report..... 178
Boiler connections.....(24) 235
Boiler corrosion..... 356
Boiler explosion, Magenta..... 233
Boiler explosions, mysterious ... 214
Boiler feeder, Rice's..... *6
Boiler feed heater..... *319
Boiler feed regulator..... *198
Boiler, Firmenich safety ..... *399
Boiler flues, corrugated..... *67
Boiler incrustations..... 81
Boiler insurance ..... *261
Boiler setting..... *393
Boilers, locomotive..... 186
Boilers, petroleum in.....(54) 188
Boiler plate, effect of heat..... 148
Boilers, rating..... 212
Boiler, rusting.....(8) 283
Boilers, water tube..... 101
Bolt cutter and nut tapper..... *54
Bolts, loosening..... 181
Bon ton game..... *114
Boots, waterproof.....(35) 27
Botanical notes..... 264
Botanical statistics..... 264
Boyton, Capt. Paul..... 216
Bradley "promethor"..... 49
Brain food..... 314
Brain of chimpanzee..... 218
Brain of pigeon removed..... 266
Brainerd, Prof., obituary..... 216
Brass, casting.....(10) 91
Brass wire, to anneal.....(25) 91
Brazil, emigration to..... 213
Brazil, trade with.....347, 354
Brazing band saws.....(24) 124
Breathing apparatus ..... *99
Brick incrustation..... 53, 298
Brick machines at Centennial.... 202
Brick machine, Brownhill's..... *211
Brick machine, Vanier's ..... *115
Bricklayers' strike..... 275
Bridge disaster, Tariffville..... 68
Bridge, Memphis..... 164
Bridge, Minneapolis suspension 81
Bridge, Nile..... *135
Bridge, proposed Thames..*329, *361
Bridge, East River....*207, *303, *306
Broadcloth, American..... 265
Bronze foundry, Japanese..... 355
Bronze powders.....(45) 28
Brown & Sharpe machine tools. *271
Brownian movement..... 354
Brush making..... *351
Bubble experiments..... 232
Buckboard wagon, Phillips'..... *166
Bug exterminator..... *278
Building, fireproof .....41, 42
Bullion product of 1877 ..... 97
Burns and scalds ..... 387
Butter, American, in England... 212
Butter aroma .....166, 177
Butter, rancid.....(38) 236
Butter, testing natural..... 326
Butterflies, migratory ..... *215

### C

Cabbage, self-fertilizing..... 313
Cable duplexed, direct ..... 388
Cable making, bridge.....*303, 306
Cactus, agave, etc..... *377
Cactus, cereus candicans..... *151
Cagots, the..... 169
Calendar and astronomy..... 202
California desert, irrigating ..... 84
Caliper making..... *85
Calorimeter, liquid..... *185
Canal, Rocky mountain..... 164
Canal boats, steam .....(29) 299
Candy, poisonous.....182, 305
Cannon primers, corroded..... 228
Caoutchouc tree..... *103
Cars, compressed air..... 181
Car, sailing..... *239
Car lighting..... 181
Cars, warming..... 223
Caries, dental..... 24
Carbolic acid on wounds..... 113
Carbon in chemistry..... 52
Carpets, American..... 395
Carpets, oil stains.....(27) 331
Carpets, sweeping .....(6) 107
Carpet weaving invention ..... 57
Cars, American street..... 393
Case hardening.....(75) 251
Cash recording machine..... *95
Caster, glass ball ..... *374
Castings, chilling.....(30) 76
Castings, protection.....293, 329
Cats, danger from..... 314
Catalpa ties ..... 266
Catalpa wood ..... 395
Caterpillars, protective mimicry. 313
Cattle lice.....58, (33) 107, 120, (4) 235
Cattle, Texan..... 345
Caventou, obituary ..... 68
Cellars, fruit..... 54
Cement, aquarium.....(10) 250
Cement, building .....1, (29) 236
Cement, china and glass.....(1) 51
Cement, diamond.....(8) 11
Cement for damp wood.....(6) 208
Cement, glass and metal.....(2) 123
Cement, hard rubber.....(21) 107
Cement, leather (12)..... 250
Cement for metals .....(36) 124
Cement, rubber .....(23) 139
Cement, Portland..... 258
Cement, rubber .....(15) 250
Cement, straw board.....(40) 28
Cement tester ..... *130
Cemetery tolling machine ..... 71
Centenarians, Algerian ..... 232
Central Park museum..... 239
Cereals, testing..... 299
Cereus candicans..... *151
Challenger expedition..... 297
Chelodine, long-necked..... 87
Chemical nomenclature..... 261
Chemical notes..... 154
Chemical prophecy..... 121
Chestnuts..... 184
Chimney, Hinckley's..... *210
Chimpanzees..... 325
Chimpanzee, brain of..... 218
China, famine in..... 145
Chinese famine, terror of..... 161
China to India..... 88
Chinese labor..... 340
Chloride of lime .....17, (46) 188
Chloroform ..... 378
Chlorophyl, origin ..... 264
Cholera and custard..... 328
Chuck, centering..... *210
Chuck, Cushman's..... *2 6
Chuck jaw, independent..... *194
Chuck, planer..... *245
Cider, keeping.....(46) 28, (24) 299
Cider mill, Sike's..... *86
Cigarette machine ..... *344
Cinchona..... *39
Cinders in the eye....216, 244, 292, (35) 300, 315
Cisterns, estimating capacity.(35) 219
Citrate of magnesia..... 218
Clam baker, Stroub's ..... *279
Clea ance and compression..... 337
Cleopatra's needle....25, 148, *199, *200
Cleopatra's needle, arrival in England..... 87
Cliff and cave dwellings..... 24
Clock, Ithaca calendar ..... *309
Clock, perpetual..... 360
Clothes moths..... 177
Coal cabinet, Hymer's..... *8
Coal dust explosions ..... 228
Coal dust fuel.....69, 116, 136
Cockroaches, to destroy .....(1) 171
Codling moth .....*103, 139
Coffee, Liberian..... 105
Coffee we drink..... 393
Coffins, Am. exports..... 168
Cogs, pitch line.....(11) 11
Coin tester..... *355
Coins, varnish for.....(16) 267
Collisions at sea, preventing . 32, 116
Color blindness..... (7) 203, 241
Color blindness in India..... 118
Color blindness and travel.....97, 148
Colors, harmless..... 117
Colors and sound..... 223
Color vision..... 162
Colorado mud volcanoes..... *34
Commerce, internal..... 338
Compass, biscuit ..... 101
Compass, influence of petroleum. 116
Compass, invention of .....(27) 283
Compass, magnetic.....(2) 107
Compositions..... 24
Comstock mines, lower levels.... 179
Compression and volume.....(24) 268
Concrete flooring..... *140
Condenser, Ransome's siphon... *150
Confectioners' colors.....(7) 75, 305
Congress, a patent mill..... 305
Congressional science expedition 161
Connally, T. C., obituary..... 260
Connecting rod, length of.....(12) 27
Consular trade reports..... 9
Contagion by mail..... 296
Convict competition..... 257
Cooking by solar heat..... *376
Copper wash.....(26) 11
Copperplating steel (41) ..... 124
Copyright congress ..... 262
Copying tracings..... 290
Corkwood, to bleach.....(2) 11
Corns..... 263
Corn, testing..... 289
Cornea, amyloid degeneration... 17
Cornetto..... 136
Corundum, Alabama..... 405
Cotton, Egyptian..... 197
Cotton harvester, Powell's..... * 86
Cotton seed hulls, non-conductor..... 187
Cotton in wool, testing..... 74
Cotton worm commission..... 164
Cosmical matter..... 281
Counter balancing engines...(12) 316
Counterfeit coin..... 368
Counterfeit trade dollars..... 319
Coupling, hose..... *182
Coupling, pipe..... *55
Coupling, thill..... *89
Cow stables, improved..... 112
Cow, Tenth Duchess of Geneva.. *55
Craniology and crime..... 54
Crank pin, truing a..... 36
Crayons, lithographic.....(21) 187
Cremation in Italy..... 1
Crushing mill, Alden's..... 54
Current wheel..... *41
Custard and cholera..... 328
Cut-off, best point.....(44) 12
Cutlery, American..... 340

### D

Dandruff.....(1) 27, (43) 188
Daubs, manufacture of..... 225
Deaf-mute telegrapher..... 103
Deepening without digging..... 178
Dentistry, home..... 136
Dental caries..... 24
Dental tool stocks..... *275
Desert, utilizing..... 175
Desert lands, raid on..... 84
Dextrin .....(17), 76, (46) 300
Diamonds, African..... 360
Diamond, valuation.....(24) 219
Diamond settings, platinum..... *217
Diamond tool dressing machine.. *5
Die, adjustable..... *54
Diet and drink..... 87
Digestion..... 218
Digging machine, Knight's..... *83
Disinfectant, hydrogen peroxide 99
Ditching machine, Snyder's..... *185
Divers' lamps..... *153
Docking attachment..... *182
Dogs, trained..... 161
Dosimeter, Colmer's..... *168
Dough mixing machine..... *56
Dovetailing machine..... *246
Drain pipe manufacture..... *31
Draught apparatus, stove..... *339
Draughtsman's stable..... *114
Drawing on blackboard..... 32
Dredger, Carr's ..... *390
Drill, quick speed..... *69
Drilling machine, radial..... *51
Drinking and smoking.....87, 97, 216
Drying lumber..... *114
Dualin..... 58
Dyeing felt hats..... 24
Dye, black.....(36) 11, (28) 27
Dye, blue for woolen.....(39) 11
Dynamite.....58, (17) 250
Dynamometer..... *130

### E

Earthquakes, American ..... 56
Earthquakes of Japan..... 343
Ears, water in..... 342
Easel for pottery decoration..... *183
Ebonizing wood. 191, (19) 219, (67) 251
Education, National Association 9
Education, physical..... 153
Education, technical..... 2, 100
Eels attacking shad..... 367
Egg boiler..... *354
Egg within an egg..... 340
Eggs, mushrooms for..... 147
Eggs and organisms..... 17
Eggs, preserving .....(13) 11
Eight hours a day..... 2 8
Electric engraving on glass..... 114
Electric light...21, 34, *168, 327, (2) 203
Electric light in photography..... 97
Electric rheostat..... *169
Electric submarine lamp..... *153
Electrical experiments..... 388
Electricity and gravitation..148, 212
Electricity, terrestrial..... 132
Electricity, velocity of..... (17) 124
Electricity, has it weight?..... 229
Electroscope, simple..... 183
Electroscope, telephone an..... 209
Electro-striction..... 120
Electrotype, largest..... 338
Element, new.....3, 354
Elevated railway, New York..*18, *19, *63, *66, *175, 225, 315, *367, *370, 384, 392
Elevated railway map, N. Y..... *20
Ellipse, planetary .....(40) 108
Emery wheels, composition....(9) 139
Emery wheel manufacture..*255, 258
Emery wheels, speed of.....(28) 60
Emery wheels, truing.....(35) 44
Enamel, black ..... 44
Engine, atmospheric..... *131
Engine, Baxter portable..... *70
Engine, Buckeye..... *310
Engine break down..... *323
Engines, compressed air..... 278
Engine, Eclipse..... *214
Engine economy, marine..... 194
Engine, Lovegrove's, 2 H. P..... *34
Engine, Otto gas..... *195
Engine, Peerless portable..... *191
Engine, Roberts'..... *342
Engine and shears, Laws'..... *134
Engines, Safety Steam Co..... *371
Engines, steam fire..... 345
Engines, Steamer Grangemouth.*259
Engine, Talley's hydraulic..... *150
Engine, Worthington's pumping. *179
Engineering education..... 2
Engineering progress..... 57
Engineering trade, Granville on. 261
Engineers, Am. Society..... 369
Engraving, frosted.....(31) 27
Engraving on glass.....(1) 11, 114, 135
Epsom salts and oxalic acid..... 214
Equibus..... *265
Etching on glass.....(6) 316
Etching on zinc.....(3) 219
Ether.....(20) 250
Eurydice, capsize..... 223
Every man his Keely motor..... 240
Evolution, Prof. Newberry..... 70
Excavator, Reeves'..... *8
Expedition, American Science.... 6
Expedition, Bennett's Arctic.... 179
Expedition, the Woodruff..... 160
Exhibition, Australian..... 183
Explosions, coal dust..... 228
Explosion, curious..... 162
Explosions, flour mill..... 282
Explosion, Magenta..... 233
Explosions in mines..... 196
Explosions, mysterious..... 65
Explosive dust..... 200
Explosives, new.....58, 210, 312
Exposition for the boys..... 88
Exports, American.....321, 352
Exterminating wild beasts..... 197
Eye, chip drawn by magnet..... 275
Eye, cinders in .....216, 244, 292, 315
Eyes of reptiles and fishes.....*184

### F

Factories, friction and singeing. 67
Famine in China.....145, 161
Feather shavings, cutting..... *50
Feed, star..... *213
Feed water heaters.*47, 118, *243, *319
Feed water regulator..... *198
Felt hats, dyeing..... 24
Fence economy..... 395
Fibers, testing..... 74
Fibrin..... 391
Files, to clean.....(11) 27
File guide..... *6
File sharpening by sand blast.... *406
Filters.....65, 229. (10), 299, (10) 331
Financial stupidity..... 183
Fires, annual loss..... 41
Fire, curious..... 95
Fire engines, steam ..... 345
Fire escape..... *147
Fire telegraphs..... *402
Fires on shipboard..... 101
Fireproof linen.....(22) 139
Firework making..... *373
Fish, armor plated..... 118
Fish commission, operations..... 340
Fish culture....41, 52, 87, 136, 199, 292, 361
Fish teeth, hinged..... 145
Fish eyes..... *18 4
Fish propagation, accidental .... 260
Fisheries, yield of..... 177
Flax industry..... 400
Flies, protection against.....(11) 11
Floor, polishing.....(19) 250
Floor wax.....(56) 188
Flour by mail..... 164
Flour mill explosions..... 282
Flour, new process..... 362
Flowers, luminous..... 260
Flues, corrugated boiler..... *67
Fluid measure..... *168
Fluorspar, photo-electricity of .. 72
Flying machine, new ..... 405
Fog whistle, Bristol..... 3
Foods, albuminoids in..... 105
Food adulteration..... 257
Force, new solar..... 312
Force, Stoney's..... 101
Forestry.....9, 52, 198
Forge, Buffalo..... *854
Forgetfulness, mechan'l theory.16, 68
Formic acid..... 154
Fossils, large.....38, *375
Foundry economy..... *138
Foundry, Japanese..... 355
Fountain, hot water..... 47
Fountain, Prospect Park..... *215
Fowl monstrosity..... *89
France and steam power..... 118
Franklin, Sir John..... 319
Freezing compound.....(17) 107
Friction, effect of ..... 209
Fries, obituary..... 243
Fruit cellars ..... 54
Fuchsias.....(27) 91
Fuel, artificial..... 369
Fuel, coal dust..... 69, 116
Fulling mill, Baldwin's..... *38
Fungi.....122, 314
Furnace gases, analysis ..... 152
Furnace, hot air..... *590
Furnace, Jarvis'..... 186
Furnace, puddling..... *35
Furnace, simple..... 404
Furniture, Am. exports..... 168
Furniture caster, Konz'.....*6, *374

### G

Gallium.....219, 246
Galvanic battery, Byrne's....228, *293
Galvanic element, new..... 315
Gardening in France..... 264
Gas, cheap heating..... 330
Gases, furnace..... 152
Gas lighting by electricity..(24) 43, *137
Gas motors.....*195, 556
Gas, using natural..... 52
Gases, liquefaction of.64, *71, *73, *111, *147, 186
Gas poisoning..... 21
Gas traps.....*105, *243, *281, *291
Gate, Cooksey's farm..... *326
Gatling gun aloft..... *227
Gear cutting machine ..... *271
Gear dressing machine..... *409
Gear instrument, Stolp's..... *22
Gear wheel teeth.....36, *149
Gelatin for moulding .....(9) 331
Geographical progress..... 160
Gilbert railway .....*63, *66, *175, 315
Girls, physical education..... 153
Glacial movement..... 328
Glass, to clean..... 166
Glass, engraving on.....114, 135
Glass, iridescent .....23, 134
Glass, muslin, in colors..... 7
Glass making at Pittsburg..... 395
Glass, soluble.....(8) 59
Glass, toughened.....119, 199, 240
Glauconite..... 3
Glove cleaner..... 216
Glucinium..... 312
Glue for damp wood.....(6) 208
Glue manufacture..... 168
Glue, marine .....(45) 28
Gold, dissemination..... 315
Gold lace..... 309
Gold mines, North Carolina..... 212
Gold ores, working..... 176
Gold, silver, etc., yield in 1877.... 97
Goose quill, utilizations of....*50, 51
Government scientific work..... 33
Governor, marine engine..... *88
Grain toller, Vitts'..... *118
Grape culture..... 311
Grasshopper commission..... 164
Gravitation and electricity..148, 212
Gravity indicator..... 231
Gravity a mode of motion..... *80
Great Eastern..... 264
Grinding machine..... *371
Grinding mill, Baugh's..... *115
Grinding mill, Phillips'..... *328
Grindstone trough..... *271
Grindstone truing device..... *274
Guns, firing under water..... 374
Guns, magazine, testing....21, 48, 266
Gunpowder and nitro-glycerine.. 168
Gyroscope, electrical..... *335

### H

Hail, iron..... 223
Hair dye.....(19) 107, (13) 123
Hair, gray .....(12) 283
Hair oil.....(48) 28
Hair, to remove .....(8) 107
Hair hygrometer ..... 227
Halibut and salmon..... 266
Hanger, adjustable swivel..... *98
Hares, Siberian ..... 232
Harrow, Dobbin's..... *199
Hartt, Prof., obituary..... 279
Hat conformator diagrams..*143, 146
Hat, yielding..... *407
Hay fever..... 25
Health and temperature..... 161
Heat and muscular energy..... 266


© 1878 SCIENTIFIC AMERICAN, INC

Heater for baths.....*40
Heaters, feed water.....*47, *319
Heela, eruption.....*345
Helioscope.....*163, 186, 260
Heller's tricks.....129
Helminthology for 1877.....121
Hemlock leaf veins.....378
Henry, Prof., obituary.....336
Herald weather reports.....177
Hickory, worms in.....(12) 75
Hogs for England, live.....390
Hoisting machine, Johnson's.....*102
Hoisting machine, Mason's.....*223
Homeopathic insurance.....200
Homesickness.....266
Honey bee ship.....333
Horn bug.....*249
Horned tragopan.....*119
Horses, American, in England.....281
Horses, feeding.....34
Horse power.....(47) 108, (8) 219, 281
Horses, trained.....161
Hose, bursting.....307
Hose coupling.....*182
Hotel, Women's.....209
Howgate expedition..112, 181, 192, 276
Humanity, cubic mile of.....227
Hydraulic engine, Talley's.....*150
Hydraulic experiments, curious..2
Hydraulic mining in Cal.....*274, 275
Hydraulic ram, Millington's.....*166
Hydrobromic acid.....282
Hydrogen, Giffard's apparatus..*104
Hydrogen and oxygen, compressing.....*73
Hydro-pneumatic accumulator..*127

I

Ice cream beater.....*102
Ice machine, Holden.....*159
Ice machine, ether.....*387
Impression paper.....(14) 27
India and China.....88
India rubber tree.....*108
Indigo, testing.....(29) 11, 74, 280
Industries, new.....386
Industrial paradox.....401
Influenza.....274
Injector, Eclipse.....*290
Injector, the.....(30) 43, *325
Inks, aniline.....(24) 76
Ink, black.....(18) 219
Ink, copying.....(14) 75, (4) 250, 324
Inks, gold and colored.....(35) 11, (2) (4) 250, (60) 251
Ink, India.....(10) 75
Ink, indestructible.(9) 75, 96, (37) 236
Ink, marking.....(2) 43
Inks that will not mould.....(5) 76
Ink, to restore faded.....(49) 251
Ink, shoemakers'.....(4) 316
Ink stains.....(24) 155, (18) 250, (39) 300
Ink for stamps.....(37) 107
Ink, sympathetic.....(35) 251
Insane, music for.....144, 200
Insanity in London.....145
Insect instinct, curious.....166
Insect powder blower.....*278
Insects, preserving.....(40) 11
Insect stings.....308
Insurance, homeopathic.....200
Intermarriage of relatives.....101
Invention, conditions of.....133
Invention, to encourage.....192
Invention, illustrating.....241
Invention, a means of culture.....144
Invention, story of an.....57
Inventions, confiscating.....160
Inventions, history wanted.....145
Inventions and labor.....336
Inventors, injustice to.....282
Inventors, American.....363
Inventors, meddlesome.....337
Inventors' rights.....208, 304
Inventors, work for.....176
Iodous acid.....154
Iron and steel market, to make..393
Iron commission, Belgian.....180
Iron, Lake Superior.....242
Iron in Syria.....311
Iron, hail.....223
Iron industry, our.....404
Iron trade, our.....393
Ironclad, decline of.....273
Ironclad, Turkish.....*119
Irradiation.....326
Isinglass.....177, (51) 220
Is there a hole through Mercury?..392

J

Jacks, wagon.....*297, *355
Japanning.....(30) 11, (3) 27, (18) 107
Japanese habits.....179
Japanese textile fabrics.....211
Jelly fish.....314
Joint, wiped.....(40) 91
Journal bearings.....(36) 204
Jugglery, scientific.....129
Jute, new utilization.....8
Jute culture in South.....297

K

Kaga ware.....339
Kangaroo hides.....175
Kangaroo invasion.....166
Keely motor.....277
Keely motor, every man his.....240
Keely's rival.....49
Keely seance.....401
Keramics and woman's work.....224
Kergaredec, obituary.....71
Kerosene, dangerous.....199
Kerosene stove regulator.....*326
Kneading machine, Boland's.....*56
Knife grinder.....*371
Knit goods, American.....340
Knots, spiritual.....*321
Krupp's works.....281

L

Labor and machinery.....329
Lacquer, gold.....(25) 299
Lacquer for brass.....(39) 44
Lacquer for cast iron.....(34) 27
Ladle, Fawcett's.....*70
Lake, boiling.....*279
Lake Superior, tide of.....180
Lamp burner.....*355
Lamp, nursery.....325
Lamy, obituary.....298
Lard, to clarify.....(13) 331
Laryngostroboscopy.....339
Larynx, mechanical.....*136
Lathe centers.....(19) 60
Lathe chuck, Cushman's.....*2.6
Lathe chuck, centering.....*210
Lathe chuck jaw.....*194
Lathe, correcting.....*373
Launch, Barrancas.....*371
Launch, Russian torpedo.....*338
Lava, hydrocarbon oils in.....183
Law, stick to the.....80
Lawn mower, Philadelphia.....*249
Lead from dross.....(21) 60
Lead from smoke.....261
Lead poison.....346
Lead poisoning.....403
Lead tree.....(65) 251
Leaf photographs.....(29) 171
Leather, American, in Europe..391
Leather, shoddy.....266
Leather waste, utilizing.....(22) 250
Leather, water-proofing.....(10) 13
Leech barometer.....213
Lemon sirup.....(19) 316
Leper, governor, death of.....116
Letter stamp, origin.....68
Lice on cattle.58, (33) 107, 120, (4) 2.5
Liebig monument.....8
Life of a million people.....168
Life, what is.....272
Lights, colored.....(9) 123
Light, sterilization by.....257
Lighthouse board.....369
Lightning and plants.....315
Lily, two flowers from one stalk..55
Lime light, new.....58
Limestone, origin.....147
Limestone, bearings.....202
Limnoria and teredo.....*73
Linseed oil, tests.....(64) 251
Lion's teeth, claws, etc.....*185
Liquefaction of gases.....64, *73, *111, *147, 186
Literary congress at Paris.....262
Lithographic crayons.....(21) 187
Locomotive, Am. at Paris.....116
Locomotive boilers.....186
Locomotive building, rapid.....6, 228
Locomotives, English.....226
Locomotive power.....(11) 43
Locomotives for Russia.....8
Locomotive strokes.*148, 19, 228, 244
Locomotive valves, setting.....(24) 250
Locomotive works, extensive.....182
Locomotive, year's run.....362
Locomotive exhaust.....*98, *262
Lubbock, Sir John.....209
Lubricator for belts.....185
Lubricators.....*3, 209, *290
Lumber drying.....*114
Lumber product.....153
Lumber, seasoning.....(35) 204

M

Machine tools, Brown & Sharpe.*271
Machinery, coating for.....(47) 188
Machinery and labor.....329, 336
Magnesia light.....(6) 250
Magnetic experiments.....388
Magnetic variation...(10) 107, (2) 299
Magnets, best steel for.....(3) 283
Magnet, Jamin.....*312
Magnet, strong...(24) 283, (28) 299, *312, (5) 331
Magnets, floating.....288
Magnetism, terrestrial.....132
Magnetizing.....(52) 12
Magnetization of circular plates..167
Magnetizing small bars.....(28) 140
Mail of the metropolis.....81
Mailing samples.....84, 164
Malaria and sunflower.....90
Malt dust explosive.....200
Man in nature.....212
Manganese in blood.....298
Mansillian science.....231
Manufactures, American.....341
Mapping, new method.....56
Marble, filling cracks.....(78) 251
Marble, iron rust.....(21) 331
Marble, stains.....(43) 251
Marksmanship, remarkable.....33
Marine engines.....*259
Marine engine economy.....194
Marmoset, silky.....*7
Marriage of relatives.....
Mars.....97, 101
Mars' moons.....297
Masonry and waves.....263
Mayer, obituary.....298
Meat for Europe.....358
Meat, preserving.....(49) 12
Meddlers, unskilled.....337
Medical profession crowded.....99
Medical progress in 1877.....81
Meerschaum.....(1) 267
Megapod at Central Park.....378
Mercer, Dr., obituary.....2 6
Mercury, transit.....215, 276, 322, *347
Meridian circle at Paris.....18, 4
Metals, expansion by heat.....(25) 296
Metals, hardness.....(27) 299
Metals, tests at navy yards.....132
Metals, transparency.....298
Meteors.....36, 116, 148, 281
Meteor, Virginia.....6, 137
Metric system.....41, 328
Mica.....(51) 220
Mica ventilators.....195
Microphone.....404
Microphone, alleged piracy.....388
Microscope, medical use.....308
Microscope mounting.....(28) 187, (45) 188, 196
Microscope, water lens.....*258
Microscopic masons.....33
Microscopical postal club.....186
Microscopical society, N. Y.....258
Microscopical notes..107, 195, 222, 308
Microscopy.....*389
Micro-tasimeter, Edison's.....*385
Middling purifier case.....17
Milk, new tests for.....40
Milk, setting.....185
Milk snake and spider.....231
Milkweed for wounds.....354
Mill, Baugh's sectional.....*115
Mill, cider.....*86
Mill, influence of one.....395
Mill, Phillips.....*323
Mill picks, tempering.....(31) 76
Mill stone dressing machine.....*5
Mind, muscle, machinery.....400
Mine explosions.....196
Mines, lower levels.....179
Mines, Mass., silver.....369
Mineral negatives.....56
Mineral spring, Russell.....8
Mineral wool, plant for.....*20
Mineral wool roofing.....*278
Miners' inch.....(26) 250
Mining, hydraulic.....*274, 275
Mint for Honduras.....339
Mirror, to make.....(21) 250
Mississippi jetties.9, 21, 34, 48, 212, 292, 305, 347
Models, restoring patent.....113
Molecules, size.....298
Monsters, artificial.....*312
Monstrosity, fowl.....89
Moon and gravity.....(13) 107
Moon, apparent size.....*89
Moon, painting of.....357
Moon rising in west.....176
Mosquitoes.....122
Mosquito net frame.....*389
Moths, clothes.....177, (68) 251
Moths, habits of.....33
Mother-of-pearl imitation.....117
Motion, perpetual.....*346
Motor, combustible dust.....244
Motors, gas.....356
Motor, Keely.....277
Moulds, foundry.....*133
Moulding machine.....*282
Mouth shut.....278
Mower, Philadelphia.....*249
Muc lage.....(42) 220
Mud volcanoes, Colorado.....*34
Mulberry juice.....114
Muscarin.....346
Muscular power.....180
Muscular energy and heat.....266
Museum, Central Park.....3, 239
Museum of trade patterns.....245
Mushrooms for eggs.....147
Music for insane.....200
Musical instruments, nickel plating.....(23) 76, (27) 139
Musket, African.....154
Mussels, silk from.....314
Myxomycetes of U. S.....308

N

Nails, driving.....(13) 316
Names, too many.....309
Napkin rest.....325
Natural history notes.....313, 378
Natural history collection.....32
Natural history museum, N. Y.....3
Naturalist, Agricultural dep't.....276
Naval necessities.....323
Navigation, decline of American..292
Navy, the U. S.....52
Navy yard iron works.....164
Navy yard metals.....132
Needle and thread cutter.....*404
Negatives, mineral.....56
Neptune's satellite.....104
New York city, work for.....395
Nutlock, Cushing's.....*244
Nuts loosening.....1 81
Nature, study of.....147
Nickel, price of.....149
Nickel plating.....(23) 76, (27) 139, 209, (6) 219, (14) 250, (56) 251, (61) 251
Nile.....217
Nitroglycerin.....58, 138, 168, 210
Nitroglycerin compound, new.....210
Nitroglycerin and gunpowder.....168
Nordenskold expedition.....133
Northeast passage.....234
Nozzle, locomotive exhaust.....191

O

Oaks of U. S.....314
Obelisk, Cleopatra..87, 148, *199, *200
OBITUARY:
Becquerel, Antoine Cæsar.165, *361
Bernard, Claude.....165, *301
Brainerd, Prof.....216
Caventou.....68
Connally, Thos. C.....260
Fries, Elias Magnus.....243
Hartt, Prof. Chas. F.....279
Henry, Prof. Joseph.....336
Kergaredec.....71
Lamy, Auguste.....291
Mayer, J. R. V.....2 1
Mercer, Dr.....216
Orton, Wm.....309
Ragsdale, Gov.....116
Regnault, Victor.....165, 329
Ruhmkorff, Heinrich Daniel.....81
Secchi, Pietro Angelo.....165
Victor Emanuel.....122
Observatory, national.....84, 113
Observatory, Paris.....1, 4
Ocean phenomena.....194
Oculists, mechanical.....
Oil fuel.....81
Oil pipe lines.....33, 52
Oil sands of Pa.....280
Oil stains on carpets.....(29) 107
Oil stove regulator.....*326
Old Colony accident.....*322
Oleomargarine.....326, 374
Olive as an American product.....389
Olive oil soap.....392
Opium.....346
Optical experiments.....*129
Orang-outang.....325
Orchid, beautiful.....*7
Ore crusher, Alden's.....54
Ores, working.....176, 260
Organ, Cincinnati.....324
Organisms and eggs.....17
Organograph.....*377
Orgrapn.....103
Oroheliograph.....40, *116
Ostrich farming.....*294
Orton, Wm., obituary.....309
Our exports.....389
Owl, imprisoned.....378
Oxen, strength of.....(23) 219
Oxalic acid and epsom salts.....214
Oxygen, action of compressed...1 8
Oxygen, volume of liquid.....121
Oxygen, to procure.....(5) 107
Oxygen, liquefying..*11, *78, 147, 186
Oxyhydrogen light.....(6) 250
Oyster, the American.....378
Oysters, purple.....314
Ozone.....(9) 250, 274, (20) 331, 388
Ozone machine.....276

P

Paint, blistering.....(48) 12
Paint, cheap marking.....(17) 331
Paint for roofs, etc.....(27) 11, (33) 140
Paintings, factory.....225
Palace Stock Car Co.....153
Palm, doum.....*407
Palmyra palm.....*167
Papaw.....264
Paper exhibition, Berlin.....162, 340
Paper, explosive.....(8) 123
Paper, magic.....(41) 44
Paper and wire tester.....*69
Papier mache.....(2) 75
Parallax, solar.....186
Parasols, teasel.....148
Pariahs, race of.....169
Paris Academy prizes.....184
PARIS EXHIBITION:
Algerian palace.....*281
Am. agricultural exhibit..21, 164
American exhibit.....2, 49
Balloon, Giffard's.....315
British India section.....*311
Buildings.....*22
Canadian trophy.....*307
International avenue.....*388
Letters from.....344
Locomotive model.....116
Norwegian exhibit.....90
Opening.....315
Trocadero building.....*58
Vestibule main building.....
Paris green.....(38) 188
Parks as garden schools.....208
Park, national.....39, 100
Paste.....90, (22) 124, (36) 251, (1) 331
Pasture, long way to.....370
Patent attorneys.....276
Patent court, proposed.....96, 212
Patent decisions.....9, 17, 21, 65, 84, 202, 213, 217, 362, 372, 407
Patent law amendments.....9, 21, 100, 164, 180, 224, 282, 288, 304, 305, 324, 337, 362, 372
Patent law, U. S. vs. State.....100
Patent matters in Congress.....9
Patent medicines.....213
Patent mill, Congress a.....305
Patent models, restoring.113, 129, 164, 177
Patent No. 200,000.....132
Patent office business.....100
Patent office employes as attorneys.....81
Patent office employes discharged..212
Patent office examiners, death of.....216, 260
Patent office gazette.....84
Patent office printing.....276
Patent office progress.....241
Patent office salaries.....340
Patent rights.....64
Patent rights, bastard.....329
Patent rights, notes for.....191
Patent specifications.....80, 84
Patent system, history.....145
Patent system, U. S.....192
Patent system, Swiss testimony..357
Patents, effect on prices.....272
Patents, confiscating.....160
Patents, cheap, good work from..385
Patents, English.....119
Patents, commissioner's annual report.....96
Patents, delay.....273, 292
Patents issued in 1877.....52
Patents and labor.....336
Patents, models for.....113
Patents, opposition to.....128
Patents, printing.....113
Pattern museum.....245
Patterns, registering.....292, 329
Pattern work economy.....*133
Pavement, asphaltic wood..370
Payki Shereef, the.....*119
Peat products.....327
Pedestrianism, 2,000 miles 1,000 hours.....151
Pencils, charcoal.....326
Pendulum Zollner's horizontal...*79
Pepsin, to make.....53
Perpetual motion.....*346
Peroxide of hydrogen.....99
Perspiration, indication.....104
Petrified wood.....(42) 12
Petroleum discoveries.....120, 198
Petroleum, divining.....
Petroleum exports.....357
Petroleum, influence on compass..116
Petroleum sands of Pa.....280
Petroleum tanks.....315
Phonograph, Edison's.....*193
Phonograph, musical.....405
Phonograph on exhibition.....86
Phonograph in medicine.....308
Phonograph, reversed....., 296
Phonograph, success of.....8
Phonograph wins a victory.....384
Phosphorus brain food.....314
Photos in colors.....309
Photo-electricity of fluorspar.....72
Photo hash.....90
Photo-negative glass, to clean.....90
Photo plates, Newton.....390
Photo-printing.....26, 117
Photographs from balloon.....291
Photographs, to color.....315
Photographs of leaves.....(29) 171
Photographs, stearine 133, (34) 300
Photographic negatives, mineral..56
Photographic floating tray.....90
Photography, astronomical.....197
Photography, electric light in.....97
Photography, saving gold and silver.....91
Photography, scientific applications.....225
Phylloxera.....138, 230
Physicians, female.....121
Pianos, iron frame.....354
Piano making.....3 28
Pigeon, living without brain.....266
Pigs, solid hoofed.....378
Piles in sand, driving.....2 2, 340, 388
Pineapple tree, the Bahama.....391
Pine, Pyrenean.....*230
Pipe coupling, Chapell's.....*55
Pipe manufacture.....*31
Pipes, sympathetic.....260
Pipe threads, English.....277
Pipe tongs.....*264, *281
Pirani's experiment, gravity and electricity.....81
Plane, Boyce's.....*191
Planer, double surfacing.....*297
Planets, new.....52, 261
Planetary population.....346
Planetary rings.....369
Plant blights.....*389
Plant crystals.....309
Plant cultivation, hints.....*229, 234, 253
Plant mind.....196, *216, *233, 260, 296, *377, 393
Plant, sensitive.....*377
Plants, absorption & evaporation..198
Plants, circulation.....280
Plants, dreaming of.....314
Plants, effect on air.....313
Plants, insect-eating.....147
Plants, poisonous.....409
Platinum tipped settings.....*217
Plow, gang.....*409
Plumbing and sewer gas.....330
Pneumatic accumulator.....*127
Pneumatic dispatch, Berlin.....18
Poisons.....185, 257, 346
Polariscope as a photometer.....260
Polarizing helioscope....*163, 186, 260
Polyporic acid.....154
Porcelain, Kaga.....339
Port wine marks.....276
Portraits, composite.....389
Post Office, New York.....81
Postal card, double.....87, 307
Postal certificates.....53
Postal service improvement.....192
Postage stamp, origin.....58
Potato disease.....165
Pottery decoration.....224
Prairie chickens in California.....134
Practical mechanism.....*36, *149
Prairie dog and guests.....*375
Prejudice, official.....407
Press, cider.....*86
Pressure and life.....*121
Pressure regulator.....*326
Prices and production.....248
Printing process, blue.....40
Printer's rollers.....(6) 27, (57) 108
Problem, the rail.....100, *129
Progress in hard times.....395
Propeller, Curtis'.....*182
Propellers, raising and lowering..*130
Propeller, steering.....*306
Protractor.....*245
Ptarmigan and black cock.....*151
Puddling furnace, Godfrey & Howson.....*35
Pulleys, wooden.....116
Pulley belt lubricator.....185
Pulley belts, shipping.....(43) 124
Pulse glass.....(38) 251
Pump, Acme steam.....*152
Pump, novel chain.....*393
Pump, National steam.....*162
Pump, rotary force.....*358
Pumps, steam siphon.....*25
Pump, Worthington's steam.....*179
Pumping engine, centrifugal.....*246
Pumping engine, Rider's.....*131
Punching and shearing machine..*163
Pyrometers.....(15) 187

Q

Quarantine act.....289
Question, a three-sided.....64

R

Radial drilling machine.....*51
Radiometer, Crookes's.....48
Ragsdale, Gov., obituary.....116
Rail puzzle.....100, *129
Rails, progress in making steel...390
Railway car lighting.....181
Railway cars, warming.....223
Railway, flexible wheel base..*226, 292
Railway, Liberian.....121
Railway, narrow gauge...119, 340, 396
Railways, Northwestern.....276
Railways, N. Y. elevated.....*367, 370
Railway, one rail.....24
Railway passenger car, cost of...53
Railway sailing car.....*239
Railway, street, compressed air..278
Railway Stock Car Co.....153
Railway ties, catalpa.....266
Railway ties, creosoting.....201
Railway time.....52
Railway trucks and axles...*226, 292
Rain tree.....264, 313
Ram, Millington's hydraulic.....*166
Rakes, American in England.....387
Ramie fiber machine.....*72
Razor grinding machinery.....358
Razor strop paste.....(25) 43
Reapers and mowers at Paris ex..384
Recording machine, cash.....*95
Reef, Alacrane.....297
Regnault, obituary.....165, *329
Reins, bearing.....152
Reptiles' eyes.....*184
Reptiles, gigantic.....26
Relatives, intermarriage.....101
Reservoir recorder.....*130
Resin, bleaching.....(45) 11
Respiration at high altitudes.....342
Respirators and aerophores.....*99
Reventse stamps.....292
Rheostat, Plante's.....*169
Rheumatism and electricity..(42) 300
Rhine, impurities of.....81
Riding taught by machine.....264
Rifle firing, vertical.....343
Rifling machine.....*4
Rings, vortex.....276
River improvement...113, 247, 292, 305
River reversed.....385
Rocket, illuminating.....72
Rolls for beams.....312
Roofing, mineral wool.....*278
Rooster, a $502.....33
Rouquayrol's apparatus.....*99
Rubber, dissolving....(45) 28, (63) 251
Rubber tree.....*103
Rubies, artificial.....2, 47
Rudder screw, Kunstadter.....*306
Ruhmkorff, obituary.....81
Russell mineral spring.....3
Rust, preventing.....(38) 11, (28) 76

S

Saccharometer, Bottone's.....*181
Saccharometer, Laurent.....*408
Safe, Marvin's.....*82
Safety valve.....*3 41
Sahara, flooding the.....47
Sailing car.....*239
Salmon, Am., in New Zealand..87
Salmon disease.....312
Salmon stocking, accidental.....260
Salt mining, hydraulic.....346
Salt river.....248, 327
Salt of the sea.....297
Samples by mail.....84, 164
Sand foundations.....20
Sand glass, alarm.....*354
Sand pump, Reeve's.....*8
Sapphires an rubies, artificial...2
Satellites, the.....53
Saw blade, band.....*266
Saw file guide, Roth's.....*6
Saw mill dog.....*198
Saw mill head block.....*291
Saw, Stafford scroll.....*217
Scale, removing.....(22) 219
School at Kolapore.....*87
School twang.....276
Science Association, Am.....354
Science and commerce peacemakers.....256
Science, teaching.....289
SCIENTIFIC AMERICAN, Export Edition.....321, 352
SCIENTIFIC AMERICAN, press opinion.....85, 138
Scientific progress.....234
Screw, steering.....*306
Screw threads, metric.....(22) 43
Scroll saw, Stafford.....*217
Scrubbing machine, Stockley's..*230
Sea beans.....201
Sea, harvest of.....177
Sea salt.....297
Sea, temperature.....194
Sea water as a beverage.....242
Seal, habits.....378
Secchi, obituary.....165
Seed adulteration.....88
Serpents at dinner.....*167
Serpents' fangs.....*327
Settings for diamonds.....*217
Sewage utilization.....137
Sewer gas checks.....*105, *243, *281, *291, 330
Sewing machine oil.....(14) 60
Shad, the first.....216
Shaping machine, Manville's..*358
Shears and engine, Laws'.....134
Shears for marking stock.....*406
Shearing and punching machine..*163
Shipbuilding in Maine.....33
Ship building, promoting.....132
Ships, rubber bottoms for.....54
Ships, unsinkable.....384
Shipwrecks, Atlantic.....194
Shoe brush, improved.....*387
Shoemakers' ink.....(4) 316
Shoe polish... (10) 60, (49) 220, (45) 300
Shooting stars.....281
Shop clock.....97
Shower bath.....*179
Short-horned cow.....*55
Shutter, paper.....*211
Sick, discomforts of.....232
Sifter, ash.....*338
Silk and wool, testing.....74
Silk culture in America.....*391
Silk deception.....320
Silk product and imports.....338
Silk worms.....340
Silver in art.....369
Silver mines, Mass.....368
Silver ores, working.....176
Simian visitors.....325
Siphon pumps, steam.....*25
Skeletonizing leaves.....(2) 171
Smoke rings.....276
Sled, Graether's.....*355
Sled, steam.....18
Slotting machine.....*242
Small-pox and turpentine.....399
Smoking and artificial teeth.....7
Smoke and drink.....97
Prairie chickens in California.....134
Smoking at work.....166
Snake cannibalism.....226
Snake poison.....313
Soap, adulteration of.....390
Soap bubble experiments.....69, 232, (24) 333
Soap, phosphate of soda.....20
Solar cooking apparatus.....1, *376
Solar steam power.....291
Solar force, new.....312
Sound colors.....223
Sound waves, visible.....120
Sounding apparatus.....297
Sounding, South Atlantic.....355
South, a field for manufactures..395
Southern spirit, right sort.....328
Speech, reversed.....296
Sperm oil, to purify.....(14) 60
Spheres, turning.....*376
Spider engineering.....*231
Spiders' webs.....278
Spiral grooving machine.....*4
Spirit strings, morbid minds.....*321
Sponges, cleaning and bleaching.....(20) 43, (28) 107, (12) 299
Sponge trade.....344
Spontaneous generation.....186
Springs, Belcher.....282
Springs, tempering.....(29) 76, (14) 123, (42) 124
Spring for vehicles, wooden.....*103
Stammering on purpose.....358
Stamp, hand.....(18) 123
Stamp, postage, origin.....58
Stamps, revenue.....292
Stanley's African discoveries.....276
Star feed.....*213
Star finder.....243
Starlight, measuring.....298
Statistics, life, occupation, etc..168
Steam boiler commission.....178
Steam boiler insurance.....*261
Steam boilers, rating.....212
Steam clearance and compression..337
Steam engine, Baxter.....*70
Steam engine, Buckeye.....*310
Steam engine, early history.....210
Steam engine, Eclipse.....*214
Steam engine, Lovegrove's.....*34
Steam engine, Peerless.....*191
Steam engine, Roberts'.....*342
Steam engines, Safety Power Co.*371
Steam engineering, promoting..132
Steam fire engines.....345
Steam generator, novel.....*40
Steam generator, Stead's.....*243
Steam navigation progress.....154
Steam paradoxes.....112
Steam power in France.....113
Steam power, solar.....201
Steam pressure regulator.....*326
Steam pressure and temperature..36
Steam, using superheated.....*118
Steam vs. water power.....58, 101
Steam, weight of.....326
Steamboat inspectors.....100, 180
Steamers, Atlantic.....154, 180
Steamer Britannic.....194
Steamer Grangemouth engines..*259
Steamer Great Eastern.....264
Steamer Old Colony accident....*323
Steamers, steering screw.....232, 276
Steamer, twin.....247
Steamers, small.....3, (8) 235, 266, 258, *371
Stearine pictures.....133
Steel, rolling hot.....308
Steel and frost.....(31) 251
Steel exhibits.....346
Stereopticon slides.....99
Sterilization by light.....277
Stewart on advertising.....314
Stick to the law.....80
Stilt, Shute's.....*309
Strings of bees.....275
Stock Car Co.....153
Stoney's force.....101
Stopper for basins, Carnes'.....*70
Storm signal, new.....52
Stove draught apparatus.....*339
Stovepipe expander.....*134
Stovepipe point, Draper's.....*6
Stovepipe, leaky.....(8) 75, (54) 220
Stove polish.....(26) 27
Stove wick regulator.....*326
Strings of insects.....275, 308
Strike, bricklayers'.....275
Strikes, English.....372
Strychnine.....346
Study and laziness.....249
Stupidity, repeating.....188
Stuttering, treatment.....346
Submarine cables, how destroyed *73
Submarine illumination.....*153
Subterranean heat, utilizing.....18
Success, road to.....16
Sugar.....373
Sugar analysis.....154
Sugar mill, large.....* 18
Sugar, rag.....53
Sugar, solubility.....154
Sugar weuse.....391
Sun, total eclipse.....315
Sun flower and malaria.....90
Sun, utilizing heat of.....1, 191, *376
Superheater, Carvalho's.....*118
Survey, New York.....184
Surveys, government.....33, 383
Swallows and bedbugs.....354
Swivel hanger.....*98

T

Table, draughtsman's.....*114
Tags.....340
Tannery woods.....56
Tanning human skin.....(4) 171
Tanning, new process.....8, 135
Tea culture.....164
Tea plant in South America.....340
Teasel parasols.....148
Technical education, Huxley on..3
Teeth, caries of.....24
Teeth, hearing through.....342
Teeth, hinged fish.....145
Teeth and race.....98
Telegraph apparatus, new.....191
Telegraph cables, how destroyed..*73
Telegraph company, new.....53
Telegraph, fishery.....328
Telegraph, mouth.....346
Telegraph poles, catalpa.....266
Telegrapher, deaf mute.....108
Telegraphing without wires.....97
Telephone, Bell's.....23
Telephone, carbon.....*353
Telephone, cheap.....101
Telephone for divers.....282
Telephone an electroscope.....209
Telephone experiments.....120, 232
Telephone, genesis of.....144
Telephone, German names.....33, 68
Telephone, how to make.....(19) 155
Telephone magnets.....(10) 316
Telephone improvements.....409
Telephone in medicine.....308
Telephone, new details.....*341
Telephone notes...3, 17, 21, 23, 33, 36, *57, 89, 101, 104, 120, 144, 194, 230, 247, 308, *341
Telephone, Reis' musical.....*57
Telephone, renting.....104
Telephone, re-invention abroad..230
Telephone, singing.....3
Telephone and telegraph.....33, 36, (2) 267
Telephone, Trouvé.....17
Telephone, Trouvé's improved..*392
Telephone as time regulator.....21
Telephonic alarm.....*89
Telephonic sounds, intensity.....241
Temperature and health.....161
Tempering.....(29) 76, (31) 76, 118, (14) 123, (42) 124, (25) 155, (65) 188, (31) 208, (57) 251, (1) 299
Teredo and limnoria.....*73
Test paper.....1, 275, 396
Testing apparatus, Bailey's.....*180
Testing machine.....*69
Testing tissues, etc.....74
Tetanus in Long Island.....33
Textile fabrics, Japanese.....211
"That is near enough".....97
Theater, natural.....343
Thermometer, curious action.....120
Thermometer, registering.....*248
Thill coupling, Beard's.....*89
Thirst, effects.....60
Thought, rapidity of.....241
Three-sided question.....64
Thymol.....154, 324
Ticinese.....329
Tide of Lake Superior.....180
Tide mill.....*41
Timber, drying.....*114
Tin, mottling.....(7) 316
Tinning.....(25) 139, (36) 219
Tissues, testing.....74
Tobacco, labeling plug.....166
Toddy, gathering.....*167
Tolling machine.....71
Tool, new.....*181
Torpedo balloon.....*287
Torpedo boats.....266, *338
Torpedo experiments.....*82, 164, 292
Torpedo guard, Fisher's.....*54
Torpedo inventions wanted.....225
Torpedo, "momentum".....49
Tortoise, chelodine.....*87
Tortoise shell imitation.....117
Tracings, copying.....290
Trade, new.....97
Tragopan, horned.....*119
Trades unions.....100
Tramps.....340, 361
Tree growth.....(41) 251
Trees, longevity of.....88
Tree waste.....193
Triassic trap of N. J.....277
Trichinæ in shad.....339
Tricycles.....*41, *201, *296
Tunicin.....323
Tunnel arches, metallic.....*70
Tunnel, Hoosac.....41
Tunnel, St. Gothard.....353
Tunnel, Sutro.....52, 183
Turbot and sole.....96
Turning machine.....*271
Turning spheres.....*376
Type-setting in Japan.....277

U

Umbrella, waterproof.....(2) 316
Unscientific scientists.....48
Urine, nitric acid in.....69
Uvula, use of.....264

V

Valve gear, Collmann's.....386
Valve, safety.....*314
Vanilla.....74
Vaporizing heat, measuring.....*185
Vegetable anatomy.....296, *377
Vehicle, new.....*265
Vehicle spring, wooden.....*103
Velocipede, mechanics of.....304
Velocipede vs. pedestrianism.....116
Velocipede, power required..116, 165, 196, 304
Velocipede, railroad.....101
Velocipedes.....*41, *201, *296
Velvet, embossed.....290
Ventilators, mica.....195
Ventilator, Hinckley's.....*210
Venus's flytrap.....*377
Victor Emanuel.....122
Victor a regia.....*247
Vinegar, testing.....(1) 203
Virginia City sliding.....248
Vise, Stevens'.....*342
Voices of American women.....276
Volatilization.....7
Volcanoes, mud.....*34
Volcanoes, Nebraska.....8
Vortex rings.....276
Vulcan, supposed planet.....322
Vulcanized fiber.....10

W

Wages in France.....394
Wagon box fastener.....*290
Wagon buck board, Phillips'.....*166
Wagon jacks.....*297, *355
Walking 2,000 miles in 1000 hours..151
Wall paper, poisonous.....137
Walnut stain.....(14) 283
Walnut, oiling.....(4) 59, (32) 172
Walnut, polishing.....(78) 251
Walnut, waxed finish.....(9) 235
Warfare, new phase.....343
Washstand, novel.....72
Waste, utilization.....256
Watches, testing.....114
Watchmakers, hints for.....149
Water, decomposition.....(66) 251, 358
Water, new theory of.....24
Water, potability of.....3
Water, purifying.....(44) (47) 220, (10) 331
Water supply of New York.....49
Water supply of cities.....210
Water, testing.....3
Water vs. steam power.....58, 101
Water, taste of.....328
Water, walking on.....324
Water works, London.....371
Water courses, power of.....2
Water-proofing umbrellas.....(10) 123, (18) 187, (2) 316
Waterspouts.....297, *327
Waves and masonry.....263
Wax, floor.....(56) 188
Wax, modeling.....(11) 331
Weather reports, Herald.....177
Weather warnings.....177, 293
Weed destroying machines.....183
Weighing scoop, Mery's.....*29
Western industrial progress.....405
West, the industrial.....374
Whale in N. Y. bay.....344
Whales and whalebone.....*88
What kills.....249
What is wanted.....162
Wheat analysis.....3, 228
Wheat crop, coming.....409
Wheat, oiling.....213
Wheel, Deaderick's.....*308
Wick regulator.....*326
Wild beasts, destroying.....197, 250
Windmill, Smith's folding.....*33
Window shutter, paper.....*211
Wines, coloring principle.....328
Wire and paper tester.....*69
Wolf, red.....*183
Wood, drying.....*114
Wood, ebonizing.....(67) 251
Wood, European product.....178
Wood, seasoning.....(35) 204
Wood preserving.....145, 168
Wood, protection against fire.....42
Wood, staining.....(36) 300
Woods of Bahama.....102
Woods, polishing.....(27) 187
Woods, tanning.....56
Woods, turnery.....90
Woody fiber, test of.....391
Wool, Californian.....339
Wool sorters, disease.....278
Wool, testing.....74
Women's hotel.....209
Workmanship, American.....385
Workingmen, French.....358
Workmen, warning to.....213
Workshop appliances, new.....*245
Wounds, antiseptic treatment.....113
Wounds, remarkable.....341
Wrecks, Atlantic.....194
Wrench, pipe.....*264, *281

Y

Yachts, steam.....3, 259
Yankee notions.....340
Yarn, twisted.....319
Yellowstone park.....39, 100

Z

Zero.....(30) 107, 139
Zinc, cleaning.....(82) 251
Zinc, to polish.....(9) 43


© 1878 SCIENTIFIC AMERICAN, INC

## Advertisements.

**Inside Page, each insertion - - - 75 cents a line.**
**Back Page, each insertion - - - - $1.00 a line.**
(About eight words to a line.)

*Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.*

# Circular Plane.

**PRICE $4.**

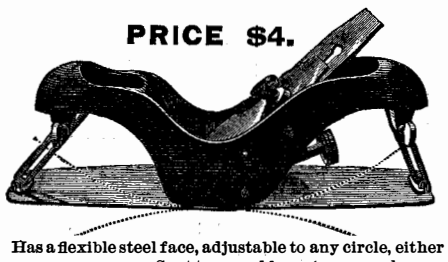

Has a flexible steel face, adjustable to any circle, either concave or convex. Sent to any address (express charges *prepaid*) on receipt of price, $4. We make all styles of Iron Planes. Send for an Illustrated price list to

**BAILEY WRINGING MACHINE CO.,**
**99 Chambers St., New York.**

---

**RUSK'S WHITE SAFETY INK.**
Pure white on colored paper. Cannot be erased by mechanical or chemical means. Prevents check raising. A novelty. Bottle 50c., expressed. S. E. Rusk, Catskill, N. Y.

---

Patent Wood-working Machinery, Band Saws Scroll Saws, Friezers, etc. Cordesman, Egan & Co., Cincin'ti, O.

---

## MINTON'S TILES.

Art, Decorative and Flooring. Remit 9 cents postage for circulars. Anderson Merchant & Co., 53 Broadway, N. Y.

---

**CAREY'S PATENTED**
## COMBINATION NEEDLE.



A sewing machine needle and thread cutter combined. The particular advantage of this combination is to have a cutter for severing the thread at the nearest possible point to the operator and always ready for use. Parties who have used the various devices for cutting the thread have discontinued their use after trying the combination needle. Sewing machine companies who wish the exclusive control of their own needle with the cutter, and general agents of sewing machines, will be supplied with samples on application to the

DOMESTIC NEEDLE WORKS CO.,
Middleborough, Mass.

---

**IT PAYS** to sell our Rubber Stamps and Novelties. Terms free. G. A. HARPER & BRO., Cleveland, O.

---

A RECIPE FOR CURING CONSUMPTION GIVEN gratis by DR. H. JAMES, 1032 Race St., Philada.

---

DYSPEPSIA. BY DR. C. F. KUNZE. Symptoms. Appetite Diminished. Stomach Digestion much slower than Normal. Constipation. Symptoms in Children. Chronic Cases. Dyspepsia as caused by too much Food; by Indigestible Food; by General Derangement; by Altered Conditions of Innervation. Treatment. Nourishment should be Easily Digestible; taken Little at a Time; and Digested before more is taken. Necessity of Few and Plain Dishes. Treatment when Stomach is Overloaded. Aiding Gastric Juice. Treatment in Febrile Diseases. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. 129. Price 10 cents. To be had at this office and of all newsdealers.

---



BARNES' FOOT POWER MACHINERY.

13 Different machines with which Builders, Cabinet Makers, Wagon Makers, and Jobbers in miscellaneous work can compete as to QUALITY AND PRICE with steam power manufacturing; also Amateurs' supplies. MACHINES SENT ON TRIAL.

Say where you read this, and send for catalogue and prices.

W. F. & JOHN BARNES,
Rockford, Winnebago Co., Ill.

Eastern Agency for

**Barnes' Foot Power Machinery.**

*Full line in stock* at factory prices. Can be seen in operation at CHAS. E. LITTLE'S, 59 Fulton St., N. Y. *Cast Steel Pump Log Augers and Reamers* a specialty.

---

# BELT PULLEY,

Lightest, strongest, and best made. Secured to the Shaft without Keys, Set Screws, Bolts or Pins; also, *Adjustable Dead Pulleys* and *Taper-Sleeve Couplings*. Send for catalogue. Address Taper-Sleeve Pulley Works, Erie, Pa.

---

**Patent Portable Chuck Jaws.**
Improved Solid Emery Wheels, for grinding Iron and Brass Castings, Tools, etc. Manufactured by AM. TWIST DRILL CO., Woonsocket, R. I.

---

**SPANISH CEDAR**
## CIGAR-BOX LUMBER!
**Finished Ready for Use.**

**First Quality at 3¾c. Second Quality at 2¾c.**
**POPLAR—1st Quality at $15 per M. Feet; 2d Quality at $13.50 per M. Feet.**

**BUNDLING AND CARTAGE ADDITIONAL.**

Above prices will remain until advised. No order received for less than 1,000 feet.

**GEO. W. READ & CO.,**
**186 to 200 Lewis St., New York.**

---

**"THE EAGLE CLAW."**
The best Trap in the World for catching
**FISH, ANIMALS & GAME.**



One bait will catch
**Twenty Fish.**

No. 1, for ordinary fishing, small game, &c. 35c.
No. 2, for large fish, mink, musk-rats &c. 75c.
Sent by mail. **J. BRIDE & CO.,**
Mfrs., 297 Broadway, New-York.
Send for Catalogue of useful novelties and mention this paper.

---

# Telephones.

How to make and adjust them. Send stamp for full description and all needed instructions, with prices of MAGNETS, FINE WIRE, BOBBINS, ETC. ONE PAIR FIRST-CLASS TELEPHONES complete, except diaphragms, sent to any address upon receipt of $4.00. J. H. BUNNELL, Electrician, 112 Liberty St., New York.

---

*Founded by Mathew Carey, 1785.*

# BAIRD'S BOOKS
## FOR PRACTICAL MEN.

To our business of Industrial Publishers, we have added that of Industrial Booksellers and Importers, and have now on hand a valuable stock of ENGLISH AND AMERICAN PRACTICAL AND SCIENTIFIC BOOKS, including the most recent issues from the English and American press.

☞ OUR NEW AND ENLARGED CATALOGUE OF PRACTICAL AND SCIENTIFIC BOOKS—96 pages, 8vo—sent free to any one who will furnish his address.

☞ TWO NEW CATALOGUES OF BOOKS AND PAMPHLETS ON SOCIAL SCIENCE, POLITICAL ECONOMY, THE FINANCES, BANKING, POPULATION, PAUPERISM, POLITICS, POLITICAL BIOGRAPHY, AND KINDRED SUBJECTS, comprising a most extensive and valuable collection. Sent free upon application.

HENRY CAREY BAIRD & CO.,
Industrial Publishers, Booksellers, and Importers,
**810** Walnut Street, Philadelphia.

---



## Improved HOISTING ENGINES.

**Speedwell Iron Works,**
ESTABLISHED 1801.
**Office 96 Liberty St., N. Y.**
**P. O. Box 2132.**

---

**FOR SALE.**

The machine shop and die sinking establishment of George A. Crosby (Chicago), deceased. It is a good opportunity, and will be sold much below original cost. For particulars, address

J. L. BOARD, 2 North State St., Chicago, Ill.

---

**WHISKERS** can be grown on the smoothest face in a few weeks by the use of **INCINO**, a New discovery. One bottle **Free.** Send stamp for particulars. **INCINO CO., 264 Main St., Cincinnati, Ohio.**

---

## Steel Name Stamps.

**N. Y. STENCIL WORKS, 87 Nassau St., N. Y.**

---

**$1200** **Salary.** Salesmen wanted to sell our Staple Goods to dealers. No peddling. **Expenses** paid. Permanent employment. address S. A. GRANT & CO., 2, 4, 6 & 8 Home St., Cincinnati, O.

---

**65** MIXED CARDS, with name, 10c. and stamp. Agent's Outfit, 10c L. C. COE & CO., Bristol, Ct.

---



## THE BROWN CALORIC ENGINE.
**Superior to any Hot Air Motor in Market,**

Is the most perfect substitute for any other power. Its special merits are: Noiseless motion, simple construction and durability. The consumption of fuel is about 2½ pounds per horse-power and per working hour. Accidents of explosive nature are impossible. No water tax. No extra insurance. *Replenishing the fire does not cause any stoppage or slacking of the power.* These machines can be seen in sizes of 3½, 7 and 14 horse power, at the

BROWN CALORIC ENGINE CO., 57, 59 & 61 Lewis St., N. Y.
Larger sizes per contract. Apply for illustrated price list.

---

## Aug. P. Brown's Safety Steam Engine Governor.

Apply for circular. 57, 59 and 61 Lewis St., New York.

---

## WROUGHT IRON BEAMS & GIRDERS

THE UNION IRON MILLS, Pittsburgh, Pa., Manufacturers of improved wrought iron Beams and Girders (patented).

The great fall which has taken place in the prices of Iron, and especially in Beams used in the construction of FIRE PROOF BUILDINGS, induces us to call the special attention of Engineers, Architects, and Builders to the undoubted advantages of now erecting Fire Proof structures; and by reference to pages 52 & 54 of our Book of Sections—which will be sent on application to those contemplating the erection of fire proof buildings—THE COST CAN BE ACCURATELY CALCULATED, the cost of Insurance avoided, and the serious losses and interruption to business caused by fire; these and like considerations fully justify any additional first cost. It is believed, that, were owners fully aware of the small difference which now exists between the use of Wood and Iron, in many cases the latter would be adopted. We shall be pleased to furnish estimates for all the Beams complete, for any specific structure, so that the difference in cost may at once be ascertained. Address

CARNEGIE, BROS. & CO., Pittsburgh, Pa.

---

## Lathes, Planers, Shapers

Drills, Bolt and Gear Cutters, Milling Machines. Special Machinery. E. GOULD & EBERHARDT, Newark, N. J.

---

**50** Best Mixed Cards, with name, in case, 13c., or 25 no 2 alike, 10c. Outfit 10c. Dowd & Co., Bristol, Ct.

---

# Pond's Tools,

**Engine Lathes, Planers, Drills, &c.**

Send for Catalogue. DAVID W. POND, Successor to LUCIUS W. POND. **Worcester, Mass.**

---

**$3** **GOLD PLATED WATCHES.** Cheapest in the known world. *Sample Watch Free to Agents.* Address, A. COULTER & Co., Chicago.

---

## PATENT MINERAL WOOL.

Entirely *Fireproof*, undecaying, and the best *non-conductor of heat, cold, or sound.* Cheaper than hair-felt.

A. D. ELBERS,
*P. O. Box* 4461. 261½ Broadway, N. Y.

---

# THE TRIBUNE
## UNEXAMPLED PREMIUM!
### GET THE BEST.

## Webster's Great Unabridged Quarto Dictionary.

THE LATEST AND BEST ($12) EDITION, containing **3,000** ILLUSTRATIONS and COLORED PLATES.

SENT TO ANY ONE

remitting, prior to September 1st, 1878:

**$16** for Eight One-Year Subscriptions to THE WEEKLY; or
**$30** for Ten One-Year Subscriptions to THE SEMI-WEEKLY; or
**$10** for a Single Five-Years' Subscription, in advance, to THE WEEKLY; or
**$15** for a Single Five-Years' Subscription, in advance, to THE SEMI-WEEKLY.

**The Popular Approval of this Premium has been something utterly Unprecedented.**
THE TRIBUNE is now delivering the

*NINTH THOUSAND*

of these GREAT QUARTO DICTIONARIES to subscribers who have fully complied with its terms. Not one man out of the whole number has expressed himself dissatisfied with the result. All express two feelings—amazement and gratitude.

Address **THE TRIBUNE,**
New York City.

---

FORCE OF WIND. HOW TO ESTIMATE the Necessary Strength of Roofs, Towers, Tall Chimneys, etc., to withstand the Wind. The Solution of all Problems of the kind, with numerous Formula. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. **109.** Price 10 cents. To be had at this office and of all newsdealers.

---

## PATENTS SOLD.

For terms, address EUROPEAN and UNITED STATES PATENT EXCHANGE, 200 Broadway, N. Y. Box 2801.

---

SPARE THE CROTON AND SAVE THE COST.

## Driven or Tube Wells

furnished to large consumers of Croton and Ridgewood Water. WM. D. ANDREWS & BRO., 414 Water St., N. Y., who control the patent for Green's American Driven Well.

---

**25** NEW YEAR CARDS, with name, 20c. **25** Extra Mixed, 10c. Geo. I. Reed & Co., Nassau, N. Y.

---

**PATENTS AT**
# AUCTION.

Regular Monthly Sales the first week of each month by George W. Keeler, Auctioneer, at his salesrooms, 53 and 55 Liberty Street, N. Y. For terms, etc., address The New York Patent Exchange, 53 Liberty St., N. Y.

---

BURNHAM'S
STANDARD TURBINE
WATER WHEEL.
WARRANTED BEST AND CHEAPEST.
N. F. BURNHAM, YORK, PA.

---

**Agents Wanted on Salary or Commission** in every **Lodge, Chapter** and **Commandery** in the U. S. to control the sale of our Rituals to make **rusty** masons **bright.** None but **Masons** need apply. **Masonic Book Agency,** S. W. Cor. Broadway and Warren St., New York.

---

## THE DRIVEN WELL.

Town and County privileges for making **Driven Wells** and selling Licenses under the established **American Driven Well Patent,** leased by the year to responsible parties, by

**WM. D. ANDREWS & BRO.,**
NEW YORK.

---

**$250.** HEALD, SISCO & CO.'S **"RELIABLE"** 20 Horse Power, Stationary, Horizontal, Double-crank Steam Engine. Complete with Judson Governor, Boiler-feed Pump, Water Heater, etc. Best and cheapest in the world, and fully guaranteed. TWO HUNDRED AND FIFTY DOLLARS. Send for circular to

HEALD, SISCO & CO., Baldwinsville, N. Y.

---

## DUC'S ELEVATOR BUCKET,

**For use in Flour Mills, Grain Elevators, Sugar Refineries, etc.** Made of Charcoal Stamping Iron, extra strong and durable. No corners to catch. Many thousands in use

**T. F. ROWLAND, Sole Manufacturer, Brooklyn, N. Y.**

---

## WALTHAM WATCHES.

We beg to announce that we have recently entirely remodeled the very popular grades of full-plate movements, known by the marks, "Wm. Ellery," "Appleton, Tracy & Co.," "Waltham Watch Co.," "P. S. Bartlett," and "Broadway," giving to them not only a highly improved appearance, but great additional value. We embody in them such of the best results of our experience and study for twenty years as can be useful in this popular form of watch. We give these new model watches special recommendation to all who look for good performance and solid excellence at moderate cost. The alterations have been made with the view of pleasing practical watch makers, as well as watch wearers.

No watches retailed by the Company. Apply to your local jeweler.

*For AMERICAN WATCH CO.,*

ROBBINS & APPLETON,
General Agents,
NEW YORK.

---

## !!New and Improved!! Engraving Process!!!!

**Perfect Substitute for Wood-Cuts.**

ARTISTIC PRINTING. **Photo-Plate Company** FINE ELECTROTYPING.
**63 Duane St. New York.**

Can be printed on an ordinary Press.
RELIEF PLATES in hard Type Metal FOR Newspaper & Book Illustration.
Send Stamp for Illustrated Circular.
MUCH CHEAPER THAN WOODCUTS.

State where you saw this.

---

PUBLIC SALE OF VALUABLE MANUFACTURING PROPERTY.—All the property of the Belvidere Manufacturing Co. will be sold at public auction, without reserve, on Tuesday, July 9th, next, at 2 o'clock, P. M., on the premises, at Belvidere, Warren Co., N. J. It consists of a lot, advantageously situated, about 200x250 feet, on which are erected a four-story brick and stone building 50x80 feet, with frame buildings for foundry and smith shop. Never failing water power, 300 inches of water drawn under 2½ ft. head—18 feet head and fall. Property is adapted to almost any kind of manufacturing business—is accessible to market—in a rich agricultural neighborhood, convenient to the coal and iron regions of Pennsylvania, and to abundant supplies of hard wood and other lumber. At the same time will be sold a number of iron and wood working machines, and 1,600 acres of timber land in the State of Maine. For particulars, address

THE BELVIDERE M'F'G CO., Belvidere, N. J.

---

## Baker Rotary Pressure Blower.



(FORCED BLAST.)
Warranted superior to any other.

WILBRAHAM BROS.
2318 Frankford Ave.
PHILADELPHIA.

---

**AGENTS WANTED** for the *Best* and *Fastest-Selling* Pictorial Books and Bibles. Prices reduced **33** per cent. Address NATIONAL PUBLISHING CO., Philadelphia, Chicago, or St. Louis.

---

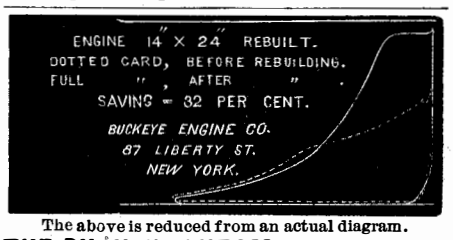


The above is reduced from an actual diagram.

## THE BUCKEYE AUTOMATIC ENGINES

at moderate cost. Increased power. High economy. Absolute regulation guaranteed. Estimates furnished on description. BUCKEYE ENGINE CO.,
87 Liberty Street, New York.

---

ENGLAND.—Merchant, with established agencies in best towns, is open to treat with patentees and others. C. D., 46a Union Passage, Birmingham, England.

---

## FOR SALE.

Fine English Amateur Lathe, nearly new; two slide rests; a splendid elliptic-eccentric and other chucks; geometric and other instruments; overhead apparatus and 100 tools. Also, new Hand Planer, 30x14 in. Address J. C. M., Box 5645, P. O., New York.

---



KREIDER, CAMPBELL & CO, 1030 Germantown Ave., Phila., Millwrights, Steam Engine Builders, and Mill Stone Manufacturers. Contractors for Paper, Flour, Malt, and Saw Mills, Breweries, Paint, Drug, and Chemical Works, Portable Mills, Hoisting Machines, and Patent Mill for Grinding Bones, Fertilizers, etc., Patent Paint Mills, Mill Bushes, Proof Staffs, Straight Edges, Bolting Cloth, Conveyors, Mill Furnishers. All orders for Jobbing promptly attended to. Trimmer's Patent Smutter, Grain and Scouring Machines.

---

# BONE MILLS.

The best in the world. 5 sizes, adapted perfectly for Crushing and Grinding Minerals and all hard substances. Grinding surfaces quickly and cheaply renewed. Send for descriptive pamphlet.

**BAUGH & SONS,**
**PHILADELPHIA, PA.**

---

## Diamonds and Carbon

Shaped or Crude, furnished and set for Boring Rocks, Dressing Mill Burrs, Emery Wheels, Grindstones, Hardened Steel, Calender Rollers, and for Sawing, Turning, or Working Stone and other hard substances; also Glaziers' Diamonds. J. DICKINSON, 64 Nassau St., N. Y.

---



Domestic Semi-Portable Engine,
2 and 4 horse power, and
The Peerless Portable Steam Engine,
for Agricultural and other purposes, from 6 to 10 horse power.

Nothing cheap but the price. Send for descriptive catalogue and price list to

**F. F. & A. B. LANDIS, M'f'rs.**
**Cherry St., Lancaster, Pa.**

© 1878 SCIENTIFIC AMERICAN, INC

## Advertisements.

**Inside Page, each insertion - - - 75 cents a line.**
**Back Page, each insertion - - - $1.00 a line.**
(About eight words to a line.)

*Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.*

**THE EUREKA SCROLL SAW MACHINE** is the best in use. For circulars, etc., address the patentee and manufacturer, Jerome S. Moseley, Syracuse, N. Y.

**WOOD WORKING MACHINERY.**

**J. A. FAY & CO.**
CINCINNATI, O. U. S. A.

ESTABLISHED 1844.

**JOSEPH C. TODD,**

ENGINEER and MACHINIST. Flax, Hemp, Jute, Rope, Oakum and Bagging Machinery, Steam Engines, Boilers, etc. I also manufacture Baxter's New Portable Engine of 1877. Can be seen in operation at my store. A one horse-power, portable engine, complete, $125; two horse-power, $225; two and a half horse-power, $250; three horse-power, $275. Manufactured exclusively by

**J. C. TODD,**
10 Barclay St., New York, or Paterson, N. J.

**Pyrometers.** For showing heat of Ovens, Hot Blast Pipes Boiler Flues, Superheated Steam, Oil Stills, &c.
HENRY W. BULKLEY, Sole Manufacturer,
149 Broadway, N. Y.

**EVERY MAN HIS OWN PRINTER!**

**$3 Press** Prints labels, cards etc. (Self-inker $5) 9 Larger sizes For business, pleasure, young or old Catalogue of Presses, Type, Etc., for 2 stamps. KELSEY & Co. Meriden, Conn

**Mill Stones and Corn Mills.**

We make Burr Millstones, Portable Mills, Smut Machines, Packers, Mill Picks, Water Wheels, Pulleys, and Gearing, specially adapted to Flour Mills. Send for catalogue.
J. T. NOYE & SON, Buffalo, N. Y.

**WARRANTED THE BEST.**
**1 H. P. Boiler & Engine, $150.**
**2 H. P., $175. 3 H. P., $200.**
Tested to 200 lbs. Steam.
LOVEGROVE & CO.,
152 N. 3d St., Philadelphia, Pa.,
Builders of Engines and Boilers, 1 to 100 horse power. Send for circulars and prices, and state size and style you want.

**CAMERON Steam Pumps**

For Mines, Blast Furnaces, Rolling Mills, Oil Refineries, Boiler Feeders, &c.
For Illustrated Catalogue and *Reduced* Price List send to Works, Foot East 23d St., New York.

**PORTLAND CEMENT,**
ROMAN & KEENE'S. For Walks, Cisterns, Foundations, Stables, Cellars, Bridges, Reservoirs, Breweries, etc. Remit 10 cents for Practical Treatise on Cements.
S. L. MERCHANT & Co., 53 Broadway, New York

**Ithaca Calendar Clock.**

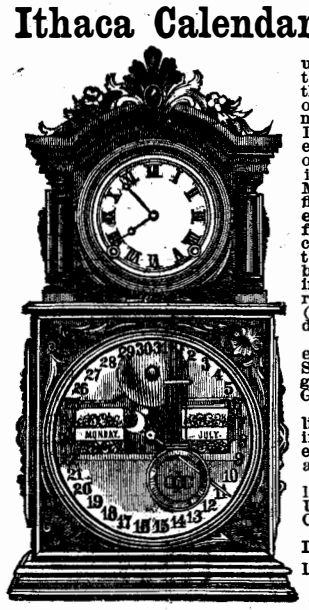

Indicates perpetually the hour of the day, the day of the week, the day of the month, the month of the year. Indispensable in every business office. A necessity in every house. Manufactured in fifteen (15) different styles, to suit, from the most common house to the most elaborate banking or counting house, prices ranging from ten (10) to fifty (50) dollars.
Calendars printed in English, Spanish, Portuguese, French, and German languages.
Catalogues, price lists mailed and inquiries answered promptly on application.
For sale by all leading jewelers in United States and Canada.
Manufactory at Ithaca, N. Y.
ITHACA CALENDAR CLOCK CO.

**PUMPING.** Rider Compression Engine. No steam, noise, or danger. Especially for suburban residences. Pumps 2,000 to 200,000 gallons water per day.
CAMMEYER & SAYER,
93 Liberty St., N. Y.

**EAGLE TUBE CO.,**
95 LIBERTY ST., NEW YORK.
BOILER FLUES of all the Regular Sizes,
Of Best Material and Warranted.
☞ ORDERS PROMPTLY EXECUTED.
No Payment Required till Tubes are Fully Tested and Satisfactory.

MEDAL & PREMIUM AWARDED TO
TURBINE WATER ALCOTT'S
MANUFACT'D AT MOUNT HOLLY N.J.

**MARVIN'S**
FIRE & BURGLAR
**SAFES**
COUNTER PLATFORM WAGON & TRACK
**SCALES**
MARVIN SAFE & SCALE CO.
265 BROADWAY. N.Y.

An assortment of
**WOOD-WORKING MACHINERY**
made by Richards, London & Kelley (dissolved); also, a number of first-class **MACHINE TOOLS** (nearly as good as new) of Philadelphia construction, on hand and for sale. For list or inspection of machines and estimates, apply at the works of JOHN RICHARDS & CO., 22d and Wood Sts., Philadelphia, manufacturers of Standard Gauges and other Implements.

**MACHINISTS' TOOLS.**
NEW AND IMPROVED PATTERNS.
Send for new illustrated catalogue.
Lathes, Planers, Drills, &c.
NEW HAVEN MANUFACTURING CO.,
New Haven, Conn.

**TO INVENTORS AND MANUFACTURERS**

FOLLOWS & BATE, Manchester, England, Hardware and Machinery Merchants, are prepared to buy American Goods for Cash, and to act as Sole Wholesale Agents.

**ROOTS' ROTARY HAND BLOWER.**

**FOR ALL KINDS OF**
**BLACKSMITHING.**
**DOES MORE AND**
**BETTER WORK,**
SAVES ROOM, LABOR, AND COAL, AND LASTS
**TEN TIMES LONGER THAN BELLOWS.**
P. H. & F. M. ROOTS, Manuf'rs, CONNERSVILLE, IND.
S. S. TOWNSEND, Gen'l Ag't, 6 Cortlandt St., NEW YORK.

**WIRE ROPE**
Address JOHN A. ROEBLING'S SONS, Manufacturers, Trenton, N. J., or 117 Liberty Street, New York.
Wheels and Rope for conveying power long distances. Send for circular.

**Bound Volumes**
OF THE
**Scientific American.**

**At present,** I have on hand the following **bound** Volumes of the SCIENTIFIC AMERICAN, which I will sell at $1.00 each, either singly or by the quantity.

| OLD SERIES. | NEW SERIES. | NEW SERIES. |
|---|---|---|
| Vol. 11....1 Copy. | Vol. 1.... 1 Copies. | Vol. 15.. 3 Copies. |
| " 13....1 " | " 2... 1 " | " 16.. 2 " |
| | " 4... 3 " | " 28.. 2 " |
| | " 10... 3 " | " 32.. 6 " |
| | " 11... 2 " | |

Vols. of the Old Series contain one year's numbers, and the New Series six months.

The books will be sent by express on receipt of price. Address all communications to
JOHN EDWARDS,
P. O. Box 773, New York.

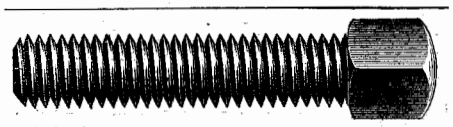

EVERY DESCRIPTION OF STEEL, IRON, and Brass Screws for Machinery. Send for Catalogue.
L. F. STANDISH & CO.,
26 Artisan Street, New Haven, Ct.

**PUNCHING PRESSES.** DROP HAMMERS AND DIES, FOR working Metals, &c.
The STILES & PARKER PRESS CO.,
Middletown, Conn.



**YALE VERTICAL MILL**
Iron Frame; French Burr; Self-oiling; Self-feeding; Long Bearings; Adjustable-balanced; best arranged, made and finished, *cheapest*, and for quality and quantity ground no superior in the world. Also the Yale Vertical and Horizontal Steam Engines and Boilers. Send for Circular.
YALE IRON WORKS, New Haven, Conn.



**SHEPARD'S CELEBRATED**
**$50 Screw Cutting Foot Lathe.**
Foot and Power Lathes, Drill Presses, Scroll, Circular and Band Saws, Saw Attachments, Chucks, Mandrills, Twist Drills, Dogs, Calipers, etc. Send for catalogue of outfits for amateurs or artisans.
H. L. SHEPARD & CO.,
88, 90 & 92 Elm St.,
Cincinnati, Ohio.

**TO ADVERTISERS!** We will send free to all applicants who do any newspaper advertising, the THIRD EDITION of
**AYER & SON'S MANUAL**
**FOR ADVERTISERS.** 160 8vo. pp. More complete than any which have preceded it. Gives the names, circulation, and advertising rates of several thousand newspapers in the United States and Canada, and contains more information of value to an advertiser than can be found in any other publication. All lists have been carefully revised, and where practicable prices have been reduced. The special offers are numerous and unusually advantageous. Be sure to send for it before spending any money in newspaper advertising. Address N. W. AYER & SON, ADVERTISING AGENTS, Times Building, Philadelphia.

LAP WELDED CHARCOAL IRON
Boiler Tubes, Steam Pipe, Light and Heavy Forgings, Engines, Boilers, Cotton Presses, Rolling Mill and Blast Furnace Work.
READING IRON WORKS,
261 South Fourth St., Phila.



THE ONLY Genuine GEISER SELF-REGULATING GRAIN SEPARATOR. Celebrated for its light and smooth movements, also SEPARATING and CLEANING all kinds of grain Manufactured only by
THE GEISER M'F'G Co., Waynesboro, Franklin Co., Pa.

**$7** A DAY to Agents canvassing for the Fireside Visitor. Terms and Outfit Free. Address P. O. VICKERY, Augusta, Maine.

WATSONS NON CHANGEABLE GAP LATHE HAS GREAT FACILITIES FOR LARGE OR MEDIUM SIZE WORK JAMES WATSON MANF'R 1608 S. FRONT ST. PHILA PA.

**MILLS**



For Crushing Bones, Fire Brick, Clay, Phosphates, Hoofs, Horn, also for Grinding Wheat, Tobacco, Paint, Slate, Corn, Sumac, Coal, Chalk, Bark, Coffee, Black Lead, Saltpetre, Cochineal, Spices, Ores, and many other substances, Shafting, Pulleys and Machinery in general, Manufactured by
WALKER BROS. & CO.,
23rd and Wood Streets, Philadelphia.

**Wood-Working Machinery,**
Such as Woodworth Planing, Tonguing, and Grooving Machines, Daniel's Planers, Richardson's Patent Improved Tenon Machines, Mortising, Moulding, and Re-Saw Machines, and Wood-Working Machinery generally. Manufactured by
WITHERBY, RUGG & RICHARDSON,
26 Salisbury Street, Worcester, Mass.
(Shop formerly occupied by R. BALL & CO.)

IMPORTANT FOR ALL CORPORATIONS AND MANF'G CONCERNS.—**Buerk's Watchman's Time Detector,** capable of accurately controlling the motion of a watchman or patrolman at the different stations of his beat. Send for circular.
**J. E. BUERK, P. O. Box 979, Boston, Mass.**
N. B.—The suit against Imhaeuser & Co., of New York, was decided in my favor, June 10, 1874. A fine was assessed against them Nov. 11, 1876, for selling contrary to the order of the court. Persons buying or using clocks infringing on my patent will be dealt with according to law.

B. W. Payne & Sons, Corning, N. Y.
Established in 1840.

**Eureka Safety Power.**

| h.p. | cyl. | ht. | space. | wt. | price. |
|---|---|---|---|---|---|
| 2 | 3½x4 | 48 in. | 40x25 | 900 | $150 |
| 4 | 4x6 | 56 | 46x30 | 1600 | 250 |
| 6 | 5x7 | 72 | 72x42 | 2700 | 400 |

*Also,* SPARK ARRESTING PORTABLES, *and* Stationary Engines *for Plantations.* Send for Circulars.

**THERMOMETERS** At Reduced Prices. Opera Glasses, Spectacles, Telescopes, Microscopes. Send for Illustrated Catalogue. R. & J. BECK,
921 Chestnut St., Philadelphia.

*PERFECT*
**NEWSPAPER FILE**

The Koch Patent File, for preserving newspapers, magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of $1.50 by mail, or $1.25 at the office of this paper. Heavy board sides; inscription "SCIENTIFIC AMERICAN," in gilt. Necessary for every one who wishes to preserve the paper.
Address
MUNN & CO.,
Publishers SCIENTIFIC AMERICAN.

**THE TANITE CO.,**
STROUDSBURG, PA.
**EMERY WHEELS AND GRINDERS.**
GEO. PLACE, 121 Chambers St., New York Agent.

**ROCK DRILLING MACHINES AND AIR COMPRESSORS.**
MANUFACTURED BY BURLEIGH ROCK DRILL CO.
SEND FOR PAMPHLET. FITCHBURG MASS.

**STEAM PUMPS.**
HENRY R. WORTHINGTON,
239 Broadway, N. Y. 83 Water St., Boston.
THE WORTHINGTON DUPLEX PUMPING ENGINES FOR WATER WORKS—Compound, Condensing or Non-Condensing. Used in over 100 Water-Works Stations.
STEAM PUMPS—Duplex and Single Cylinder.
WATER METERS. OIL METERS.
Prices Largely Reduced.

HARTFORD
STEAM BOILER
Inspection & Insurance
COMPANY.
W. B. FRANKLIN V. Pres't. J. M. ALLEN, Pres't.
J. B. PIERCE, Sec'y.

**PATTERN LETTERS** KNIGHT BROS. SENECA FALLS N.Y.

**ICE AT $1.00 PER TON.**
The PICTET ARTIFICIAL ICE CO.,
LIMITED,
Room 51, Coal and Iron Exchange, P. O. Box 3083, N. Y.

FOR ALL KINDS OF MACHINERY—Apply to S. C. HILLS, 78 Chambers St., New York.

DAMPER REGULATORS **BEST** AND WEIGHTED GAUGE COCKS.
MURILL & KEIZER, 44 HOLLIDAY ST., BALTIMORE.

***Working Models***
And Experimental Machinery, Metal or Wood, made to order by J. F. WERNER, 62 Centre St., N. Y.

**CAVEATS, COPYRIGHTS, TRADE MARKS, ETC.**

Messrs. Munn & Co., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine Improvements, and to act as Solicitors of Patents for Inventors.

In this line of business they have had OVER THIRTY YEARS' EXPERIENCE, and now have *unequaled facilities* for the preparation of Patent Drawings, Specifications, and the Prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Trade Mark Regulations, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very moderate terms.

We send free of charge, on application, a pamphlet containing further information about Patents and how to procure them; directions concerning Trade Marks, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases, Hints on the Sale of Patents, etc.

***Foreign Patents.***—We also send, *free of charge*, a Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world. American inventors should bear in mind that, as a general rule, any invention that is valuable to the patentee in this country is worth equally as much in England and some other foreign countries. Five patents—embracing Canadian, English, German, French, and Belgian—will secure to an inventor the exclusive monopoly to his discovery among about ONE HUNDRED AND FIFTY MILLIONS of the most intelligent people in the world. The facilities of business and steam communication are such that patents can be obtained abroad by our citizens almost as easily as at home. The expense to apply for an English patent is $75; German, $100; French, $100; Belgian, $100; Canadian, $50.

***Copies of Patents.***—Persons desiring any patent issued from 1836 to November 26, 1867, can be supplied with official copies at reasonable cost, the price depending upon the extent of drawings and length of specifications.

Any patent issued since November 27, 1867, at which time the Patent Office commenced printing the drawings and specifications, may be had by remitting to this office $1.

A copy of the claims of any patent issued since 1836 will be furnished for $1.

When ordering copies, please to remit for the same as above, and state name of patentee, title of invention, and date of patent.

A pamphlet, containing full directions for obtaining United States patents sent free. A handsomely bound Reference Book, gilt edges, contains 140 pages and many engravings and tables important to every patentee and mechanic, and is a useful hand book of reference for everybody. Price 25 cents, mailed free.

Address
MUNN & CO.,
Publishers SCIENTIFIC AMERICAN,
37 Park Row, N. Y.
*BRANCH OFFICE—Corner of F and 7th Streets, Washington, D. C.*

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Philadelphia, and 59 Gold St., New York.

© 1878 SCIENTIFIC AMERICAN, INC